



REERAY R6 Bone Conduction Headset User Manual

[Home](#) » [REERAY](#) » REERAY R6 Bone Conduction Headset User Manual 

Contents

- [1 REERAY R6 Bone Conduction Headset](#)
- [2 Overview](#)
- [3 Packing List](#)
- [4 Use Instructions](#)
- [5 Basic Operations](#)
- [6 Storage & maintenance](#)
- [7 Troubleshooting](#)
- [8 Warranty](#)
- [9 Documents / Resources](#)
- [10 Related Posts](#)




REERAY R6 Bone Conduction Headset



Overview

1. Power on/off
2. "+" Next
3. "-Previous
4. Microphone
5. Indicator light
6. Magnetic suction charging port
7. Data transfer & charging cable

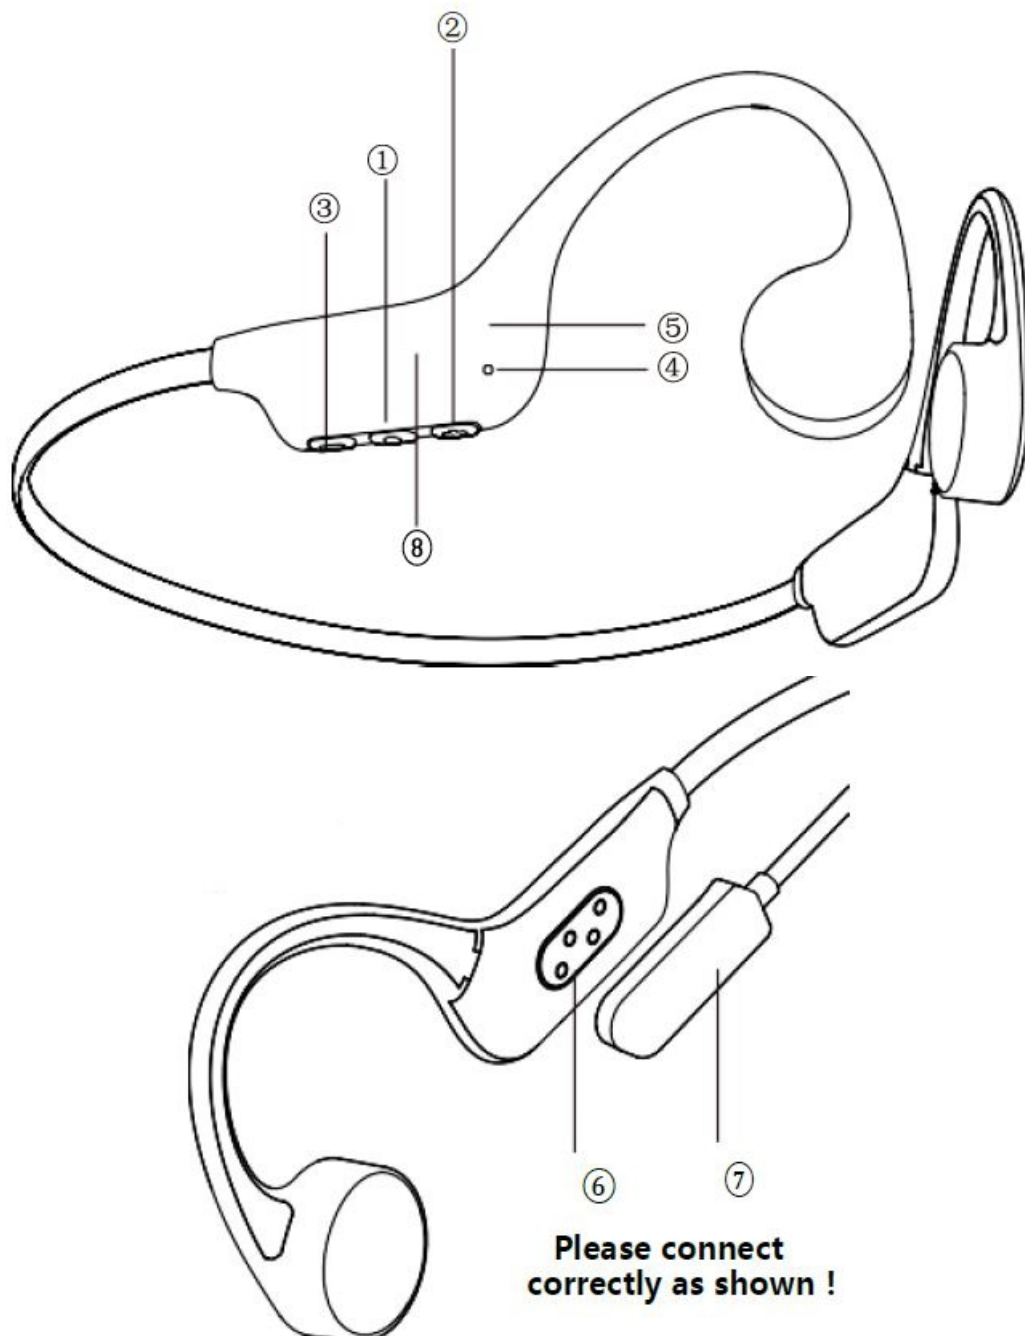

Packing List

1. Headset*1
2. User manual*1
3. Charging cable*1

Use Instructions

Power on /off:

Press and hold the on/off button for 3 seconds until the indicator light flashes white and blue.

Pairing Method:

- keep the headphone in the range of 1 meter if it's the first boot pairing
- When the red and blue light flashes alternately. it means the headphone enters the automatic BT pairing mode.
- Open your smart device and find "REERAY R6" from the BT list. Click on the connection. And the blue light flashes slowly when connected successfully.

How to switch between BT mode and MP3 mode?

The headset is in Bluetooth mode by default. When the headset is on, press the "power on" button twice in a row to switch to MP3 mode. The same operation to switch to BT mode.

How to charge the headphone?

The battery capacity of the headphone will be displayed on the phone. When the headset prompts "Low power", it indicates that the battery is low, please charge the headphone in time. The anti-dull magnetic suction charging port is designed to ensure proper connection. If it does not automatically suction close, please check if it is in the correct position.

How to download or cancel the songs?

The computer is connected to the headset through the magnetic adsorption data cable, and the computer displays a U disk around 5 seconds later you can download or delete the songs.

Basic Operations

BT MODE

- **Power on/off:** Press and hold "on/off" for 3s
- **SIRI:** Press and hold on "+" for 2s
- **Pause/play:** Short press "on/off"
- **Next:** Double Press "+"
- **Previous:** Double Press "-"
- **Answer/ Reject Call:** Short press "on/off"
- **Volume + /- Play:** Short press "+" or "-"

MP3 MODE

- Switch mode Double Press "on/off"
- Pause/play Short press "on/off"
- Volume+ Short press "+"
- Volume- Short press "-"
- Next /Previous Double Press "+" / "-"

LED Indicator

- **Blue and red light flashing:** Pending BT pairing
- **Blue light flashing slowly:** Pending for playing at BT mode
- **The red light on** Charging
- **The green light on:** Fully charged
- **Blue light flashing:** Data transfer mode
- **Green light flashing:** Pending to play at MP3 mode
- **Blue light breathing:** BT game low latency mode

Storage & maintenance

- Store the BT headphone in a cool and dry place, the working temperature is 0-45°C
- Please charge it before using it after a long time of storage.
- Do not put the headset in a higher or lower-temperature environment.
- Do not charge the headset in a moist environment.
- Do not use the headset during charging.

Note:

Wearing and removing the headset with both hands. Please adjust its position according to your comfort.

Troubleshooting

Can't switch to MP3 mode

Cannot switch to MP3 mode if the internal memory card has no songs.

No sound in MP3 mode

Please make sure to increase the volume in MP3 mode.

Not charging or unable to transfer data

Please wipe the charging port clean and try again.

For bathing and swimming

It is recommended that use the headphones no deeper than 1.5 meters under water. And do not use it underwater for longer than 30 minutes in a single use.

- **Model:** REERAY R6
- **Horn unit:** Bone conduction transducer
- **Impedance:** 2dB
- **BT version:** 5.3
- **Microphone sensitivity:** -42dB
- **Support:** HSP/HFP/A2DP/AVRCP
- **Decoding:** MP3/APE/FLAC
- **Connect distance:** 10m/33ft
- **Battery capacity:** 180mAh
- **Built-in memory:** 16G
- **Playback time:** Up to 10 hours @70% volume
- **Standby time:** About 240 hours


- **Charging time:** About 2 hours
- **Waterproof:** IP68
- **Charging voltage:** 5V
- **Input:** DC 5V/100mA

Warranty

We offer a 100% satisfaction guarantee. If you have any questions or concerns about our product, please feel free to email us at support@reeray.com.

Manufacturer: ReeRay Technology Ltd
 Address: RM 705,7/F FA YUEN BLDG,77 FA YUEN ST, KLN, HK Email: support@reeray.com.

Documents / Resources

<div>  </div> <div> Bone Conduction Headset </div> <div> USER MANUAL </div> <div> R6 </div>	<div> REERAY R6 Bone Conduction Headset [pdf] User Manual </div> <div> R6 Bone Conduction Headset, R6, Bone Conduction Headset, Conduction Headset, Headset </div>
--	--