

reolink
NVS8 8 Channel PoE NVR for
24 7 Reliable Recording



reolink NVS8 8 Channel PoE NVR for 24 7 Reliable Recording Owner's Manual

[Home](#) » [reolink](#) » reolink NVS8 8 Channel PoE NVR for 24 7 Reliable Recording Owner's Manual 

Contents

- [1 reolink NVS8 8 Channel PoE NVR for 24 7 Reliable Recording](#)
- [2 Centralize Your Security](#)
- [3 Gallery](#)
- [4 Dimension](#)
- [5 Privacy in Your Hands](#)
- [6 Best Companion](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)

reolink

reolink NVS8 8 Channel PoE NVR for 24 7 Reliable Recording





8-Channel

The NVR can connect up to 8 Reolink PoE/WiFi cameras.



Built-in 2TB HDD

Store videos locally on a pre-installed 2TB HDD (upgradable to 12TB).



24/7 Recording

Continuous recordings directly to your hard drive with expandable storage.

16MP

Support up to 16MP

Record up to 16MP ultra-clear videos on every channel.



All-Around Protection

Stand guard over every inch of your property with up to 8 cameras.



Centralized Security

Take full control of all cameras with centralized NVR management.



PoE

The plug-and-play setup saves you time and effort.



Remote Access

Easily check live feeds from anywhere via the Reolink App/Client.



Local Access

Access the live feeds offline via a monitor or an HD TV.



Centralize Your Security

Connect your Reolink cameras to the NVR for centralized management, all-around surveillance, and more. Everything is under your control.




24/7 Continuous Recording

Save days of your 24/7 footage securely and locally on a 2TB HDD (upgradable to 12TB). Never worry about data loss.

Your Personalized Security Solution

The 8-Channel NVR is compatible with all our IP cameras – up to 16MP PoE/WiFi cameras. Have fun customizing your own security system.

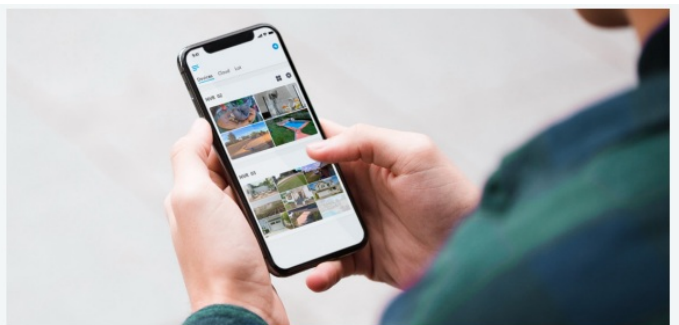

PoE – Easy Setup

Simply connect your cameras to the NVR with a network cable for both data & power transmission. No messy cables, ideal for DIY lovers.

Local and Remote Access & Control

Access the live streams of all cameras anywhere with the Reolink App/Client, or connect the NVR to a monitor for local monitoring.



Gallery




Model	NVS8	
Hardware	Hardware	N7MB01
Video/Audio Input	IP Video Input Audio Input	PoE IP Camera x 8 Cameras with built-in mic
Video/Audio Output	HDMI Output Resolution VGA Output Resolution Audio output	3840x2160, 1920x1080, 1280x1024, 1280x720, 1024x768 1920x1080, 1280x1024, 1280x720, 1024x768 1-Channel, RCA
Decoding	Video Format Live View / Playback Resolution Synchronous Playback	H.264, H.265 7680×2160, 4608×1728, 4512×2512, 4096×3072, 3840×2160, 2560×2560, 2560×1920, 2560×1440, 2048×1536, 2304×1296, 1080p, 720p Up to 4 channels
HDD	SATA External HDD Capacity	1 x SATA interface (1 x 2TB HDD included) 1 eSATA Interface for HDD Up to 12TB (max. 6TB capacity for each HDD)
External Interface	USB Interface Network Interface	2 x USB 2.0 1, RJ-45 10/100 Mbps self-adaptive Ethernet interface for LAN/ WAN 8, RJ-45 10/100 Mbps self-adaptive PoE Ethernet interface for IP camera
PoE	Max. Power Per Port Supported Standard	25W IEEE 802.3af/at
Network	Network Protocols Browsers Supported OS Supported Max. User Access	HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, SMTP, SSL/TLS, DNS, DDNS, NTP, FTP Edge, Firefox, Chrome, Safari PC: Windows, Mac OS; smartphone: iOS, Android 20 users (1 admin account & 19 user accounts); supports up to 12 simultaneous video streams (10 substreams & 2 mainstreams)
General	Power Supply Power Consumption Working Environment Dimensions Weight	DC 48V~53V <10W (Without HDD&PoE) Temperature: -10°C~+45°C (14°F~113°F); humidity: 10%~90% 260 x 41 x 230mm 1.4kg
Warranty	Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/

One App/Client for All Control

Stay connected to your home or business anytime, anywhere.


Dimension

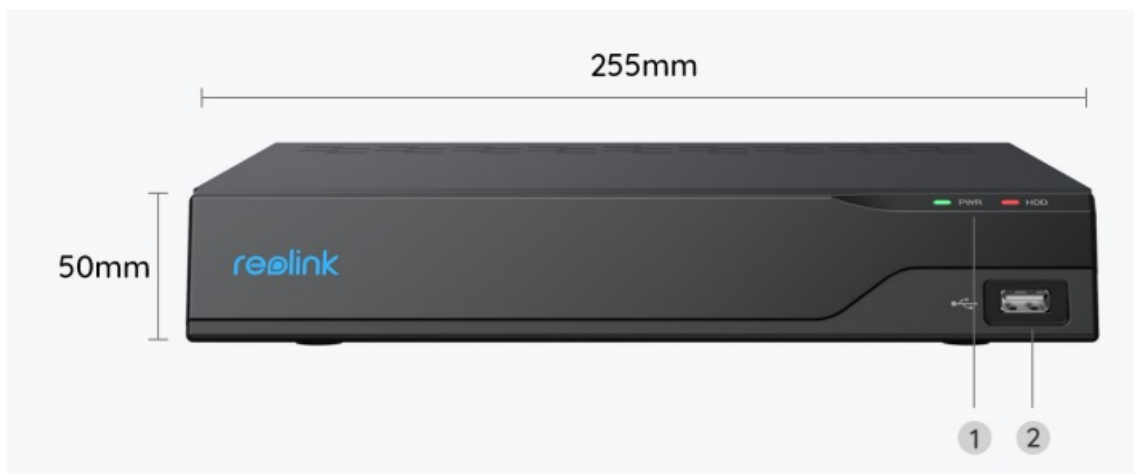

1. Power LED/HDD LED
2. USB Port


Privacy in Your Hands

We made it a priority to ensure that your privacy is protected and your data is for your eyes only.

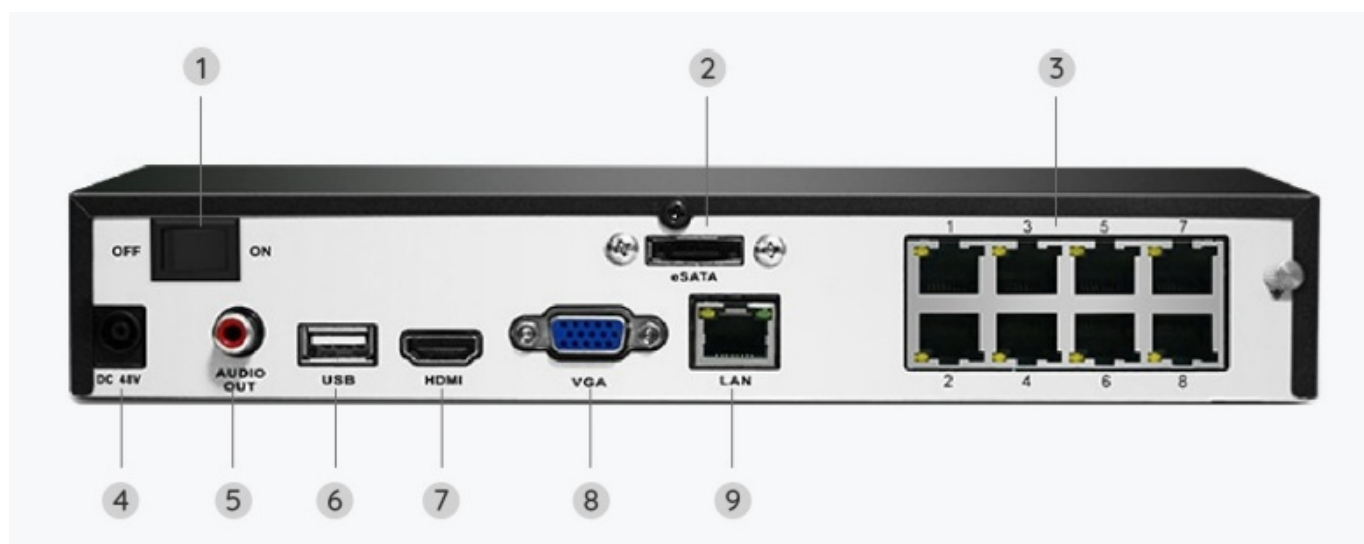

1. On/Off Switch
2. Power Input
3. HDMI Port
4. eSATA
5. Audio Out
6. VGA Port
7. RJ45
8. USB Port
9. Network

Best Companion

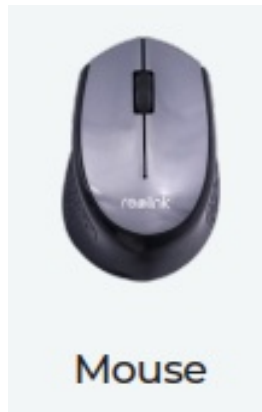

Download Free Reolink App & Client

Learn more: <https://reolink.com/software-and-manual/>

Terms and Privacy

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com. Keep out of reach of children.

Limited Warranty

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: <https://reolink.com/warranty-and-return/>

Documents / Resources

	<p>reolink NVS8 8 Channel PoE NVR for 24 7 Reliable Recording [pdf] Owner's Manual NVS8 8 Channel PoE NVR for 24 7 Reliable Recording, NVS8, 8 Channel PoE NVR for 24 7 Reliable Recording, NVR for 24 7 Reliable Recording, Reliable Recording</p>
--	---

References

- [Reolink Official: Security Cameras and Systems for Home & Business](#)
- [Reolink Support - Official Reolink Help Center](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.