



RoHS X10 Bluetooth Alarm Clock Speaker User Manual

[Home](#) » [RoHS](#) » RoHS X10 Bluetooth Alarm Clock Speaker User Manual 

Contents

[1 RoHS X10 Bluetooth Alarm Clock Speaker User Manual](#)

[2 IMPORTANT:](#)

[2.1 4. Operation instructions](#)[4.1. On and off setting](#)

[2.2 MODE SELECTIONS](#)

[2.3 4.2 Time setting](#)

[2.4 4.3 Screen Display Brightness Setting](#)

[2.5 4.4 Sleep Timer Setting](#)

[2.6 4.5.1 Alarm Setting](#)

[2.7 4.5.2 Alarm 2 Setting](#)

[2.8 4.5.3 Snooze Function](#)

[2.9 4.6 bluetooth function](#)

[2.10 4.6 FM Radio Setting](#)

[2.11 4.9 USB charging](#)

[3 Read More About This Manual & Download PDF:](#)

[4 Documents / Resources](#)

[5 Related Posts](#)

RoHS X10 Bluetooth Alarm Clock Speaker User Manual



IMPORTANT:

All safety and operating instructions should be read thoroughly before proceeding and please keep this handbook for future reference.

1. Features and Functions

X10 is a multi-functional Bluetooth electronic Alarm Clock Speaker

Functions as follows:


- Bluetooth wireless speaker
- Large screen Clock display
- Dual Alarm Clock function with adjustable Volume adjustable and Snooze
- 3.5mm headphone audio jack
- 2 USB ports for charging additional devices
- LED night light with adjustable brightness
- LED time display with adjustable brightness
- Displays Day of Week
- FM Radio

2. What's included

(Please carefully check the product and accessories in the package after purchase)

- ①X10 Main Unit ②Aux-in Cable
- ③Power Adaptor ④User manual
- ⑤Button Cell Battery

3. Home button and LED screen display

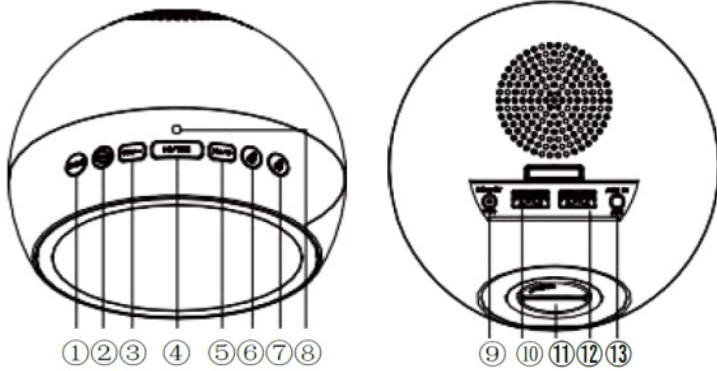

- ① On-off button and mode switching (Bluetooth, FM Radio, AUX)
- ② Adjust LED display brightness, Sleep timer function
- ③ Last song: Play last song and last Channel on the radio, decrease time, decrease volume
- ④ Pause, set time, set alarm time,



- ⑤ Next song: Play next song and next Channel on the radio, increase time, increase volume
- ⑥ Alarm 1: turn on/off Alarm 1, manually tune last radio channel
- ⑦ Alarm 2: turn on/off Alarm 2, manually tune next radio channel
- ⑧ Temperature sensor ⑨ DC5V power socket
- ⑩ USB charging
- USB charging
- Button cell battery bin.
- 3.5mm audio output and radio antenna
- LED night light
- Call MIC
- LED display.

4. Operation instructions

4.1. On and off setting

Step 1: Insert the button cell battery (included) into the battery compartment at the bottom of the clock

Step 2: Insert the power adaptor into the power outlet and the alarm clock will be on. (ONLY use the supplied power adaptor to operate this unit)


Note: Unplug the power adaptor will turn the alarm clock off. The button cell battery can only be used for maintaining the clock setting, but not for any operation.



MODE SELECTIONS


Short press the "MODE" button on the clock to switch among modes, the modes of Bluetooth/Radio/AUX. Long press to turn off the mode function.



4.2 Time setting



NOTE: You CAN'T set the time or alarms on the Radio Mode, so please select other modes before doing it



Step 1: Long press the " " button for 2 seconds to enter 12H/24H format selection. The display begins to flash


Step 2: Short press the "/=" or " " button to select 12H/24H time format



Step 3: Short press the " " button to confirm the 12/24 hour time format and enter hour setting mode. The display begins to flash


Step 4: Short press the "/=" or " " button to adjust hour

Step 5: Short press the "/=" or " " button to confirm hour and enter minute setting mode. The display begins to flash

Step 6: Short press the "/=" or " " button to adjust minute

Step 7: Short press the " " button to confirm minute and enter week setting mode. The display begins to flash

Step 8: Short press the "/=" or " " button to adjust week

Step 9: Short press the " " button to confirm week and finish time setting.


4.3 Screen Display Brightness Setting


Short press the "sleep" button to adjust the display brightness or to turn off the display. There is a 4-level brightness control for the display.

4.4 Sleep Timer Setting

4.4 Sleep Timer Setting


Step 1: Short press the "MODE" button to select among Bluetooth/Radio/ AUX mode

Step 2: Long press the " " button for 2 seconds to enter sleep timer setting



Step 3: Short press the " " button to select the timer duration (15~30~45~60~90min). The clock will automatically go back to time display in 10 seconds after selecting without any operation


4.5.1 Alarm Setting



NOTE: Alarm 1 is a long-term weekly alarm.


Step 1: Short press the " " button to turn on the alarm. The default alarm time will show on the screen



Step 2: Long press the "alarm 1" button to enter alarm time setting mode. Hour on the display begins to flash


Step 3 Press the "/=" or " " button to adjust hour



Step 4: Short press the " " button to confirm hour and enter minute setting mode. Minute on the display begins to flash

Step 5 Press the "/=" or " " button to adjust minute



Step 6: Short press the “” button to confirm minute and enter alarm ringtone selection mode

Step 7: Press the “/=” or “/+” button to choose ringtone between FM radio and traditional buzzer

Step 8: Short press the “” button to confirm ringtone and enter weekday setting mode

Step 9: Press the “/=” or “/+” button to adjust weekday

Step 10: Short press the “alarm 1” button to confirm weekday and enter alarm volume setting

Step 11: Press the “/=” or “/+” button to adjust alarm volume

Step 12: Short press the “ ” button to confirm and finish alarm 1 setting

4.5.2 Alarm 2 Setting

NOTE: Alarm 2 is a one-time alarm. It will turn off automatically after ringing once. Its setting is the same as alarm 1 except without step 9 and step 10. the confirm button from to

4.5.3 Snooze Function



Press any button (except alarm buttons) to turn on the snooze function when the alarm rings. The alarm will shut off and ring again in 5 minutes.

NOTE: The alarm will keep ringing continuously for 1 hour without pressing the corresponding alarm button to turn it off when it rings

4.6 bluetooth function

Step 1: Press the “MODE” button to select bluetooth mode. The will flash

Step 2: Pair your phone with the clock and it can be used as Bluetooth speaker to play music. The will be always on

Step 3: Short press the “ ” button to play previous song and “” button to play next song. The music will pause after short pressing the “” button

Step 4: Long press the “ ” or “ ” button to adjust volume

NOTE: Short press the “ ” button to start a hands-free Bluetooth wireless call when a phone call is coming if the phone is still connected

4.6 FM Radio Setting

Note: Please plug in the 3.5mm Aux-in Cable (included) to get better signal before searching radio channels. Can't adjust time or alarms on radio mode Automatically Searching for Channels

Step 1: Short press the “MODE” button to select the radio mode. The radio icon “ ” begins to flash

Step 2: Long press the “ ” button to enter automatic channel search mode (The search frequency is from 87.5Mhz to 108Mhz). It will go back to the first channel after finishing searching

Step 3: Short press the button to play previous channel and to play next channel. Short press the “ ” button to pause the radio Manually Searching for Channels

Long press the or the button to search for a channel manually while it's on FM radio mode. The alarm clock will play the last channel automatically in 5 seconds without any operation

4.7 Temperature & LED night light Setting Short press the “ ” button on the LED screen to adjust night light brightness (Low ~ Medium ~ High ~ Pulse ~ off).

Long press the “ ” button for 2 seconds on the LED screen to switch between Celsius and Fahrenheit. 4.8 AUX connection and playback Short press the “MODE” button until the AUX icon light on. Use the attached 3.5MM audio cable to the AUX jack at the back of the alarm clock and then connect the other end of the audio cable to

another device.

4.9 USB charging

This product provides 2 USB charging ports, which can charge 2 additional USB devices

Read More About This Manual & Download PDF:

Documents / Resources

<div>X10</div> <div>Bluetooth Alarm Clock Speaker</div>	<div>RoHS X10 Bluetooth Alarm Clock Speaker [pdf] User Manual</div> <div>X10 Bluetooth Alarm Clock Speaker</div>
---	--