



# SAMSERS B099T Foldable Bluetooth Keyboard User Manual

[Home](#) » [SAMSERS](#) » SAMERS B099T Foldable Bluetooth Keyboard User Manual 

**SAMSERS B099T Foldable Bluetooth  
Keyboard User Manual**

## Bluetooth Keyboard (B099T)

User Manual



### Compatible System

iOS / Android / Windows / Mac OS

**Note:** Please charge the keyboard and read the user manual carefully before you start using this product !

## Contents

- 1 Package Contents
- 2 Specifications
- 3 Overview
- 4 Keys and Functions
- 5 Keyboard Language Switching
- 6 Important
- 7 FCC Statement
- 8 Bluetooth 1&2&3 Pairing
- Instructions
- 9 Touchpad Function Introduction
- 10 Status Display LED
- 11 System Requirements
- 12 How to Charge it
- 13 Keyboard Maintenance
- 14 FAQ
- 15 Contact Us
- 16 Documents / Resources
- 17 Related Posts

## Package Contents

- 1\* Wireless Keyboard
- 1\* Type-C Charging Cable
- 1\* Storage Bag
- 1\* Phone Holder
- 1\* User Manual

## Specifications

Keyboard size: 34.3\*114.7\*10.9mm (Open)

Touchpad size: 60.5 \*101.5mm

Weight: 274g

Working distance: 10m

Lithium battery capacity: 180mAh


Charge time: 2-3 hours

Uninterrupted work time: 48 hours

Stand by time: 10 minutes

Awaken way: Arbitrarily key to awaken



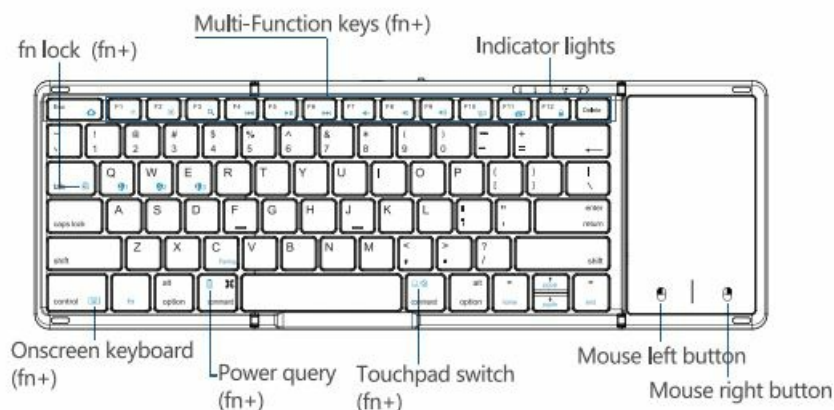













## Overview



## Keys and Functions

Function Keys	iOS	Android	Windows 10	Mac OS	Windows Mac OS
Way to use	Press directly	Press directly	Press directly	Press directly	Press fn +
	Home	Home or N/A	Web Browser	Home	esc
	Brightness -	Brightness -	Brightness -	Brightness -	F1
	Brightness +	Brightness +	Brightness +	Brightness +	F2
	Search	Search or N/A	Search	Search	F3
	Previous Track	Previous Track	Previous Track	Previous Track	F4
	Play/Pause	Play/Pause	Play/Pause	Play/Pause	F5
	Next Track	Next Track	Next Track	Next Track	F6
	Mute	Mute	Mute	Mute	F7
	Volume -	Volume -	Volume -	Volume -	F8
	Volume +	Volume +	Volume +	Volume +	F9
	Task browse window	Task browse window or N/A	Task browse window	Task browse window	F10
	Print Screen	Print Screen or N/A	Print Screen	Print Screen	F11
	Lock Screen	Lock Screen or N/A	Lock Screen	Lock Screen or N/A	F12

- Due to differences in device systems, some shortcut key functions may not be available, please refer to the actual use.
- If all the shortcut keys do not work, please check whether the fn lock function is turned on.

Special Keys	Descriptions
	The fn key is used in combination with other keys to access special features.
  	Press fn + this key to choose Bluetooth Channel 1. Press fn + this key to choose Bluetooth Channel 2. Press fn + this key to choose Bluetooth Channel 3.
	Press fn + C to let the keyboard enter pairing status.
	Press fn + this key to work as virtual keyboard. <b>Note:</b> this function work for iOS only.
	Press fn + this key to check the battery reminding. The Indicator flashes once for 25%, twice for 50%, 3 times for 75%, and 4 times for 100%.
	Press fn + this key to turn the touchpad function on or off.
  	Press 「Fn」 +  to work as page up. Press 「Fn」 +  to work as page down. Press 「Fn」 +  to work as home. Press 「Fn」 +  to work as end.
	Press fn + this key to lock or unlock the fn key. (Only for Esc - F12 key)

## Keyboard Language Switching

- iOS 8 or below: command + space
- iOS 9 or above: ctrl + space
- Android: ctrl + space / shift + space / ctrl + shift / others
- Windows: ctrl/command +Space / alt + shift / ctrl + shift

### **Note:**

1.Due to different system versions, the above way may not work in all android devices.

## Important

As this is a multilingual keyboard, set the language of the device to your desired language before use.

- **For iOS devices only:**

Settings > General > Keyboard > Keyboards > Add new keyboard  
> Select desired language

- **For Samsung Android devices only:**

Settings > Controls > Language and input > Samsung Keyboard  
> Select input languages > Select desired language

- **For Android devices only:**

Settings > Language & input > Physical Keyboard > Set up keyboard  
layouts > Select desired language

- **For Windows devices only:**

Control Panel > Clock, Language and Region > Select desired language

## **FCC Statement**


Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

### **Bluetooth 1&2&3 Pairing Instructions**

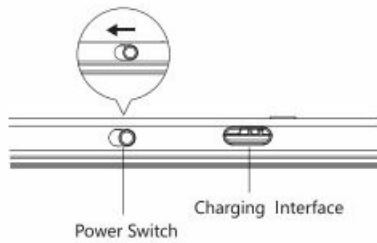









1. Turn on the power switch located on the side of the keyboard, The power indicator lights up in blue and then goes out.
2. Press fn + B1 / B2 / B3 to select Bluetooth 1 channel or Bluetooth 2 channel or Bluetooth 3 channel.
3. Press fn + Pairing to make the keyboard enter the pairing state; the Bluetooth indicator light starts to flash blue.
4. Turn on the Bluetooth settings on the device to enter search/pairing state.
5. Find "Bluetooth 5.1 Keyboard" and click it. After the connection is successful, you can use the keyboard.

#### NOTE:

1. If multiple devices are used at the same time, connect devices to different Bluetooth channel first, then press Fn+B1/B2/B3 to switch between them freely.
2. If you want to change the device connected to the Bluetooth1 / Bluetooth 2 / Bluetooth 3 channel, just follow the above connection method to re-pair and connect to the Bluetooth1 / Bluetooth 2 / Bluetooth 3 channel.
3. Auto re-connect function: when you turn on the keyboard, it will connect with the last-used device automatically. (After the connection, don't press the connect button again, or it will disconnect and you have to reconnect it.)
4. If the connection fails, please delete all the pairing records from your device; turn off your device Bluetooth function and turn it on again and then follow the above instructions again.



## Touchpad Function Introduction

Touch Gesture	iOS (higher 13.4)	Android	Windows10	Mac OS
 (One-finger click)	Mouse Left	Mouse Left	Mouse Left	Mouse Left
 (Two-finger slide)	Mouse Wheel	Mouse Wheel	Mouse Wheel	Mouse Wheel
 (Two-finger stretch)	Web Page Zoom	N/A	Zoom	N/A
 (Three-finger click)	Main Screen	N/A	Search	N/A
 (Three-finger slid up)	Open/hide Window or N/A	N/A	Open Task Browser	N/A
 (Three-finger slid down)	Open All Active Windows	N/A	Back to Desktop	N/A
 (Three-finger slid)	Switch Active Window	N/A	Switch Active Window	N/A
 (Four-finger click)	Screenshot	N/A	Open Action Center	N/A

- Touch gestures may vary depending on the system version or device type.
- if the touchpad doesn't work in iOS13.4 or higher, please make sure you have it enabled. Open "Settings" Accessibility Touch Assistive Touch on and you can enable the touchpad function.

## Status Display LED



1. Bluetooth indicator ①②③: Displays blue and then goes out when switching channels; flashes blue when it enters the pairing state.
2. Caps lock indicator: Displays blue when caps is locked.  
fn lock indicator: Displays green when the fn key is locked.
3. Power Indicator: Displays blue when turned on; stay in green when charging, and goes off when fully charged; flash red quickly when low power.

**REMARK:** In order to prolong the life span of the battery, when you do not use the keyboard for a long time, please switch off the power.

## System Requirements

- iOS 6.0 and above
- Mac OS X v10.6 to Mac OS X v10.12 and above
- Windows XP / Vista / 7 / 8 / 10 , PC computer with a Bluetooth host
- Android 3.0 and above with Bluetooth HID profile (Smartphones and Tablets)
- **This keyboard is not compatible with Samsung Smart TV , Xbox and Nokia phones.**

## How to Charge it

1. Use the included USB cable for charging. Connect one end to a USB charger, and the other to the keyboard. **(USB charger is not included)**
2. In charging, the power indicator will turn green. Generally, it takes approximately 2-3 hours for a full charge. **(Output: DC 5V / 1A or 2A)**

## Keyboard Maintenance

1. Please keep the keyboard away from liquid or humid environment, saunas, swimming pool, steam room and don't let the keyboard get wet in the rain.
2. Please don't expose the keyboard at too high or too low temperature condition.
3. Please don't put keyboard under sun for a long time.
4. Please don't put keyboard close to the flame, such as cooking stoves, candles or fireplace.
5. Avoid sharp objects scratching products, timely to recharge products to ensure the normal use.

### **Q: Fail to connect.**

#### **Step 1. Before to connect, please set as below.**

- \* Charge Samsers Bluetooth keyboard for 30 minutes.
- \* On your device, delete/remove/forget the previous connection record with "Bluetooth 5.1 Keyboard".
- \* On your device, turn Bluetooth off, and turn Bluetooth on again.
- \* Make sure that your Samsers device and your device are within close proximity of each other.

#### **Step 2. Follow the Pairing Instruction to connect it again.**

### **Q: My Samsers Bluetooth 5.1 keyboard frequently gets disconnected or laggy.**

1. Restart your Bluetooth product.
2. Charge Samsers Bluetooth keyboard for 30 minutes. Low battery power can adversely affect connectivity and overall functionality.
3. Make sure that your Samsers Bluetooth keyboard and computer are within close proximity of each other.
4. Do not use on metal surfaces.  
Try moving away from:
  - \* Any device that could emit wireless waves: Microwave, cordless phone, baby monitor, wireless speaker, garage door opener, WiFi router
  - \* Computer power supplies
  - \* Metal or metal wiring in the wall
5. Make sure your operating system (OS) is up to date.
6. Check if there are any updates running in the background that may cause the delay.
7. Try on a different computer/smartphone/tablet.

If the problem still persists, you will need to follow specific steps based on your device OS (Windows/Mac OS). Please email us.

### **More questions about using under Android devices.**

Android operating system is still not unified, and different manufacturer make different rule. For standard keyboard, because of rule change, the standard function may not work any more. If you are using under Android device and suffering some problems, please contact us.

## **Contact Us**

If you have any use problems with our keyboard, please do not hesitate to contact us! Please rest assured that we will definitely help you solve them!

Please contact us for a 24-month worry-free warranty: [Samsers@126.com](mailto:Samsers@126.com)

## **Documents / Resources**



**[SAMERS B099T Foldable Bluetooth Keyboard](#)** [pdf] User Manual  
B099T, 2AFW2-B099T, 2AFW2B099T, B099T Foldable Bluetooth Keyboard, Foldable Bluetooth Keyboard, Bluetooth Keyboard, Keyboard