



savio TEMPEST X2 Mechanical Keyboard User Manual

[Home](#) » [Savio](#) » savio TEMPEST X2 Mechanical Keyboard User Manual 

Contents

- 1 [savio TEMPEST X2 Mechanical Keyboard](#)
- 2 [Product Information](#)
- 3 [Specifications](#)
- 4 [Product Usage Instructions](#)
- 5 [Keyboard's main features](#)
- 6 [Multimedia activation key shortcuts](#)
- 7 [Backlight mode](#)
- 8 [Setting the user mode](#)
- 9 [Documents / Resources](#)
 - 9.1 [References](#)
- 10 [Related Posts](#)



savio TEMPEST X2 Mechanical Keyboard



Product Information

Specifications

- Model: TEMPEST X2
- Manufacturer: Savio
- Keyboard Type: Mechanical
- Backlight Modes: 18
- Customizable Lighting: Yes
- Special Features: Multimedia keys, User mode settings, Windows key blocking
- Keyboard layout: US (87 keys)
- Interface: USB
- Keycaps: ABS
- Switches: OUTEMU Red / Brown / Blue (depending on the model) switch are dimensions: 3550 * 27 * 338mm
- Keyboard weight: 560 ÷ 20 g
- Software: Yes
- N- key rollover & Anti-ghosting: Full
- Macro support: Yes
- Cable length: 1.5 m
- Compatibility: Windows XP, Vista, Win 7 / 8 / 10 / 11, Linux, macOS, Android
- Package content: Mechanical keyboard, manual

Product Usage Instructions

Device Installation:

1. Connect the keyboard to a USB-A port on your computer.
2. The operating system will automatically detect the keyboard and install drivers.
3. The keyboard is now ready to use.

Software Installation:

To access full configuration options:

1. Download and install the dedicated software from the manufacturer's website.
2. After installation, double click on the software icon on the desktop to open the settings interface.

Multimedia Activation Key Shortcuts:

Use the following key combinations for multimedia functions:

- Music: Fn + F1
- Play / Pause: Fn + F2
- Decrease volume: Fn + F3
- Next track: Fn + F4

- Increase volume: Fn + F5
- Email: Fn + F6

Backlight Control:

To turn on the backlight, press Fn + Arrow Up combination four times. To change colors and intensity, use specific key combinations as mentioned in the manual.

Windows Key Blocking:

To block/unblock the Windows key, press Fn + Windows key. The illuminated Windows key indicates if it's blocked or unblocked.

User Mode Settings:

1. To customize backlight for specific keys, press Fn + ~ twice to enter lighting customization mode.
2. Select keys to be backlit and change colors using key presses.
3. Press Fn + ~ to save customized lighting combination and exit customization mode.
4. To activate saved user mode settings, press Fn + ~ while using another backlight mode.

Changing WASD to Arrows:

To switch functionality of WASD keys to arrows, press Fn + W. Repeat the same key combination to revert to default settings.

Keyboard Default Settings:

To restart the keyboard, press Fn + Esc for 5 seconds.

Frequently Asked Questions (FAQ)

1. Q: How can I customize the backlight colors for specific keys?

A: To customize backlight colors for individual keys, follow the instructions under 'User Mode Settings' in the manual.

2. Q: Can I block the Windows key on the keyboard?

A: Yes, you can block/unblock the Windows key by pressing Fn + Windows key as mentioned in the manual.

3. Q: How do I switch functionality of WASD keys to arrows?

A: To switch functionality of WASD keys to arrows, press Fn + W. To revert to default settings, press the same key combination again.

Thank you for choosing Savio product!



If our product meets your expectations, share your opinion with other people on the portal ceneo.pl, social media or on the website of the store where you made the purchase. If you want to show our device on SAVIO Facebook Page, we will be very pleased.



If there is something that we could improve on our products, please write to us at support@savio.pl. Thanks to your feedback, we will be able to better adapt the product to your expectations. Before starting the use of purchased device it is recommended to read the whole manual.

Keyboard's main features

- OUTEMU Red / Brown / Blue (depending on a model).
- RGB backlight with 18 modes to choose from.
- Switch lifespan: 50 000 000 keystrokes.
- Keys are made with 'double injection' technology. It prevents wearing off the keys while using.
- N-key rollover & Anti-ghosting – a feature enabling pressing many keys at the same time.
- Functional balance and rubberized keyboard feet preventing unnecessary movement while using.
- Dedicated software allows full backlighting configuration and creating macros.

Package contents:

- Mechanical keyboard
- User manual

Device installation:

Connect the keyboard to USB-A port in your computer. Operating system will automatically detect the keyboard and install drivers.

























The keyboard is ready to use.

Software installation:


To get full configuration access you have to download and install dedicated software from our website:


www.savio.pl/download. After the download, double click on the icon and follow the installation steps. After the successful installation, you will see the software icon on the desktop. Double click on the icon to open the settings interface.

Multimedia activation key shortcuts












 + 	Music	 + 	Play / Pause
 + 	Decrease volume	 + 	Next track
 + 	Increase volume	 + 	E-mail
 + 	Mute	 + 	Internet browser
 + 	Stop	 + 	Lock keyboard
 + 	Previous track	 + 	Calculator

Backlight mode


The keyboard features 18 backlight modes. To activate the backlight you need to press 

Each time you press FN +  the backlight color will change (this functionality works with some modes).


The keyboard also features changing the backlight intensity. Press FN + Arrow Up / Down to increase / decrease light intensity. Press FN + Arrow Left / Right to decrease / increase effects speed.

	Change backlight mode (18 modes)	 + 	Decrease back- light intensity
 + 	Change back- light color	 + 	Decrease effect speed
 + 	Increase back- light intensity	 + 	Increase effect speed

To turn of the backlight, press FN + Arrow Down combination 4 times (counting from maximum brightness level).




To turn on the backlight, press FN + Arrow Up combination 4 times (counting from no backlight).

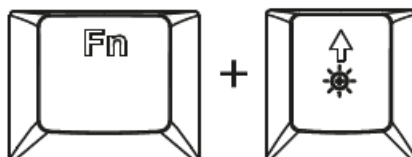


Blocking the Windows key:

To block the Windows key, press FN + Windows. When the Windows key lights up. it means that the kev is blocked. To unblock the Windows key. press FN + Windows once again. The Windows key will no longer light up.

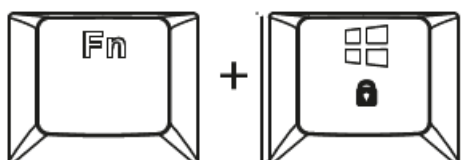


Setting the user mode


User mode enables the user to set the backlight for chosen keys.
Press FN + ~ twice to enter the lighting customization mode.

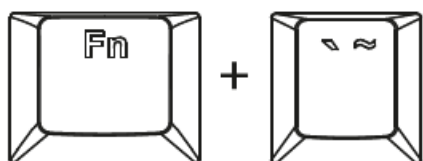

Choose and press keys that should be backlit. Each press of key change the color that will be displayed for individual key. Press FN + ~ again to save the customized lighting combination and exit the customizaition.

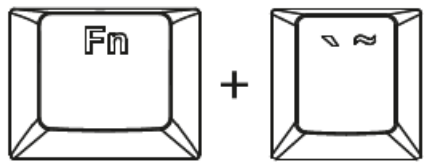


To enter the saved user mode settings while using another backlight mode, press FN + ~.

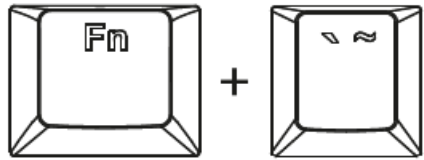


Changing WASD to arrows:

The keyboard enables changing the functionality of WASD keys to arrows. To activate this mode, press FN + W. To go back to default settings, press the same key combination.

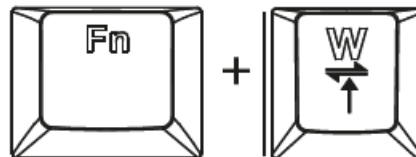

Keyboard default settings:

To restart the keyboard, press FN + Esc for 5 seconds.

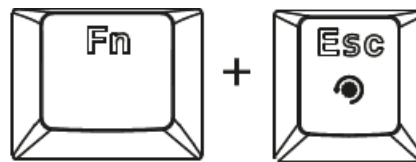

Safety conditions:

- Use the product in accordance with its intended use, as improper use may damage the product.
- Do not expose the device to moisture, heat or sunlight, do not use the product in a dusty environment.
- The device should be cleaned only with a dry cloth.
- Independent repairs and modification result automatic loss of the warranty.
- Hitting or dropping may damage the product.

Warranty:

The warranty covers a period of 24 months. Independent repairs and modifications result in automatic loss of the warranty. Warranty card is available for download on our website: www.savio.pl/en/service

Information for customers and contractors and communication regarding complaints:

Pursuant to Article 13 section 1 and 2 of the General Data Protection Regulation (EU) 2016/679 of the European Parliament and of the Council of 27 April 2016 (hereinafter referred to as GDPR), please be advised that Elmak Sp. z o.o., with its registered seat at Al. Zotnierz | Armii WP 20B; 35-301 Rzeszów becomes the Administrator of your personal data. The Specialist for General Data Protection (SODO) can be contacted in writing to: SODO, Elmak Sp. z o.o., Al. Zonierzy | Armii WP 20B; 35-301 Rzeszow, via e-mail address: sodo@elmak.pl, and by phone at +48 (17) 854 98 14. Your personal data will be processed in order to perform the contract, in accordance with Article 6(1) (b) of the aforementioned regulation, to the extent resulting from tax laws and financial regulations.

Recipients of your personal data include entities authorized by legal regulations to obtain personal data as well as processing entities providing services to Elmak Sp. z o.o. Your personal data will be stored on the basis of Administrator's legitimate interest. You have the right to access your data, and the right to rectify, delete or limit processing of your data. You have the right to lodge a complaint to the supervisory body if you believe that the processing violates the GDPR. The provision of personal data is voluntary, however, a failure to provide such data may result in a refusal to conclude or in termination of a contract. Your personal data will not be subjected to automated decision making, including profiling referred to in Article 22 section 1 and 4 of the GDPR of April 27, 2016.

Information of the utilization of electrical and electronic equipment




■ This symbol indicates that electrical appliances should not be discarded with other household waste. Used equipment should be handed over to a local collection point for this type of waste or to a recycling center. Please contact your local authorities for information about disposal methods available in your area. Waste electrical equipment may contain hazardous substances (e.g. mercury, lead, cadmium, chromium, phthalates) which can get into air, soil and groundwater when leaking from used appliances. Environmental contribution to environmental protection by proper waste collection. In such way, hazardous substances from the equipment are neutralized and valuable secondary raw materials are reused for production of new equipment.

PRODUCER:

Elmak Sp. z o.o.
al. Złotnierzy | Armii Wojska Polskiego 20B
35-301 Rzeszów, Polska
www.savio.pl

Documents / Resources

	savio TEMPEST X2 Mechanical Keyboard [pdf] User Manual TEMPEST X2 Mechanical Keyboard, TEMPEST X2, Mechanical Keyboard, Keyboard
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.