



SCT RCM-CQC 2-Gang Mounting Solution for Cisco Quad Camera Instruction Manual

[Home](#) » [SCT](#) » SCT RCM-CQC 2-Gang Mounting Solution for Cisco Quad Camera Instruction Manual 

Contents

- [1 SCT RCM-CQC 2-Gang Mounting Solution for Cisco Quad Camera](#)
- [2 Product Information](#)
- [3 Included Parts](#)
- [4 Parts Not Included](#)
- [5 Product Usage Instructions](#)
- [6 INCLUDED PART LIST](#)
- [7 ASSEMBLY INSTRUCTIONS](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)



SCT RCM-CQC 2-Gang Mounting Solution for Cisco Quad Camera



Product Information

The RCM-CQC™ is a 2-Gang Mounting Solution designed specifically for the Cisco Quad Camera. It allows for easy installation and mounting of the camera in a secure and convenient manner.

Included Parts

- No. 1 Camera Plate, 813-1109 (Qty 1)
- No. 2 RCM Wall Plate, 813-1109 (Qty 1)
- No. 3 6-32×1/2, Slotted Screw, White, 860-0014 (Qty 4)
- No. 4 6-32×3/8, Pan Head Torx Screw, 860-0031 (Qty 2)

Parts Not Included

- No. 5 2-Gang Electrical Box (Qty 1)
- No. 6 Cisco Quad Camera (Qty 1)

Product Usage Instructions

1. Attach the RCM Wall Plate (No. 2) to the 2-gang electrical box (No. 5) using the provided 6-32×1/2 white slotted screws (No. 3). You will need to use four of these screws.
2. Attach the Camera Plate (No. 1) to the RCM Wall Plate using the provided 6-32×3/8 pan head Torx screws (No. 4). You will need to use two of these screws.
3. Finally, attach the Cisco Quad Camera (No. 6) to the Camera Plate.

For any further assistance or inquiries, please contact Sound Control Technologies, Inc. at 203-854-5701 or visit their website at www.soundcontrol.net.


RCM-CQC™ 2-Gang Mounting Solution for Cisco Quad Camera

INCLUDED PART LIST


- No. 1 Camera Plate, 813-1109 (Qty 1)
- No. 2 RCM Wall Plate, 813-1109 (Qty 1)
- No. 3 6-32×1/2", Slotted Screw, White, 860-0014 (Qty 4)
- No. 4 6-32×3/8", Pan Head Torx Screw, 860-0031 (Qty 2) Pan Head Torx Screw. 860-0031 (Qty 2)
- No. 5 2-Gang Electrical Box (Qty 1)
- No. 6 Cisco Quad Camera (Qty 1)

ASSEMBLY INSTRUCTIONS


STEP 1: Attach RCM Wall Plate (No. 2, Qty 1) to 2-gang electrical box (No. 5, Qty 1) using 6-32×1/2" white slotted screws (No. 3, Qty 4).

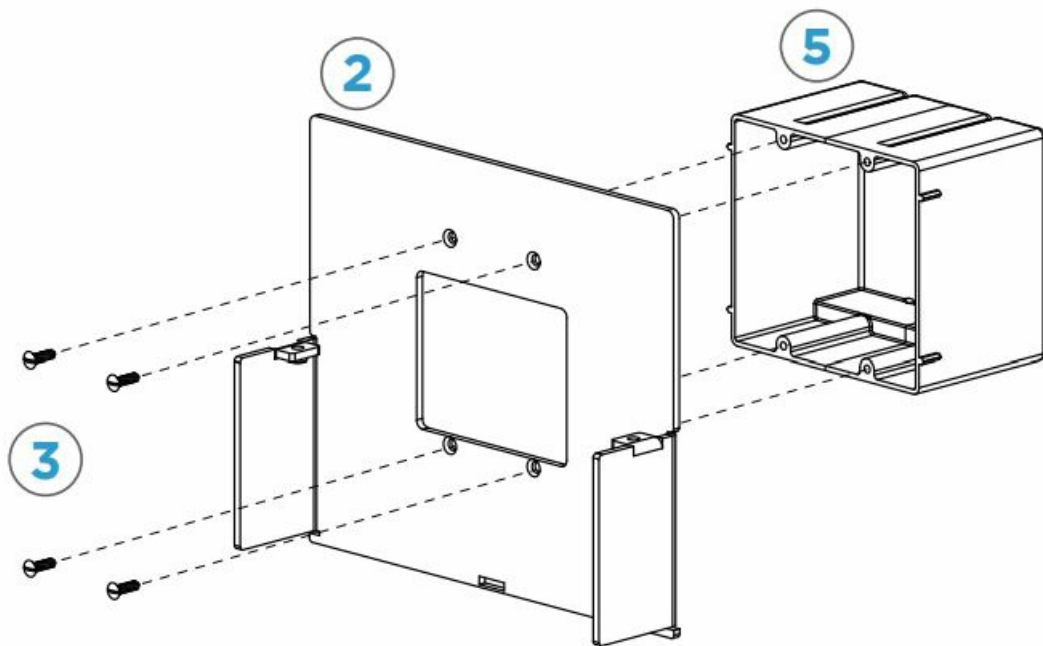

STEP 2: Attach Camera Plate (No. 1, Qty 1) to RCM Wall Plate using 6-32×3/8" pan head Torx screws (No. 4. Qty 2).

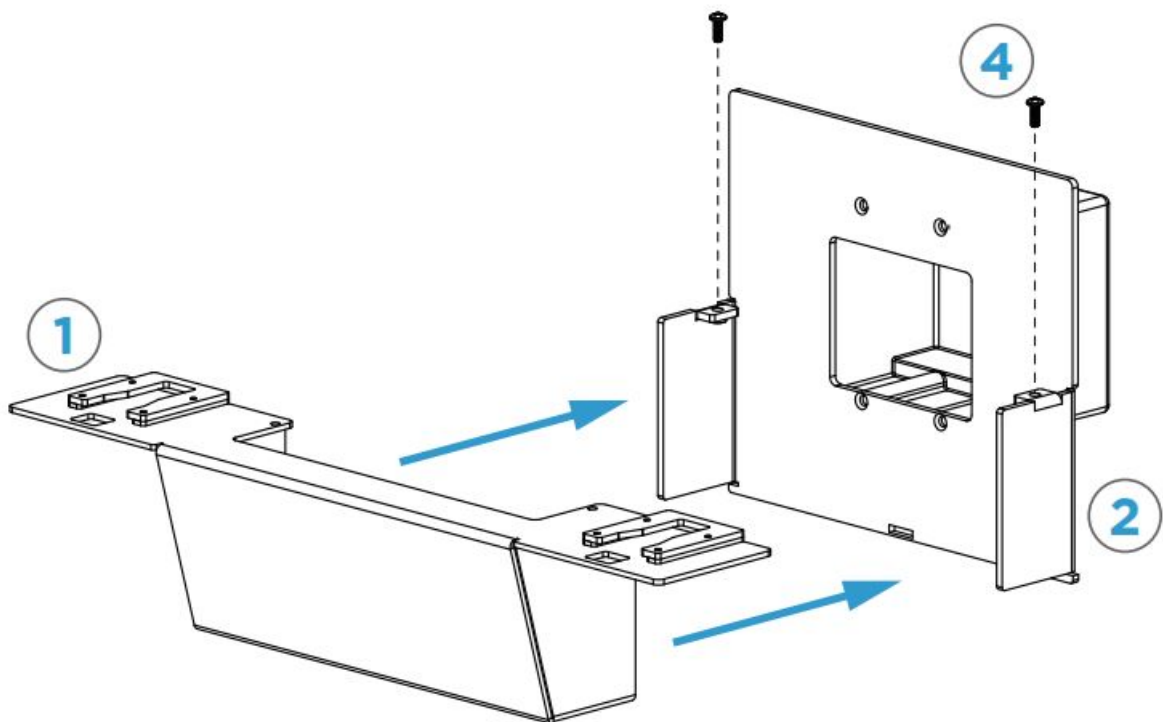


STEP 3: Attached Cisco QuadCam (No. 6, Qty 1) to Camera Plate.

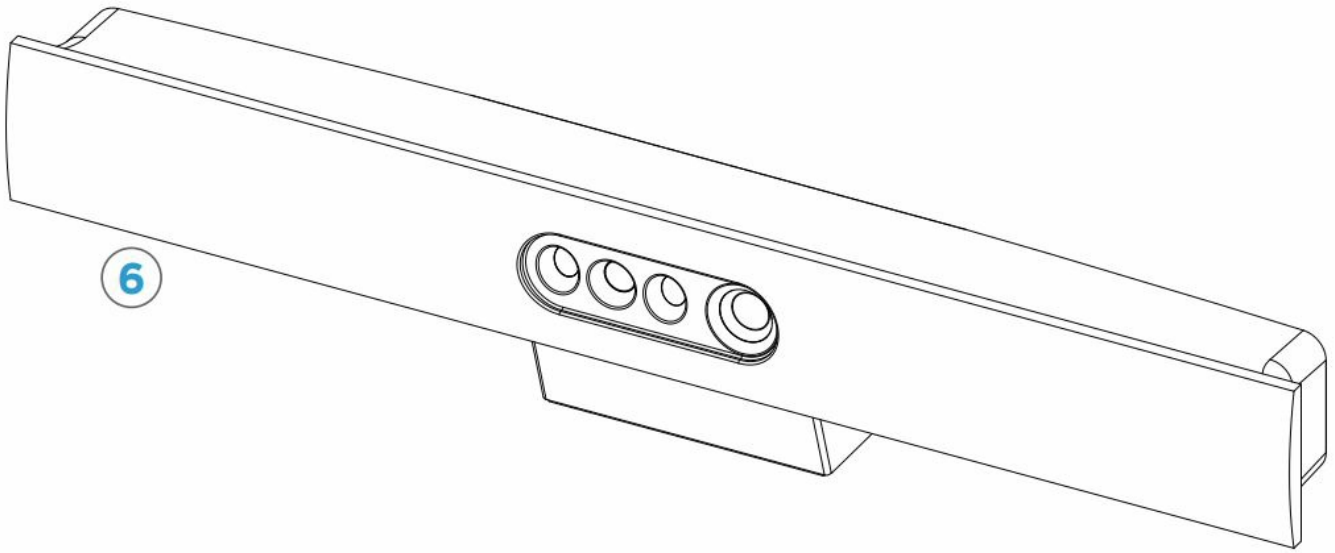

SOUND CONTROL TECHNOLOGIES, INC. | 203-854-5701 | WWW.SOUNDCONTROL.NET

Documents / Resources

	<p>SCT RCM-CQC 2-Gang Mounting Solution for Cisco Quad Camera [pdf] Instruction Manual RCM-CQC, RCM-CQC 2-Gang Mounting Solution for Cisco Quad Camera, 2-Gang Mounting Solution for Cisco Quad Camera, Mounting Solution for Cisco Quad Camera, Cisco Quad Camera, Camera</p>
--	--

References

- [SCT Home - Sound Control Technologies](#)