

# Secure Com V-4408D Eight Channel NVR User Guide

Home » Secure Com » Secure Com V-4408D Eight Channel NVR User Guide 1



# V-4408D EIGHT-CHANNEL NVR User Guide



#### **DESCRIPTION**

#### Overview

The SecureCom™ Video V-4408D Eight-Channel NVR gives users a more powerful security tool to monitor cameras connected to their systems.

#### Storage

The V-4408D provides 2 TB of storage for continuous local recording.


# Compatibility

The NVR supports all ONVIF 2.4-compatible cameras and can be used with the Virtual Keypad<sup>™</sup> App or VirtualKeypad.com.

The V-4408D can also be monitored from any display with an HDMI input or with an Apple TV (Virtual Keypad™ App required).

#### **QUICK SETTINGS TOOLBAR**

The availability of the following options depends on the compatibility of the camera connected to the NVR. The Quick Settings Toolbar displays in Live View when you select a channel.

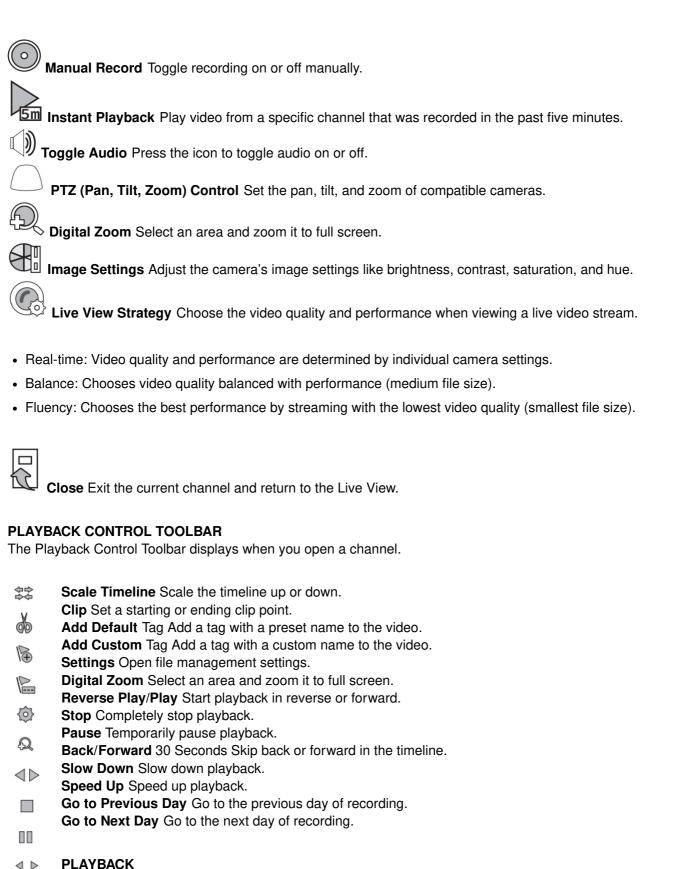

# 305 305

#### Instant

 $\triangleleft \triangleleft$ Play video recorded in the past five minutes. Channel switch is supported. Select a channel, then go to

the Quick Settings Toolbar and select Instant Playback.  $\langle\!\langle$ 

#### $\gg$ Normal

#### By Channel

In Live View, right-click a channel and select Playback. In multi-camera view, the video from the uppermost left camera plays first.

#### By Time

Play video files recorded during a specified timeframe. Multi-channel simultaneous playback and channel switch

are supported.

- 1. Right-click a channel and select Playback.
- 2. Select a camera from the device list.
- 3. Double-click dates on the calendar to select them.
- 4. Use the playback controls to watch the video.

#### **EXPORT VIDEO**

## **Manage Backup Storage Devices**

When exporting videos, the current device is shown in **Device Name**. To create a new folder on the device, select New Folder. To format the storage device and delete all the data it contains, select Format.

#### **Quick Export**

- 1. Right-click the screen and select Menu.
- 2. Select Export.
- 3. Select the videos that you want to export, then press Quick Export.
- 4. Select the format of the videos to be exported, then select the device where you want to save them.
- 5. Press Export. When the videos have been exported, the dialog displays Export finished. Press OK to return to the export window.

### **Back-Up with Search**

- 1. Right-click the screen and select Menu.
- 2. Select Export.
- 3. Open either the Normal or Event tab.
- 4. Choose your parameters, then press **Search.**
- 5. Select the storage device where you want to save the videos.
- 6. Select the videos that you want to back up, then press Export.

#### **Back-Up Video Clips or Snapshots**

- 1. Right-click a channel and select Playback.
- 2. Create a video clip or capture a snapshot.
  - Create a Clip: Press Clip, play the video, then press Clip again to finis
  - Create a Snapshot: Press Snapshot.
- 3. Click Settings.
- 4. In Video Clips, select the clips that you want to export, then press Export.

INTRUSION • FIRE • ACCESS • NETWORKS 2500 North Partnership Boulevard Springfield, Missouri 65803-8877 800.641.4282 | DMP.com

Designed, engineered, and manufactured in Springfield, MO using the U.S. and global components. LT-1877 21041 © 2021

#### **Contents**

- 1 Documents / Resources
- 1.1 References
- **2 Related Posts**

# **Documents / Resources**



<u>Secure Com V-4408D Eight Channel NVR</u> [pdf] User Guide V-4408D, Eight Channel NVR

# References

- <u>DMP.com | Welcome to Digital Monitoring Products</u>
- Virtual Keypad

Manuals+,