




setty mini Bluetooth speaker User Manual

[Home](#) » [setty](#) » setty mini Bluetooth speaker User Manual 

setty.

MANUAL

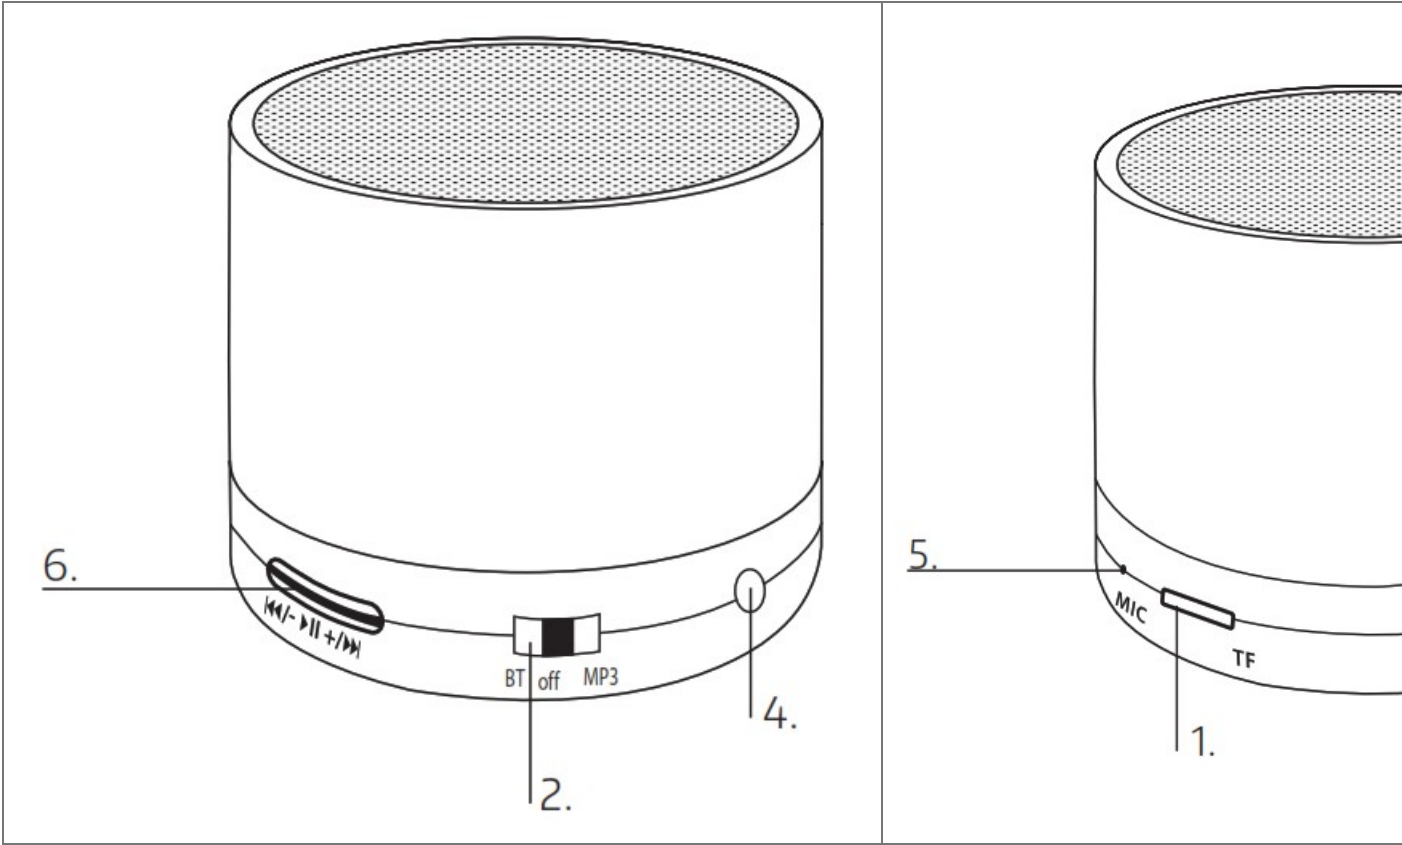

Thank you for buying mini Bluetooth speaker Setty Junior.

Before using the product, please read the manual carefully to learn more about the functions and operation way. Do not modify or repair Junior. Doing so may result user's injury, complete breakdown of Junior, or losing warranty. We hope that you will enjoy the product by Setty.

Contents

- 1 In the set
- 2 Description
- 3 Specification
- 4 Pairing
- 5 Paring with computer/mobile phone
- 6 Compatibility
- 7 Available modes
- 8 Troubleshooting
- 9 Playing MP3 files from a microSD card
- 10 Audio input modes
- 11 Changing the volume
- 12 Music playing via Bluetooth
- 13 Answering/rejecting calls
- 14 Last number redialing
- 15 Safety
- 16 Additional information
- 17 Markings
- 18 Documents / Resources
 - 18.1 References
- 19 Related Posts

In the set

- mini Bluetooth speaker Junior
- Mini USB cable with integrated 3,5 mm audio cable
- user manual

Description

1. microSD card slot
2. power switch: MP3 on/off/Bluetooth on
3. mini USB input: charging port, audio input
4. LED indicator
5. microphone: used for calls under Bluetooth mode
6. play/stop, volume up/down

Specification

Bluetooth version: 2,1
Loudspeaker: 45 mm, 4 Ω , 3 W
Signal-to-noise: >/95 dB
Distortion: </0,5%
Frequency range: 280 Hz – 16 kHz
Operation range: up to 10 meters
Battery: 300 mAh

Music/talking time: approx. 4 hours
Dimensions: 60 x 60 x 50 mm
Weight: 230 g
Capacity of battery: 300 mAh, 3,7 V, Li-Ion
Music/talking time: up to 4 hours at 70% volume
Charging standard: DC 5 V
Charging time: 1,5 – 2 hours

Transmission frequency	Maximum radiated power
2402-2480MHz	-2,1dBm(EIRP)

Pairing

Turn on the speaker from off position to Bt. The speaker will enter the pairing mode automatically.

Pairing with computer/mobile phone

Turn the speaker into pairing mode. Find the speaker ID name: Junior (some phones or different devices need to input PIN „0000” as a password) on the list of available devices and pair both devices.

Compatibility

Speaker is compatible with all devices using Bluetooth 2,1 or later.

Available modes

- MicroSD card player
- music player with audio input
- Bluetooth speaker
- Bluetooth handsfree kit

Troubleshooting

1. When the speaker and mobile phone can't be paired, delete the speaker's name from the mobile phone list and try to pair the devices again.
2. The sound performance could be disrupted if devices are under low signal environment or when the batteries of both devices are low.

Playing MP3 files from a microSD card

1. Insert the microSD card into the reader.
2. Slide the switch to the „MP3” position.
3. Speaker phone turns on and starts playing the first song from the card automatically.
To stop the playback, press the „pause” button. Resume by pressing the „pause” button again.
To switch to the next song, move the control slider to the right „next song”.
To switch to the previous song, move the control slider to the left „previous song”.

Audio input modes

- Connect your audio source to the speaker using the mini USB cable included in the kit.
- Slide the switch into the „MP3” position. Music starts playing from the memory card (if memory card is inserted in the speaker) automatically.
- Press and hold the „music” button. The speaker has entered audio input mode.

Changing the volume

- To increase the volume, press the control slider to the right and hold the „volume up”. Release the control slider when the volume obtains desired value.
- To decrease the volume, press the control slider to the left and hold the „volume down” Release the control slider when the volume obtains desired value.

Music playing via Bluetooth

After connecting the device with the speaker, run the music application and play the music. Audio will be played from the speaker. By using the control slider on the speaker allow you to switch between songs, stop, resume playback and adjust the volume.

Answering/rejecting calls

In case of pairing the speaker with your phone, you can carry on a conversation in hands-free mode. When receiving a voice call, press the „answer call” button on the speaker. The device will go into the speaker phone mode. In order to end the call, press the „answer call” button again. To reject a call, double click the „answer all” button.

Last number redialing

When the speaker is connected with your phone, double-click the „answer call”. The phone using the hands-free mode will connect to the last dialed number.

Note: The speaker has to be paired with the phone.

Safety

- Please read and retain these instructions.
- Do not remove the cover of the device. There are no components that can be repaired by the user. All repairs should be done by a service technician.
- Protect your device from contact with water or moisture to avoid electrical shock.
- The battery should not be exposed to direct sunlight, fire, or other heat sources.
- Use only original parts and accessories supplied by the manufacturer.

Additional information

- Long-term listening to loud music may lead to hearing impairment and health problems.
- When listening to a music and driving, pay special attention to the surrounding.

TelForceOne S.A. declares that the product is compatible with requirements and other relevant provisions of the 2014/53/UE directive. You can download the declaration of product on the website <https://manual.setty.pl>

Markings



Electrical and electronic devices may not be disposed of with domestic waste. By recycling, reusing the materials, or other forms of utilising old devices, you are making an important contribution to protect our environment.



Correct disposal of used batteries According the EU Directive 2006/66/EC with changes contained in EU Directive 2013/56/ UE on the disposal of batteries, this product is marked with crossed-out garbage bin symbol. The symbol indicates that the batteries used in this product should not be disposed with regular household waste, but treated according to the legal directives and local regulations. It is not allowed to dispose of batteries and accumulators must use the available collection points of these items, to be returned, recycled and disposed of.

Within the EU, the collection and recycling of batteries and accumulators is a subject to separate procedures. To learn more about existing procedures of recycling of batteries and accumulators please contact your local office or an institution for waste disposal or landfill.



Giving this type of waste in the right places will help to conserve natural resources




The device and accessories are in line with the directives on operational safety, health and environmental protection referred to in the declaration of conformity. It is compatible with the provisions of the New Approach Directives.



Separate collection of used products and packing allows materials to be recycled and used again.

Documents / Resources

 <small>MANUAL</small>	setty mini Bluetooth speaker [pdf] User Manual mini Bluetooth speaker, mini, Bluetooth speaker
--	---

References

-  [Setty - portal z instrukcjami obsługi](#)