




Sharper Image 150w Car Power Inverter User Manual

[Home](#) » [Sharper Image](#) » Sharper Image 150w Car Power Inverter User Manual 

SHARPER IMAGE®

150W CAR POWER INVERTER
Item No. 207709



Thank you for purchasing the Sharper Image 150W Car Power Inverter. Please take a few minutes to read this guide and store it for future reference.

Contents

- [1 INTRODUCTION](#)
- [2 FEATURES](#)
- [3 PRODUCT DIAGRAM](#)
- [4 OPERATION](#)
- [5 LED LIGHT GUIDE](#)
- [6 SAFETY PRECAUTIONS](#)
- [7 SPECIFICATIONS](#)
- [8 WARRANTY / CUSTOMER SERVICE](#)
- [9 Related Posts](#)


INTRODUCTION

The Sharper Image 150W Car Power Inverter plugs into your car's 12V DC power outlet (cigarette lighter) to supply you with convenient AC power (110V), plus USB 5V/2.4A and Quick Charge 3.0 for your mobile devices.

FEATURES

- Convenient power supply for your car or SUV
- Plugs into the 12V DC power outlet (car cigarette lighter)
- USB 5V 2.4 Amp charging port
- USB Quick Charge 3.0 charging port
- AC outlet (110V)
- LED indicator light
- On/Off switch
- Built-in cooling fan
- Durable aluminum body

PRODUCT DIAGRAM

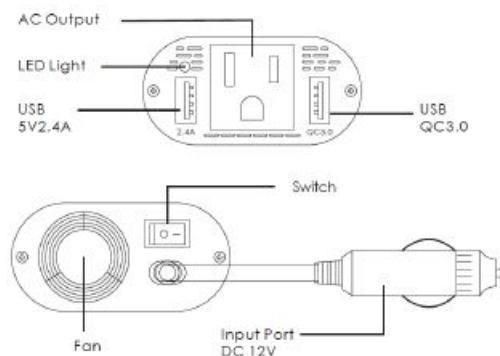

OPERATION

- Plug the inverter into your car cigarette lighter.
- Switch the device ON.
- The indicator light briefly turns RED, then turns BLUE for standby mode.
- Connect your electrical appliance or mobile device.
- Switch OFF and disconnect your device after use.

NOTE: The cooling fan will turn on only when the device gets hot (100°F/38°C).

LED LIGHT GUIDE

No light = No power supply or inverter is damaged

Continuous BLUE light = Standby or in use

Continuous RED light = Automatic safety shutdown

SAFETY PRECAUTIONS

- This product is for use with DC 12V (car cigarette lighter only), not for DC 24V use.
- It is normal for the inverter to become warm while using it.
- Avoid placing the inverter in direct sunlight or next to heat-sensitive materials.
- For best performance, the operating power of the appliance plugged into the inverter should be lower than 120W, although 150W is acceptable.

SPECIFICATIONS

Item No. 207709

Output Power 150W

Input Voltage DC 12V

Output Voltage AC 110V \pm 10%

USB Output 5V 2.4A and QC 3.0

Output Frequency 60Hz \pm 2Hz

Output Wave Form Modified Sine Wave

Overload Protection 180W \pm 20W

Short-circuit Protection YES

Overvoltage Protection 16.0V \pm 0.5V

Low-Voltage Protection 10.0V

Overheating Protection 65°C \pm 5°C

Size 4.13" x 2.56" x 1.42"

Weight 0.62 lbs.



WARRANTY / CUSTOMER SERVICE

Sharper Image branded items purchased from SharperImage.com include a 1-year limited replacement warranty. If you have any questions not covered in this guide, please call our Customer Service department at 1 (877) 210-3449. Customer Service agents are available Monday through Friday, 9:00 a.m. to 6:00 p.m. ET.

SHARPER IMAGE®

The SHARPER IMAGE® name and logo are registered trademarks.

©Sharper Image. All Rights Reserved.

[Sharper-Image-150w-Car-Power-Inverter-User-Manual-Optimized](#)

[Sharper-Image-150w-Car-Power-Inverter-User-Manual-Original](#)

[Manuals+](#)