


[Skip to content](#)

## **Manuals+**

User Manuals Simplified.



# **SKC 769-3003 PERMEA-TEC Sensor for Aliphatic Isocyanates Instruction Manual**

July 28, 2022 July 28, 2022 [Leave a comment on SKC 769-3003 PERMEA-TEC Sensor for Aliphatic Isocyanates Instruction Manual](#)

[Home](#) » [SKC](#) » SKC 769-3003 PERMEA-TEC Sensor for Aliphatic Isocyanates Instruction Manual 

Contents [hide](#)

[1 SKC 769-3003 PERMEA-TEC Sensor for Aliphatic Isocyanates](#)

[2 PERMEA-TEC Sensor for Aliphatic Isocyanates](#)

[3 Instructions for Use](#)


[4 Other PERMEA-TEC sensors are available for:](#)

[5 Documents / Resources](#)

[5.1 Related Manuals / Resources](#)



**SKC 769-3003 PERMEA-TEC Sensor for Aliphatic Isocyanates**

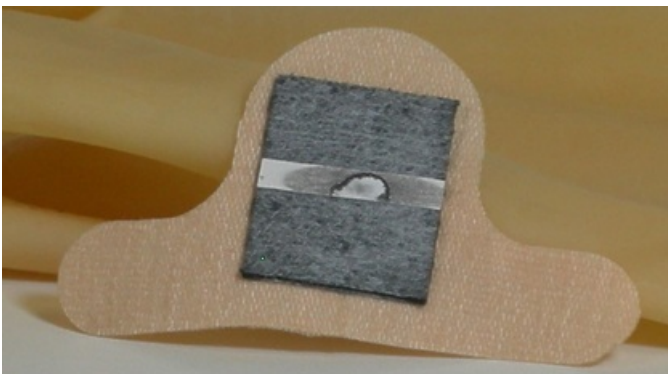

## PERMEA-TEC Sensor for Aliphatic Isocyanates

Cat. No. 769-3003

The PERMEA-TEC Sensor colorimetric screening method determines the effectiveness of chemical-protective gloves and clothing under actual use conditions. CLI's microencapsulation detection indicator changes color, indicating permeation for many common aliphatic isocyanates. Results enable professionals to select the gloves/clothing best suited for protection, acceptance, and cost-effectiveness. Easy-to-use PERMEA-TEC sensors are adhered to a worker's skin at points of greatest contact and abrasion before gloving or covering and are observed for color change at time intervals.

### Instructions for Use

To determine a user-safe time period for the particular glove, double gloving is recommended.

1. Affix PERMEA-TEC sensors to the thumb, middle finger, and palm on the outside of the glove currently being worn. Place the glove to be evaluated over the first glove.
2. After one hour, remove the outside glove and the underlying PERMEA-TEC sensors.
3. Evaluate the sensors for breakthrough. A positive indication of breakthrough results in a color change to red-orange.
4. If no breakthrough is indicated, apply fresh PERMEA-TEC sensors and continue to wear the outside glove for another hour. Follow Steps 2 and 3 to determine if breakthrough has occurred.
5. Repeat Steps 3 and 4 to determine a user-safe time period for gloves.


### Other PERMEA-TEC sensors are available for:

- Aromatic Amines: MDA, aniline, o-toluidine, methylene-bis(2-chloroaniline) (MOCA)
- Aromatic Isocyanates: TDI, MDI
- Aliphatic Amines: N,N-dimethyl cyclohexylamine, triethanolamine, diet hanola mine, and triethylenediamine
- Acid/Base: HCl, HF, HSO, and NH,
- Phenols Solvents: Bisphenol A

### SKC Limited Warranty and Return Policy

SKC products are subject to the SKC Limited Warranty and Return Policy, which provides SKC's sole liability and the buyer's exclusive remedy. To view the complete SKC Limited Warranty and Return Policy, go to [skcinc.com/warranty](http://skcinc.com/warranty).

### Documents / Resources



[SKC 769-3003 PERMEA-TEC Sensor for Aliphatic Isocyanates](#) [pdf] Instruction Manual  
769-3003 PERMEA-TEC Sensor for Aliphatic Isocyanates, 769-3003, PERMEA-TEC Sensor for Aliphatic Isocyanates

### Related Manuals / Resources



#### [PERMEA-TEC 769-3050 Sensor for Solvents User Guide](#)

PERMEA-TEC 769-3050 Sensor for Solvents The PERMEA-TEC Sensor colorimetric screening method determines the eff effectiveness of chemical-protective gloves...

#### [SCALE-TEC PROX Harvest Sensor User Guide](#)



SCALE-TEC PROX Harvest Sensor QUICK START GUIDE Use this Quick Start Guide to help you get set up...

### [V-TEC VT-8028 Infrared Motion Sensor Instruction Manual](#)



V-TEC VT-8028 Infrared Motion Sensor TECHNICAL DATA: Power Sourcing: 220-240V/AC Power Frequency: 50/60Hz Ambient Light: <3-2000LUX (adjustable) Time...

### [R TEC AUTOMATION Interior Sun Sensor User Guide](#)



R-TEC Smart Controls - Interior Sun Sensor RTMISS Interior sun sensors automatically manage daylight transitions at each window,...

## Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email

Website

Save my name, email, and website in this browser for the next time I comment.

## [Manuals+](#),

- [home](#)
- [privacy](#)