

SpeechWare 

**3 In 1 TableMike USB
Gooseneck Microphone**



SpeechWare 3 In 1 TableMike USB Gooseneck Microphone User Guide

[Home](#) » [SpeechWare](#) » **SpeechWare 3 In 1 TableMike USB Gooseneck Microphone User Guide** 

Contents

- [1 SpeechWare 3 In 1 TableMike USB Gooseneck Microphone](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 Introduction](#)
- [5 Understanding your TableMike dictation modes](#)
- [6 Using your TableMike with Dragon](#)
- [7 Audio Calibration](#)
- [8 Initial Training in Dragon](#)
- [9 FAQ](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)

SpeechWare 

SpeechWare 3 In 1 TableMike USB Gooseneck Microphone



Specifications

- Model: TABLEMIKE 1/3/6
- Design: Desktop design
- Mic Type: Longest available shotgun mic
- LED Modes: Green LED (Long-range) and Blue LED (Normal range)
- Connectivity: USB
- Compatibility: Mac and PC
- Features: Plug & Play, Push-to-Lock (PTL), Push-to-Talk (PTT)

Product Usage Instructions

Connecting the TableMike

1. Connect the USB cable to any port on your Mac or PC using the provided certified USBC adapter.
2. Ensure not to connect to a USB hub for optimal performance.

Configuring Sound Output

Windows

- Right-click on the speaker icon in the taskbar.
- Select 'Sounds' then navigate to the 'Playback' tab.
- Choose the desired playback device for sound output.

Mac

- Go to 'System Preferences' then 'Sound'.
- Select the appropriate device on the 'Input' tab.

Selecting Dictation Range

- Use the micro switch on the bottom of the TableMike 3-in-1 or 6-in-1 to choose the dictation range.
- The 1-in-1 model offers only the Normal range (Blue LED).

Using Push-to-Lock and Push-to-Talk Buttons

- Use PTL and PTT buttons to toggle or activate Dragon's mic on your screen.
- The default hot key for Dragon 15 is NumKey+.
- For Dragon 16, set the Dragon Microphone on/off hotkey to NumKey+.

Understanding Dictation Modes

- Green LED mode: Long-range dictation (25 cm to 50 cm) with VoiceMatic chipset for optimal performance in variable distances.
- Blue LED mode: Normal range dictation (5 cm to 25 cm) ideal for closer dictation and various applications like telephony, conferencing, and recording.

Voice Playback Adjustment

- The voice may sound different between modes due to audio processing; run 'Check Microphone' in Dragon when switching modes for best performance.

Introduction

Welcome to the SpeechWare USB TableMikes. You are going to be dictating with incredible accuracy and zero latency in no time. Even at long distances. These mics make the difference between being merely 'good' and having a consistently high accuracy. They combine a Shotgun microphone with a proprietary Speech Equaliser (SQ), Pressure or Touch Sensitive buttons, including a Push-to-Lock (PTL) and Push-to-Talk (PTT) to switch on/off the Dragon mic icon. An optional foot pedal to control the mics for unparalleled comfort is also available. If you are a professional, get the extra 1% to 3% of performance, with instant zero-latency transcription. Dispel any concerns of headset EMR and enjoy the freedom of not wearing, recharging or holding anything!

First things first

Your USB TableMike is unlike any other mike. It has a comfortable Desktop design and it is equipped with the longest available shotgun mic. With the long-range Green LED mode of the 3-in-1 and 6-in-1, you can dictate from several feet away with outstanding accuracy. The normal range Blue LED mode in all models functions like a regular mic.

Note that the 3-in-1 defaults to the Green Mode while the 6-in-1 to the Blue Mode. This can be easily changed by sliding with a paper clip the micro switch on the bottom of the base.

Directly connect the USB cable to any port on your Mac or PC (not a USB hub) using the provided certified USB-C adapter. The microphones are complete Plug & Play without needing to install an audio driver first; another major

advantage.


The sound output will be automatically sent through the speaker port of the 1-in-1 and 3-in-1 models, and the built-in high-quality speaker of the 6-in-1 too. To change this default Windows and Mac USB behaviour you can manually configure it as follows:

Windows

Right-click on the speaker icon in your taskbar, select 'Sounds' then the 'Playback' tab. For 1-in-1 and 3-in-1 select the internal PC speaker or other as desired.

Mac

Go to 'System Preferences' then 'Sound' and do the same, selecting the device on the 'Input' tab.

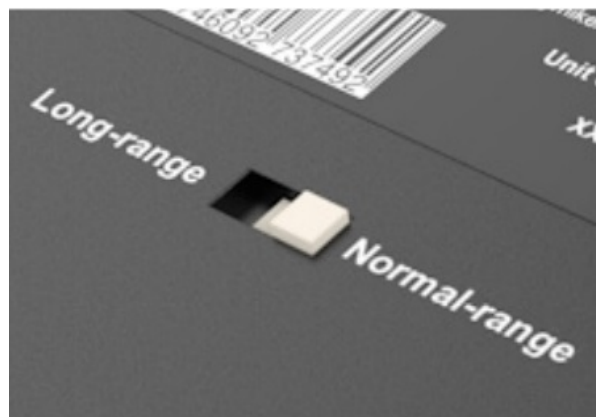

First things first

The micro switch on the bottom of your TableMike 3-in-1 or 6-in-1 allows you to easily select between the following dictation range:

- Slide the switch RIGHT to change to Blue LED mode
- Slide the switch LEFT to return to Green LED mode.

You do not need to worry about these dictation modes on the TableMike 1-in-1. It only provides Normal range; the Blue LED above.

Use the Push-to-Lock (PTL) and Push-to-Talk (PTT) buttons, when available, to permanently toggle or occasionally activate the Dragon's mic in your screen.

They both release the NumKey+ (lock or press) which is the default hot key for Dragon 15.

With ver. 16, you ONLY need to set the Dragon "Microphone on/off" hot key to this value.



Understanding your TableMike dictation modes

The 3-in-1 model is set to the unique Long-range Green LED mode by default. This activates our proprietary “VoiceMatic” chipset, an industry-first Speech Equaliser and Amplifier which is optimised for long and variable range dictation distance (25 cm to 50 cm / 10” to 20”) with normal office ambient noise.

With the micro switch on the bottom of the base, you can also select a Normal range dictation mode (Blue LED). This is the only mode on the 1-in-1 and is the default mode on the 6-in-1. This latter setting is for closer and variable dictation (5 cm to 25 cm / 2” to 10”) with higher ambient noise. It is also ideal for Internet HD telephony, full duplex Video conferencing, Podcasting, Voice and music recording.

It is vitally important you consider how you will be using your TableMike when choosing which mode to use. If you are likely to be a few feet away from the microphone – say, across a relatively quiet room – then the Green LED mode is best, the same is true if you have a low or tired voice. If, however, you are going to be sat at a desk with the mic closely in front of you, use the Blue LED normal range mode instead.

Your voice playback will sound a bit different between modes; this is due to the sophisticated audio processing of our VoiceMatic chipset taking place under the Green LED mode. As a result, for maximum flexibility and performance, you should eventually select and run ‘Check Microphone’ in Dragon each time you switch dictation mode – Green or Blue, as explained later on.




Using your TableMike with Dragon

There are a few more steps required to get the best out of your TableMike with Dragon, no matter which model

you have. Follow these steps to get off with the best possible maximum performance.

They are applicable whether you are using the Green or Blue LED setting but are especially pertinent in Green mode as you will be dictating from a significant distance to the microphone –not possible with any other desktop microphone.

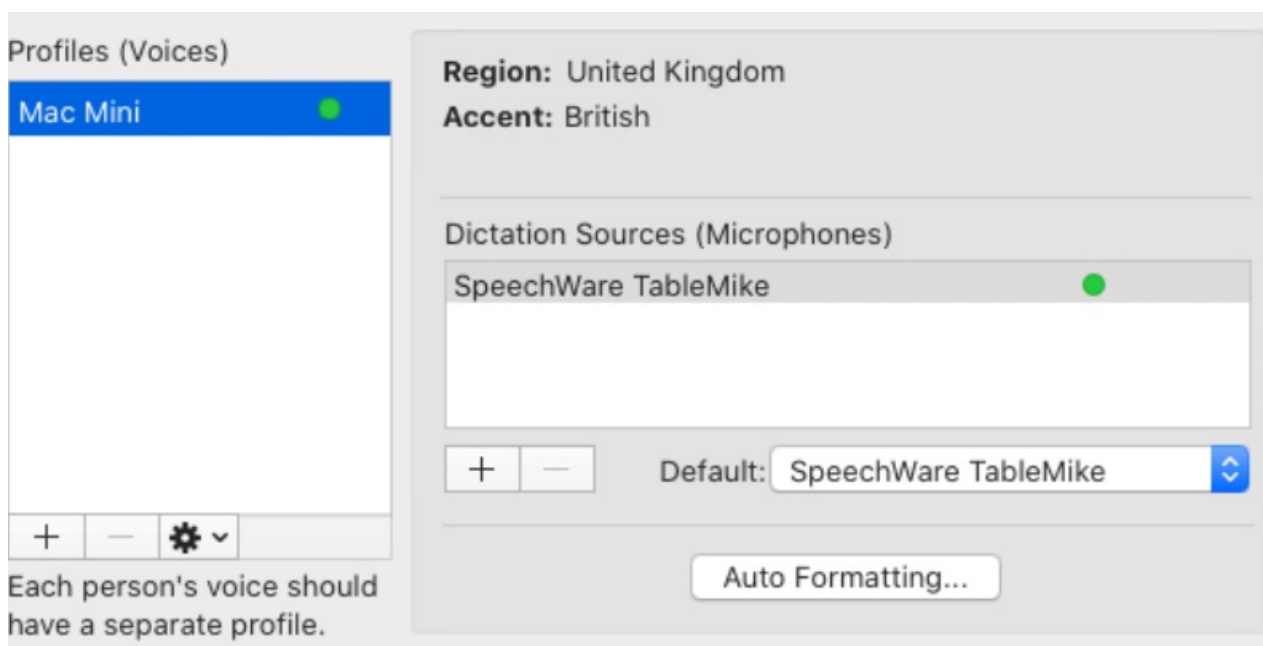

Audio Calibration

After you have added your mic to Dragon (see right), you will need to perform the 'Check Microphone' setup. Dragon will ask you to dictate the short passage of text provided to calibrate audio. Make sure you do as follows:

1. Start the process but pause for 3 to 5 seconds before speaking. Dragon requires this initial period of silence to determine the ambient noise levels of both your microphone and your surroundings.
2. Speak clearly in your natural tone of voice. Do not talk too quickly or too slowly and do not raise your voice at all. Do it
"naturally speaking"!
3. If Dragon reports the audio level is too low (maybe if your TableMike is in Blue LED mode), move close to its tip or eventually switch to Green mode and run the calibration again.
4. Open the TextEdit (Mac) or the Notepad (Windows) and perform the initial training described on the next page to kickstart your accuracy.




Dragon Professional for MacOS

If you are using an existing profile, select 'Manage Profiles' in the Dragon menu to add your 'SpeechWare USB microphone' (if you like, name it 'TableMike') with the '+' button under 'Dictation Sources'. If this is a brand new profile, Dragon will simply prompt you to add the microphone.

Dragon Professional for Windows

Create a new User Profile or add the mike to an existing one by opening it, In the DragonBar select 'Settings' – 'Microphone' – 'Chose Microphone' – 'USB TableMike'. Then 'Check Microphone'.

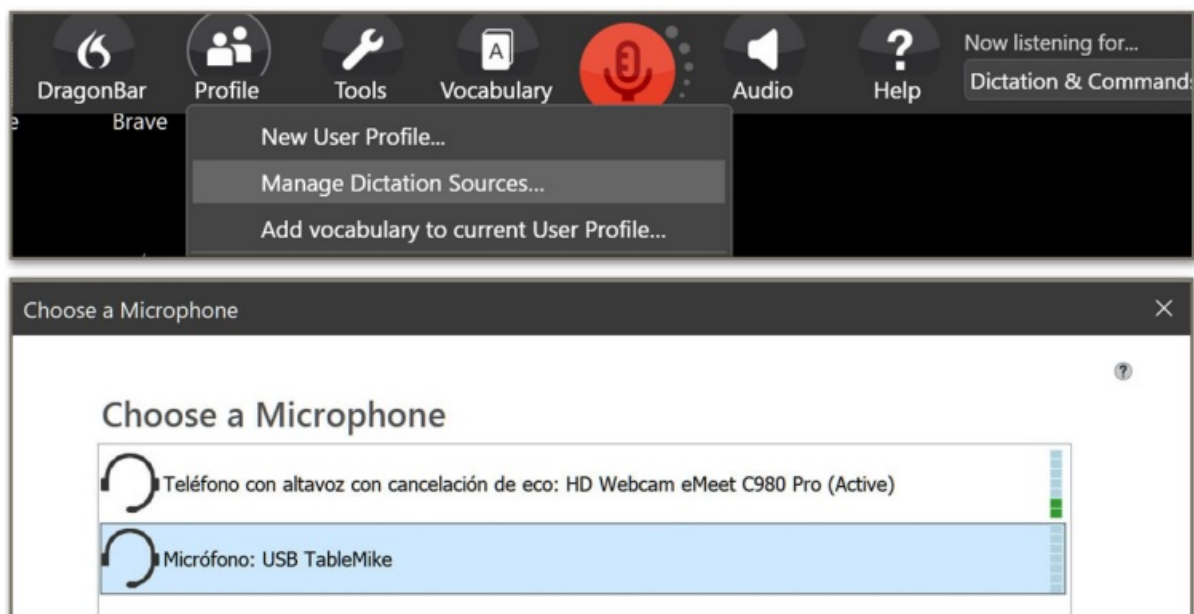

Initial Training in Dragon

Additionally, you may train Dragon with your TableMike to get the best possible accuracy.

This is especially recommended under the Green LED mode (3-in-1 or 6-in-1 only) where you may be using the unique "VoiceMatic" chipset to dictate at significant and variable distance from the mic (25 cm to 50 cm / 10" to 20").

Open a new document. For Mac users, this should be in TextEdit; for Windows users, Notepad or WordPad. It's important to keep things simple and dictate into plain text for now as we are purely focused on recognition accuracy and not formatting at this stage.

Read out loud a thousand words of something you have previously written and dictate to Dragon, but now using your new TableMike.

Then, you must use the "correct that" or "correct <the mistake>" commands to rectify any words or phrases Dragon may have gotten wrong. Save your profile and exit the program.

Reopen Dragon and perform this exercise again, making sure to correct any further mistakes with your voice and the “correct that” voice command or similar (do not correct via the keyboard).

If there are any unique words or phrases you use in your writing, or anything Dragon regularly fails to recognise, be sure to save them to your vocabulary.

Also, eventually use the “Train” function in Dragon’s Vocabulary Editor so it can learn how you say those things. Your mic should now perform at the highest possible level of accuracy.

Otherwise, use the SpeechWare PhraseWizard optional application to customise your vocabularies even further.

Remember, the more you dictate, voice correct, and add unknown words or phrases the more accuracy you will get!

This Guide, a quicker Setup notice, a short Video and a nice Brochure are also and always available

at: <https://www.speechware-store.com/pages/manuals>




Even More Accessibility


When configured with the optional SpeechWare Octopus USB Controller, the press of the TableMike volume buttons, any key, USB foot pedal or lever connected to the PC can do any of the following actions:

- Switch the Dragon mic icon on and off
- Insert boilerplate text (of your choosing)
- Open any application, document, web-page, or folder
- Initiate any of a series of Windows activities, such as moving forward and backward through open applications, opening the Task Manager, etc.
- Emulate any key or key-combination, including any Dragon Hotkey or command
- Combine an unlimited number of the above functions into a single “script” of any length..

An optional Foot Pedal for the 3 models to switch the Mic on/off is also available.

Enjoy the incredible comfort of dictating hands-free

Model and Features	USB 9-in-1 TableMike (Next generation 2025)	6-in-1 (in 2024)	3-in-1 (in 2025)	3-in-1 ^(1*)	1-in-1 ^(2*)
Design and specifications					
Type	<ul style="list-style-type: none"> Desktop mic for maximum comfort USB driverless plug & play Tactile touch sensitive buttons High quality built-in speaker for hi-fi music and voice reproduction Dark black colour 	The same as the next gen. 6-in-1, but without the speaker	The same, but with pressure buttons and without the speaker	The same, but with pressure buttons and without the speaker. Grey Pantone 416C color	
Microphone Boom	Longest available, all flexible, detachable and exchangeable (42 cm - 16.5") for optimum placement, easier removal, portability and storage				
Microphone capsules	Industry-first support for: <ul style="list-style-type: none"> The Cardioid unidirectional capsule for <u>Normal</u> (25 cm) and <u>Long-range</u> (50 cm) dictation An optional Dynamic one also for <u>Short-range</u> (5 cm) dictation in very noisy environments Any other one cardioid or dynamic, connected through the mono mic-in port of the back panel 				
Front panel buttons	Industry-first 9 touch buttons: <ul style="list-style-type: none"> Volume Down Volume Up Microphone ON/OFF Push-to-Lock (PTL) Push-to-Talk (PTT) Four (4) Hotkeys  <p>PTL & PTT and 4 Hotkeys buttons for direct control of Dragon and Dolby Fusion Narrate microphone icons hotkeys</p> 	Industry-first 5 touch buttons: <ul style="list-style-type: none"> Volume Down Volume Up Microphone ON/OFF Push-to-Lock (PTL) Push-to-Talk (PTT)  <p>PTL & PTT buttons for direct control of Dragon NaturallySpeaking and Dolby Fusion Narrate microphone icons</p>	Same five (5) buttons but pressure sensitive for control of Dragon and Dolby Fusion Narrate microphone icons	Same four (4) buttons but pressure sensitive. No Push-to-Talk (PTT)!	
"Hotkey" buttons	They are configured to: <ul style="list-style-type: none"> Playback (Shift + NumKey-) Rewind (Shift + NumKey/) Open Dictation Box (Ctrl+Shift+D) Next Field (Ctrl + Shift + N) 		Not supported		

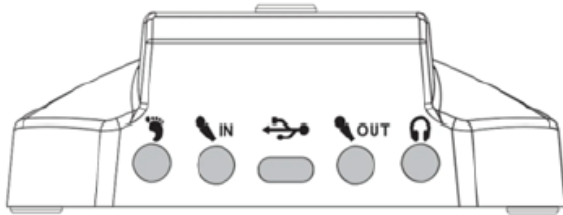Model and Features	USB 9-in-1 TableMike (Next generation 2025)	6-in-1 (in 2024)	3-in-1 (in 2025)	3-in-1 ^(1*)	1-in-1 ^(2*)
Back panel	<p>Five (5) ports, from right to left of the image, for:</p> <div></div> <ul style="list-style-type: none">• Industry-first optional foot pedal to control the Microphone ON/OFF button• Mono 3.5 mm audio input to connect any external microphone or headset, which disables the microphone boom• Standard Type-C connector for the bundle cable with audio ferrite filter or any other similar available• Industry-first 3.5 mm mono mic-out for hi-fi amplifier or wireless transmission emitter with its own mic bias (2V - 5V)• Mono 3.5 mm headphone port for audio monitoring or playback			Three (3) ports for the Type-C cable, the standard 3.5mm mono headphone and the optional foot pedal only	
Performance					
Top audio specs	<p>Proprietary VoiceMatic audio chipset for speech with:</p> <ul style="list-style-type: none">• Up to 44.1, 48 and 96 KHz sample rates (the latter for 6-in-1 only)• 16/24 bit depth (the latter for 6-in-1 only)• Very high, instant and zero latency, recognition accuracy				
Dictation distances	<p>Proprietary VoiceMatic audio chipset for speech supports:</p> <ul style="list-style-type: none">• Normal (25 cm) self-adjusting dictation range (under Blue LED)• Long-range (50 cm) self-adjusting dictation (Green LED)• Short-range (5-10 cm) self-adjusting dictation in very noisy environments with the optional Dynamic microphone capsule. <p>The recommended up to 25 cm (under Blue) and 50 cm (Green) distances of the microphone tip, depend on voice volume and background noise</p>			Only Normal range (25 cm) self-adjusting voice input (Blue LED)	
Technical references					
Compatibility	<p>Driverless and <u>Plug & Play</u> for:</p> <ul style="list-style-type: none">• <i>Windows, Vista, XP, 7, 8, 10 and 11</i>• Most <i>MacOS</i> versions• Most <i>Linux</i> versions				
Certifications	<ul style="list-style-type: none">• <u>European</u> CE mark certification under the EU Directive 2014/30 relating to electromagnetic compatibility (full report available)• <u>American</u> FCC certification under 47 CFR, Part 15, Subpart B and CISPR PUB. 22 (full report available)• <u>Japanese</u> VCCI certification under CISPR 32 (full report available)				
EAN	Not yet available		0746092737492	0608631110275	
UTC	Not yet available		0746092737492	0608631110275	

Commercial References

Best in class "5 Dragons" certification by Nuance for Dragon NaturallySpeaking

Many raving press reviews worldwide, as for instance in the world leading MacWorld, MacWelt, etc. like for instance:

- [MacWorld Article USB 6 in 1 TableMike Great for Mac Speech Recognition](#)
- [MacWelt Article Test Speechware USB 9-in-1 TableMike](#) (in German)
- [MacWorld Article FlexyMike Dual Ear Cardioid Review. One of the Finest Mics available for dictation on your Mac](#)

Warranty

Two years from date of invoice according to: [Warranty Information](#)

Other Details

ETA	2025	2024	2025	Available (1*)	Available (2*)
ETA optional Dynamic Mic	2025				

1. <https://www.speechware-store.com/products/speechware-1-en-1>
2. <https://www.speechware-store.com/collections/tablemikes/products/tablemike-3-in-1>

FAQ

Q: How do I change dictation modes on TableMike?

A: Use the micro switch on the bottom of the TableMike 3-in-1 or 6-in-1 to easily select between Green LED (Long-range) and Blue LED (Normal range) modes.


Q: What are the default modes for 1-in-1 and 6-in-1 models?

A: The TableMike 1-in-1 defaults to the Normal range (Blue LED) mode, while the 6-in-1 defaults to the Green LED mode.

Q: How do I configure sound output on Windows?

A: Right-click on the speaker icon in the taskbar, select 'Sounds', then navigate to the 'Playback' tab to choose the desired playback device.

Documents / Resources

	SpeechWare 3 In 1 TableMike USB Gooseneck Microphone [pdf] User Guide 3 In 1 TableMike USB Gooseneck Microphone, TableMike USB Gooseneck Microphone, USB Gooseneck Microphone, Gooseneck Microphone, Microphone
---	--

References

- [!\[\]\(a22ba4e13c745edbf29e51af246c4c12_img.jpg\) Test: Speechware USB 9-in-1 Table Mike - Macwelt](#)
- [!\[\]\(33b18af9a4b997eb52666cfeb3c44157_img.jpg\) USB 6-in-1 TableMike great for Mac speech recognition | Macworld](#)
- [!\[\]\(262b158440b847a82f89a14cab8644ec_img.jpg\) FlexyMike Dual Ear Cardioid review: One of the finest mics available for dictation on your Mac | Macworld](#)
- [!\[\]\(f51929fecf7b0dc947ac13f4c4835e8f_img.jpg\) Warranty Information – SpeechWare Store](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.