
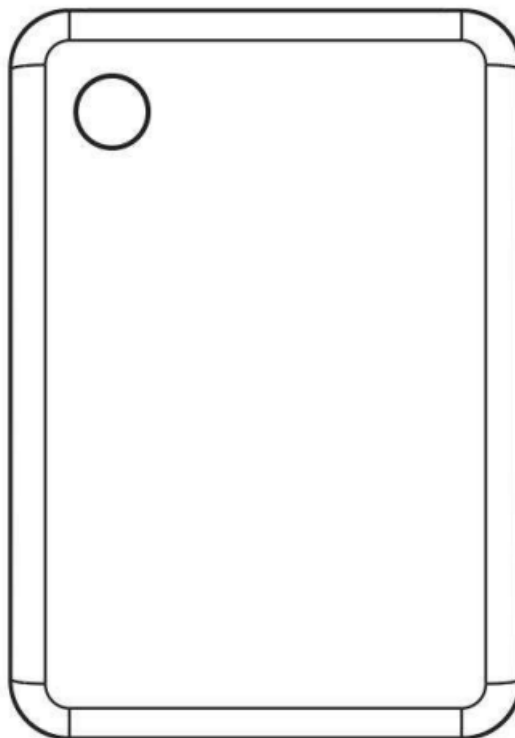




SUPERLED 59127 Twilight Switch Instruction Manual

[Home](#) » [SUPERLED](#) » SUPERLED 59127 Twilight Switch Instruction Manual 

SUPERLED
LIGHT-CONTROL




Manual

Contents

- [1 Welcome to using the photocell sensor!](#)
- [2 SPECIFICATION](#)
- [3 INSTALLATION\(see the figures\)](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

Welcome to using the photocell sensor!

The product can turn on or turn off the light automatically according to ambient light. Ambient temperature and humidity can't affect it. It is not only convenient but also practical; it can control the load working only at night. For instance road lights, garden lights, etc.

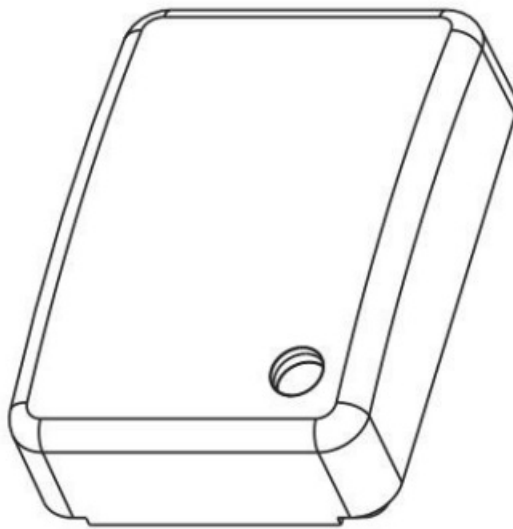

SPECIFICATION

Power source: 220V – 240V/AC

Power Frequency: 50Hz

Rated Current: 15A

Ambient Light: <10-100LUX.ON


>40-250LUX .OFF (adjustable)

Working Temperature: -20~+45

Working Humidity: <93%RH

INSTALLATION(see the figures)

- Switch off the power.
- Moving the screws in the items and cover, Mount the bottom case on the wall and connect the cable as shown in the connection-wire figure.
- Please install the item in the correct direction (see figure A) which shows in the cover and according to the correct installation place with the enclosed inflated screws.

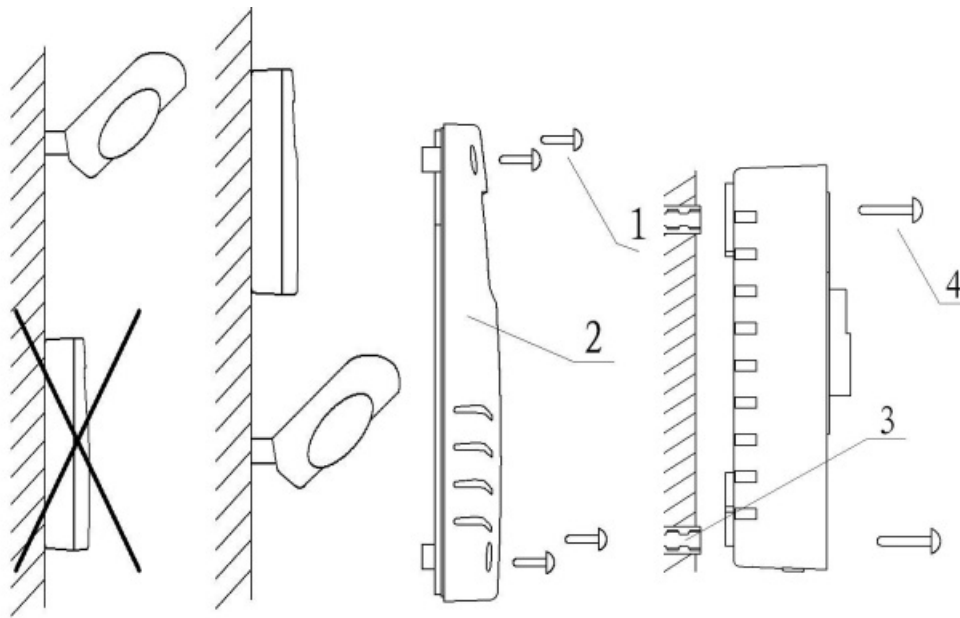


INCORRECT

CORRECT

Figure A


- Please install the item with Screwing the cover. Switch on the power and test it.

CONNECTION-WIRE FIGURE

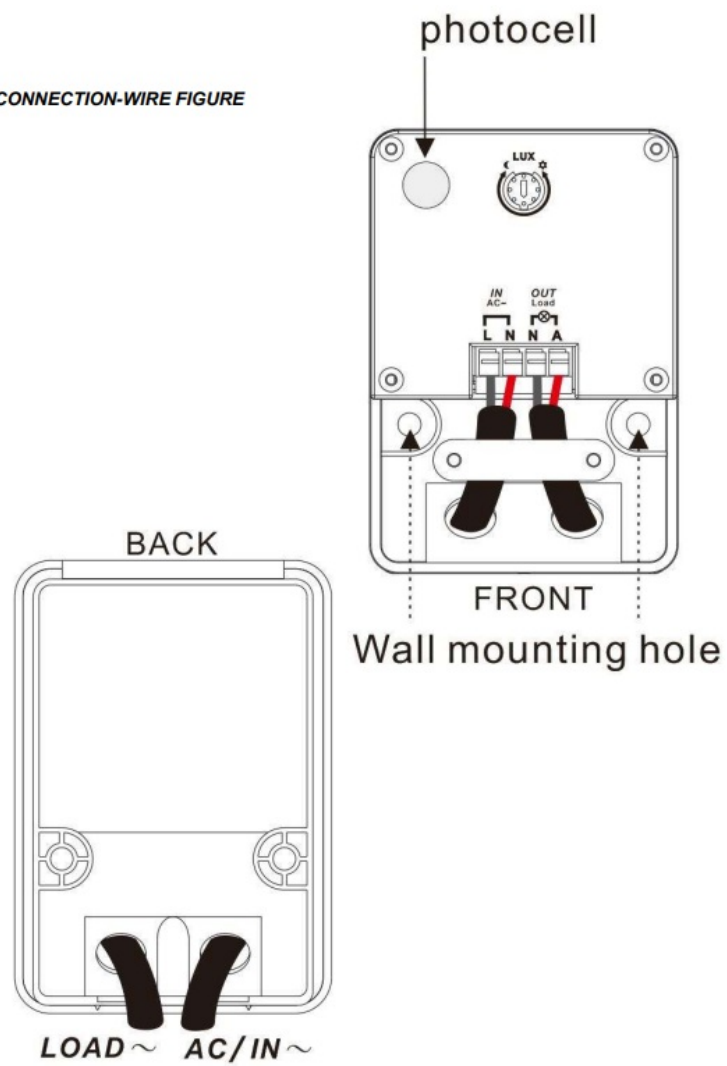

TEST


- Switch on the power.
- Please prepare an opaque (such as a towel) when you test in the daytime.
- When the towel covers the detection window of the photocell, the ambient light of the items will be dark, it makes the lamp on.
- When take off the towel, it makes lamp off automatically.

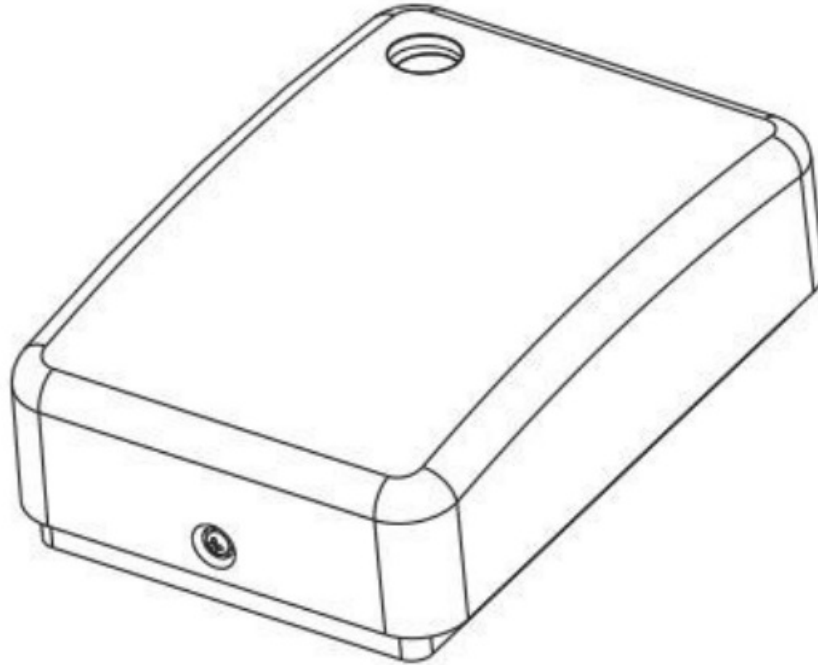

NOTE

- In front of the photocell, it should be no obstruction affecting to acceptance of natural light.
- In front of the photocell, it should be no swaying object.
- Don't install the photocell under light or the place where the light will be irradiated to the photocell.
- When the lamp is on and the intensity of another light source reaches the light off LUX value, and this light lasts for more than one minute, the lamp will switch off,

Documents / Resources

	<p>SUPERLED 59127 Twilight Switch [pdf] Instruction Manual 59127, Twilight Switch, 59127 Twilight Switch</p>
---	--