

suptek CS303 DVD Floating Shelf Instruction Manual

Home » Suptek » suptek CS303 DVD Floating Shelf Instruction Manual

Contents

- 1 suptek CS303 DVD Floating Shelf
- 2 WARNING
- 3 OVERVIEW
- 4 INSTALLATION
- **5 Documents / Resources**
 - **5.1 References**




suptek CS303 DVD Floating Shelf



WARNING

- Do not begin the installation of the product before you have read and understood theinstructions and warnings
 contained in this installation sheet. if you have any questions regarding any of the instructions or warnings,
 please contact your local distributor.
- Please refer to the installation guide recommendation for the required distance from the wall to avoid the risk of property damage.
- This product should only be installed by someone of good mechanical aptitude, with experience in basic building, and full understanding.
- Make sure that the supporting surface will safely support the combined load of the equipment and all attached hardware and components.
- If mounting to wood wall studs, make sure that mounting screws are anchored into the centre of the studs. Use of an "edge to edge" stud finder is highly recommended.
- Always use an assistant or mechanical lifting equipment to safely lift and position equipment.
- Tighten screws firmly, but do not over-tighten. Over-tightening can damage the items, greatly reducing their holding power.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.
- · Never exceed the maximum load capacity.

OVERVIEW

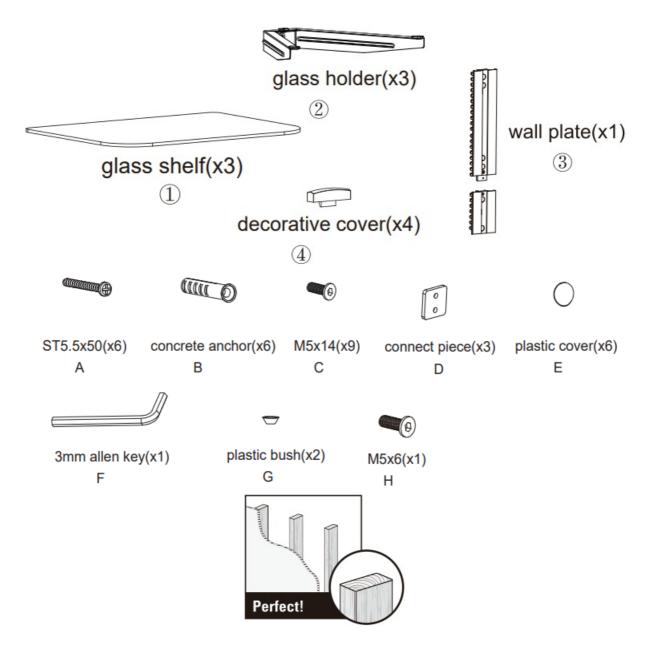

Tools required

- Phillips Head Screwdriver (200mm length excluding the handle)
- Electric drill and 8mm masonry bit for concrete wall installation
- Marking Pen
- Hammer

INSTALLATION

STEP 1A WOOD STUD WALL MOUNTING:


• Use a stud finder to locate the edges of the studs. Use of an edge-to-edge stud finder is highly recommended.

Based on their edges, draw a vertical line down each stud's centre.




• Place wall plate on wall as a template. And mark the centre of the four mounting holes. Make sure that the

mounting holes are on the centerline of a stud.




• Drill four 1/8"(3mm) dia. Holes 1.2"(30mm) deep. Secure it using four screws(A), make sure that the wall plate is level as shown in fig.1.1.




STEP 1B SOLID BRICK AND CONCRETE BLOCK MOUNTING:

• Use the wall plate as a template to mark four-hole locations on the wall.



• Pre-drill these holes with an 8 mm masonry bit and depth is at least 50mm. Insert a Concrete Anchor(B) into each of these holes. Attach the wall plate to the wall using two screws(A), make sure that the wall plate is level as shown in fig.1.2.



STEP 2 ASSEMBLING THE GLASS HOLDER

- Attach the connect piece to the glass holder using two screws and space reserved 3mm as shown in fig.2.1.
- Use the same method to assemble the other glass holder.


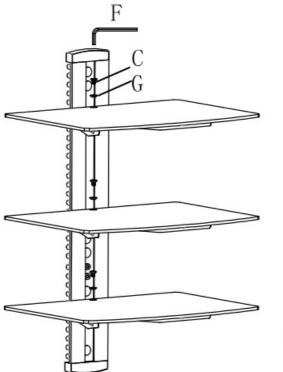


fig.2.1

STEP 3 INSTALLING THE GLASS HOLDER

• Insert the three glass holders into the wall plate along the wall plate rail at the desired height respectively.

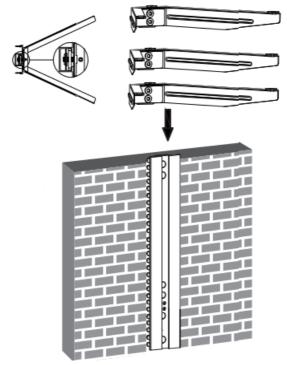

• Then tighten four screws with a 3mm Allen key as shown in fig.3.1 to avoid wobbly situation.






fig.3.1

• Insert two decorative covers to the top and bottom of wall plate respectively and install six plastic covers.




• You can adjust the height of the glass holders as needed. Loosen the screws with a 3mm Allen key(but not

remove) to adjust the glass holders at the desired height and then tighten screws with a 3mm Allen key as shown in fig.3.2.



STEP 4 INSTALLING THE GLASS SHELF

• Place the three glass shelf gently on the three glass holders. Attach the glass shelves to the glass holders using screws and plastic bushes, tighten screws with a 3mm Allen key but not tighten completely at this time. Center the glass shelves over holes, securely tighten screws with a 3mm Allen key as shown in fig.4.1.

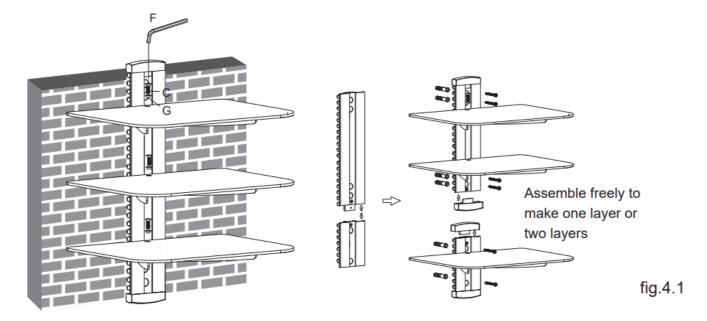

STEP 5 CABLE MANAGEMENT

After installing the DVD wall mount, place DVD gently on the mounted glass shelves. Pull out the cable clip, insert the cable into any of the opening of the clip, with one head of the cable inserted in the clip, insert the clip into the main pole, take out the other head of the cable from another opening of the clip, then push the clip until the end of the main pole.


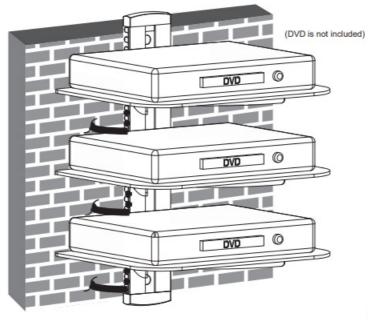


fig.5.1

after-sales@suptekmount.com

Documents / Resources



suptek CS303 DVD Floating Shelf [pdf] Instruction Manual
CS303 DVD Floating Shelf, CS303, DVD Floating Shelf, Floating Shelf, Shelf

References

• User Manual

Manuals+, Privacy Policy