



TAIYA1 10th Generation 2023 Case Smart Keyboard Instruction Manual

[Home](#) » [TAIYA1](#) » TAIYA1 10th Generation 2023 Case Smart Keyboard Instruction Manual 



Contents

- [1 TAIYA1 10th Generation 2023 Case Smart Keyboard](#)
- [2 Package Contents](#)
- [3 Product Descriptions](#)
- [4 Getting Started Guide](#)
- [5 Bluetooth Keyboard Hot Keys](#)
- [6 Indicator Lights and Charging Descriptions](#)
- [7 Bluetooth Connection Steps](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

TAIYA1 10th Generation 2023 Case Smart Keyboard




Package Contents

- User Manualx1
- Bluetooth Keyboardx1
- USB Cablesx1
- Service Cardx1

Product Descriptions

1. Bluetooth Standard Interface
2. Operating Distance: 10 meters(33 ft)
3. Operating Voltage: 3.0-4.2V
4. Working Current: 0.2-1.35mA
5. Standby Current: 0.12mA
6. Sleep Current: 25.8uA
7. Charging Current: 100mA
8. Standby Time: >130 days
9. Charging Time: 2-3 hours
10. Lithium Battery Capacity: 500mAh
11. Sustainable Working Time: > 100 hours
12. Lithium Battery Life: 3 years
13. Key Strength: 80+/- 10 g
14. Key Life: 5 million stroke
15. Operating Temperature: -10°C- +55°C

Getting Started Guide

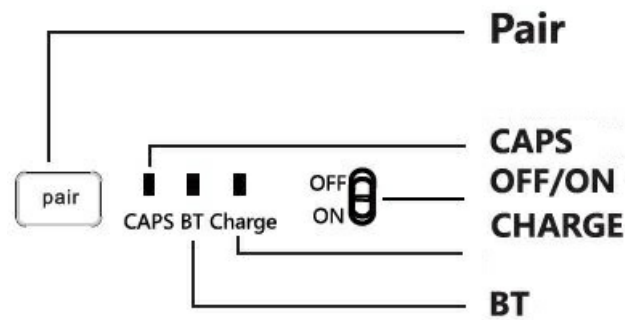


- **Pair** – Bluetooth pairing button: When the keyboard is turned on and not connected, press and hold this button for 2 seconds to start Bluetooth pairing
- **CAPS** – Caps Indicator Light: Light on when caps applied
- **OFF/ON** – Power Switch: Turn ON/OFF the keyboard
- **CHARGE** – Charging Indicator Light: Light be RED when the keyboard is in charging, light be GREEN when it's fully charged
- **BT** – Bluetooth connection indicator: pressing the Bluetooth pairing button “Pair” for 2 seconds the indicator blinks and the keyboard is in the manual pairing state (it will automatically reconnect when it is turned on again, no need to press “Pair”). When the connection is successful, the indicator will go out automatically BT – Power Indicator Light: BLUE light on for 2s when the keyboard is turned on; RED light flashes when the battery level is low

Touch function: Touch function is turned on by default every time the machine is turned on.



Turn off the touch function: “Fn” + “A”: Press the “Fn” key and “A” key at the same time to turn off the touch function.

Note: iPad needs to be uparaded to IOS13 or above to support the multi-function touchpad function

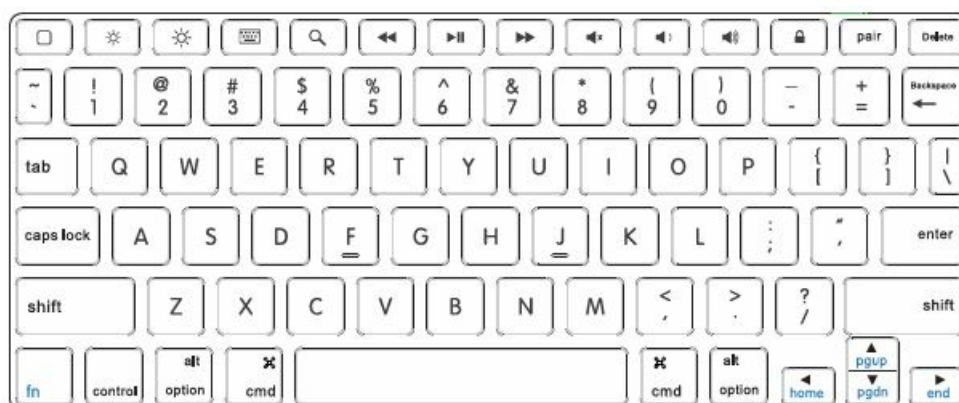Keyboard layout



Bluetooth Keyboard Hot Keys

	Esc		Brightness-/+		Fingerboard
	Search		Prev Track		Play/Pause
	Next Track		Volume OFF		Volume -/+
	Lock Screen				

Keyboard Touchpad Gesture Operation

Keyboard Touchpad Gesture Operation		
Gesture		Function
One Finger	Click with one finger	Click can be customized(default)
	Move with one finger	Cursor move
	Click twice with one finger and drag	Drag
Two Fingers	Click with two fingers	Open the menu can be customized (default)
	Move up and down with two fingers	Vertical scroll wheel
	Move left and right with two fingers	Desktop two fingers move left and right to switch pages
Three Fingers	Click with three fingers	Customized(Default)
	Move up with three fingers	Switch to recently opened windows
	Move down with three fingers	Turn to Homepage
	Three fingers move to left and stop	Switch the active window to the left
	Three fingers move to right and stop	Switch the active window to the right

How to use the “Command” key?

How to use the “Command” key?		
1	Command + Z	Cancel
2	Command + X	Cut
3	Command + C	Copy
4	Command + V	Paste
5	Command + A	All select
6	Command + S	Save
7	Command + F	Search

Attention

1. When not in use for a long time, it's supposed to be turned off for sake of battery life
2. To obtain longer battery life, charge the keyboard only when it need charging and ensure 2h of charging duration

Indicator Lights and Charging Descriptions

- **BT LED:** Power indicator light, When the keyboard is turned on, the" BLUE " light turns off auto- matically after 3s; when battery level is low, " RED " light flashes BT LED: Bluetooth indicator light, when "Pair" button is pressed ,the" BLUE " light starts flashing; when keyboard is paired, it turns off automatically
- **CHARGE LED (Red):** Charging indicator light, when the keyboard is in charging, this LED lights in RED; it turns Green when keyboard is full charged
- **CAPS LED (Blue) :** Caps indicator light – When the keyboard is in uppercase, the Caps light on

Note: If it does not light up or the caps lock function cannot be used, be sure to check the iPad settings: Settings – General – Keyboard – Hardware Keyboard -Switch Languages Using Caps Lock to OFF


- To charge this keyboard, connect it to phone charger, power bank, wall charger or computer device with micro USB cable
- First time touse the keyboard, do as possible to charge it 6h and up, later when battery level is low, charge it 2h each time
- When the BT LED "RED" flashes, it indicates the battery level is low, please charge it in time
- During charging the light will stay on, until it is full charged, it goes off

Bluetooth Connection Steps


1. Down slide the power switch to turn on the keyboard, press Pair button



2. Open and unlock your electronic device go to " Setting"

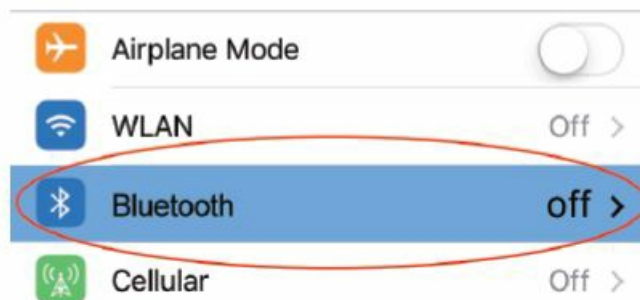


3. Go to "Bluetooth" and enable Bluetooth of your device, it will automatically search for nearby devices

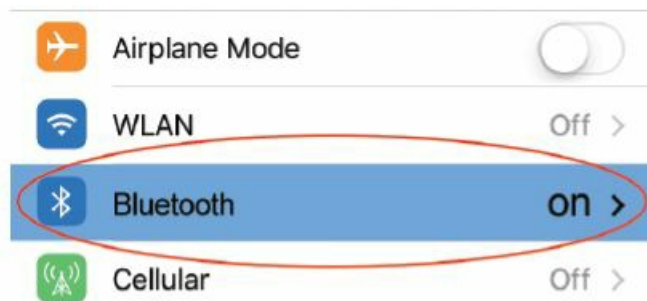

4. Find the Bluetooth Keyboard device, click connect



Documents / Resources



[TAIYA1 10th Generation 2023 Case Smart Keyboard](#) [pdf] Instruction Manual
10th Generation 2023 Case Smart Keyboard, 10th, Generation 2023 Case Smart Keyboard, 20
23 Case Smart Keyboard, Case Smart Keyboard, Smart Keyboard, Keyboard

References

- [User Manual](#)