



TAIYANG B09SV45QWF Smart Keyboard for Samsung Galaxy Tab User Guide

[Home](#) » [TAIYANG](#) » TAIYANG B09SV45QWF Smart Keyboard for Samsung Galaxy Tab User Guide 

Contents

- [1 TAIYANG B09SV45QWF Smart Keyboard for Samsung Galaxy Tab](#)
- [2 Package Contents](#)
- [3 Product Descriptions](#)
- [4 Getting Started Guide](#)
- [5 Bluetooth Keyboard Hot Key](#)
- [6 Bluetooth Connection And Indicator](#)
- [7 Trouble Shooting And Cleaning](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)
- [9 Related Posts](#)

TAIYANG

TAIYANG B09SV45QWF Smart Keyboard for Samsung Galaxy Tab



Package Contents


- 1x Bluetooth Keyboard
- 1x Charging Cable
- 1x User Manual
- 1x Service Card

Product Descriptions

1. Bluetooth Standard Interface
2. **Operating Distance:** 10 meters(33 ft)
3. **Operating Voltage:** 3.7 V
4. **Working Current:** < 2.5mA
5. **Standby Current:** < 0.3mA
6. **Sleep Current:** < 40uA
7. **Charging Current:** > 200mA
8. **Standby Time:** > 130 days
9. **Charging Time:** 2-3 hours


10. **Lithium Battery Capacity:** 500mAh
11. **Sustainable Working Time:** > 100 hours
12. **Lithium Battery Life:** 3 years
13. **Key Strength:** 80+/- 10 g
14. **Key Life:** 5 million stroke
15. **Operating Temperature:** -10°C- +55°C

Getting Started Guide

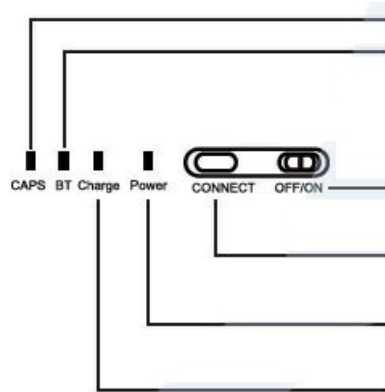



- **CAPS:** Caps Indicator Light: Light on when caps applied.
- **BT-Bluetooth Indicator Light:** The light flashes when “connect” button is pressed and it’s in an auto-pairing status, light off after keyboard is successfully connected keyboard will automatically reconnect in later use when power on).
- **OFF/ON:** Power Switch: Control the power on/off of the keyboard.
- **Connect:** Bluetooth Pairing Key: When Keyboard is turned on and unpaired, click this key to initiate pairing.
- **Power:** Power Indicator Light: Light on for 2 secs when keyboard is turned on, it flashes when battery level is low. Charge it in time.
- **Charge:** Charging Indicator Light: Light on when keyboard is in charging, light off when it’s full charged.

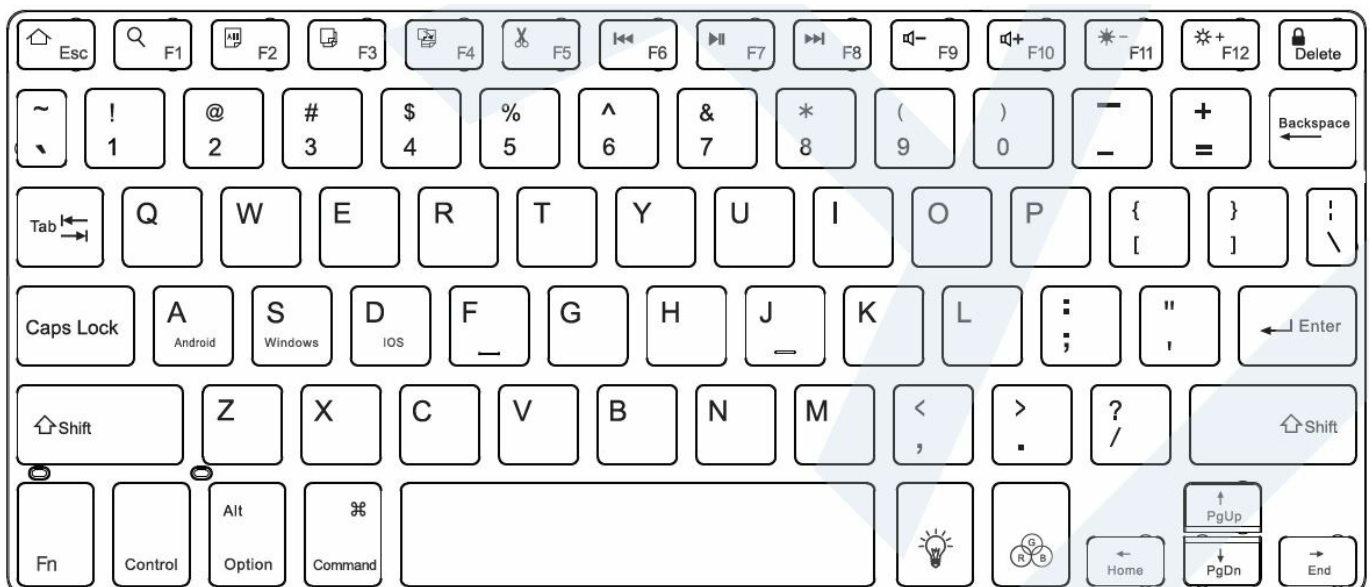Backlit Sets



Bluetooth Keyboard Hot Key

	Esc		Search		Select All
	Copy		Paste		Cut
	Prev Track		Play/Pause		Next Track
	Volume -/+		Brightness -/+		Lock Screen
	Backlit			RGB	

-  **Backlit Mode Key:** Click to switch from the 3 light modes contain always on / breath- ing/off.
-  **Backlit RGB Key:** Click to switch from the 7 RGB colors.

How to switch the appropriate system and language before using the keyboard?

1	FN+	Android	Android system	NOTE: When using the keyboard, please adjust to the same system as the device after connecting Bluetooth.
2	FN+	Windows	Windows system	
3	FN+	iOS	iOS system	
4	Shift+	Space	Switch language for Android system	
5	Ctrl+	Space	Switch language for iOS system	
6	Win+	Space	Switch language for Windows system	
	Shift+	Alt		
	Ctrl+	Shift		

Attention

1. When not in use for a long time, it's supposed to be turned off for sake of battery life.
2. To obtain longer battery life, charge the keyboard only when it need charging and ensure 2h of charging duration.

Bluetooth Connection And Indicator


Bluetooth Connection Steps



1. Right Slide the power switch to turn on the keyboard, press connect button.



2. Open and unlock your electronic device, go to "Setting".

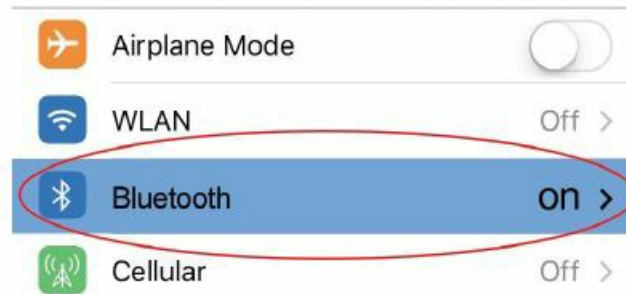

3. Go to "Bluetooth" and enable Bluetooth of your device, it will automatically search for nearby devices.



4. Find the "Bluetooth Keyboard" device, click connect.

Indicator Lights and Charging Descriptions

- **Power LED (blue):** Power indicator light, it goes on for 2s when power on then goes off, when battery level is low, it flashes.
- **Charge LED (red):** Charging indicator light, when the keyboard is in charging, this LED lights in red; It turns off when keyboard is full charged.
- **BT LED (blue):** Bluetooth indicator light, when Connect button is pressed, this light starts flashing; when keyboard is paired, it turns off automatically.
- **Caps LED (blue):** Caps indicator light – When keyboard is in uppercase, the Caps light on.
- To charge this keyboard, connect it to phone charger, power bank, wall charger or computer device with charging cable.
- First time to use the keyboard, do as possible to charge it 6h and up, later when battery level is low, charge it 2h each time.
- When the power LED flashes, it indicates the battery level is low, please charge it in time.
- During charging the light will stay on, until it is full charged, it goes off.

Trouble Shooting And Cleaning

Trouble Shooting


1. Make sure the power is turned on.

2. Ensure the keyboard is in range of 10 meters from your device.
3. Make sure the keyboard has enough power.
4. Make sure the Bluetooth is turned on.
5. Make sure the keyboard is successfully paired to your device.
6. If the pairing between keyboard and your device failed, do the following steps:
 - Delete all the history Bluetooth devices in your device.
 - Shut the Bluetooth in your device.
 - Reboot your device and it's Bluetooth.
 - Reconnect the keyboard with your device.

Cleaning

1. Pedit, wipe it with a tower dipped the ite water on bore station alcohol, pease keep the keyboard dry.
 2. Do not use high-concentration alcohol or disinfectant for cleaning to avoid corrosion of the product.
-

Documents / Resources

	<p>TAIYANG B09SV45QWF Smart Keyboard for Samsung Galaxy Tab [pdf] User Guide B09SV45QWF Smart Keyboard for Samsung Galaxy Tab, B09SV45QWF, Smart Keyboard for Samsung Galaxy Tab, Keyboard for Samsung Galaxy Tab, Smart Keyboard, Keyboard</p>
---	---

References

- [User Manual](#)