



tecno switch Aluminium Key Selector with Push Button and Unlocking Handle Installation Guide



[Home](#) » [tecno switch](#) » tecno switch Aluminium Key Selector with Push Button and Unlocking Handle Installation Guide 



Aluminium Key Selector with Push Button and Unlocking Handle
Installation Guide



ALUMINIUM KEY SELECTOR WITH PUSH BUTTON AND UNLOCKING HANDLE



Contents

- [1 Aluminium Key Selector with Push Button and Unlocking Handle](#)
- [2 INSTALLATION](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

Aluminium Key Selector with Push Button and Unlocking Handle

230 Vac – 50/60 Hz

Rated current 16 A

Two positions switch (up/down)

On wall installation

Two keys supplied

Faston terminals connections

Unlocking the handle for manual actuation of the motorized damper

INSTALLATION

- Drill three fixing holes to install the device on the wall, using it as a hole guide. (Fig.1)
- Remove the switch (Fig. 2), arrange the electric cables and unlock the cable inside the selector, then fix it to the wall.
- Make the electrical connections as shown in Fig.3, then fix the switch previously removed.

CONNECTING BRAKE UNLOCK CABLE: Insert unlock cable in the proper input (Fig. 1 and 2), pass the metal cable through the slot in the lever, and position it in its seat. Insert the stopper at the cable, placing it close to the lever and tightening it with an 8mm wrench (Fig. 2). Put the metal cable in tension, acting on the adjustment screw located on the bottom of the motor reducer. Pull the lever and move the damper manually to verify that the motor reducer is unlocked, if not, make the adjustments again. Make sure that it has been tightened firmly and cut off any excess cable (Fig.2).

Fig.1

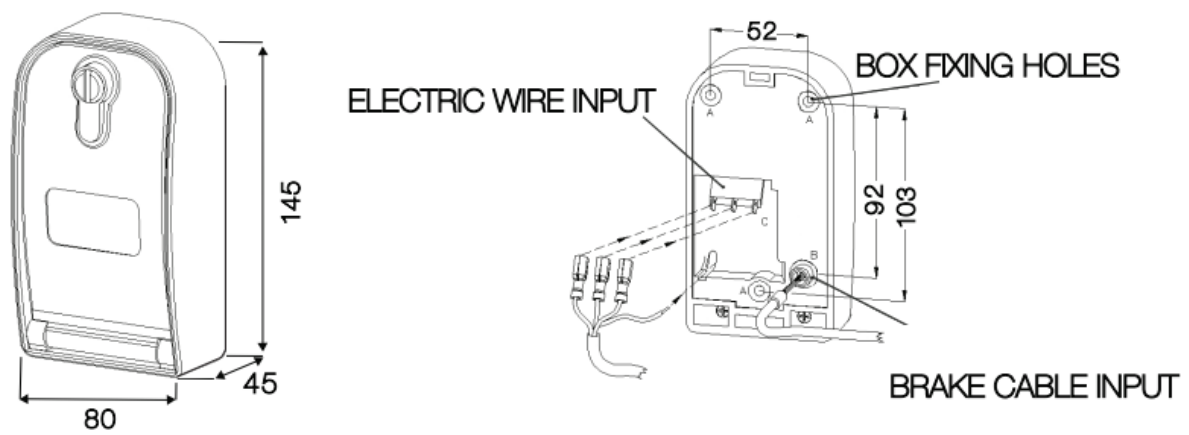


Fig.2


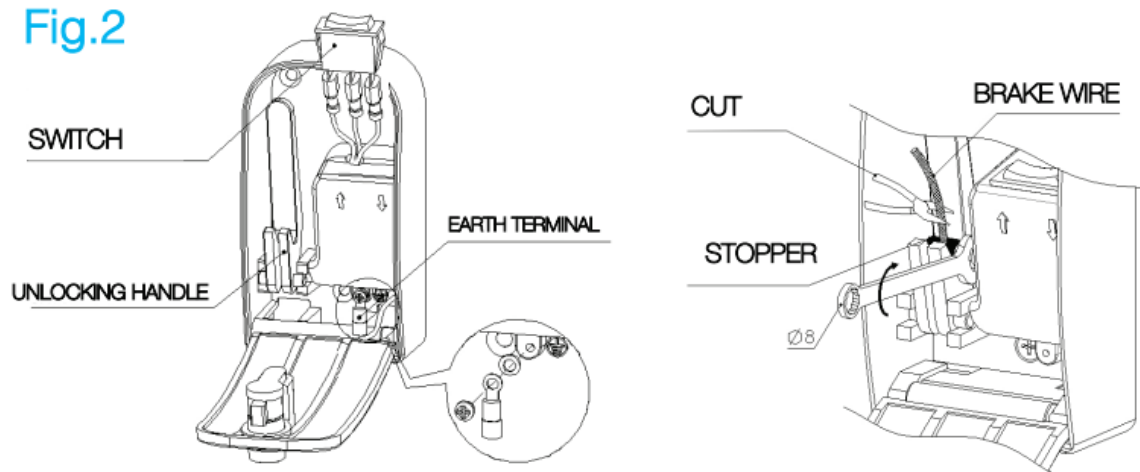


Fig.3



CODICE	TENSIONE DI LAVORO	CORRENTE NOMINALE	PESO
CCDE	RATED VOLTAGE	RATED CURRENT	WEIGHT
SL003LV	Vac 230	A 16	g 620


tecnoswitch 

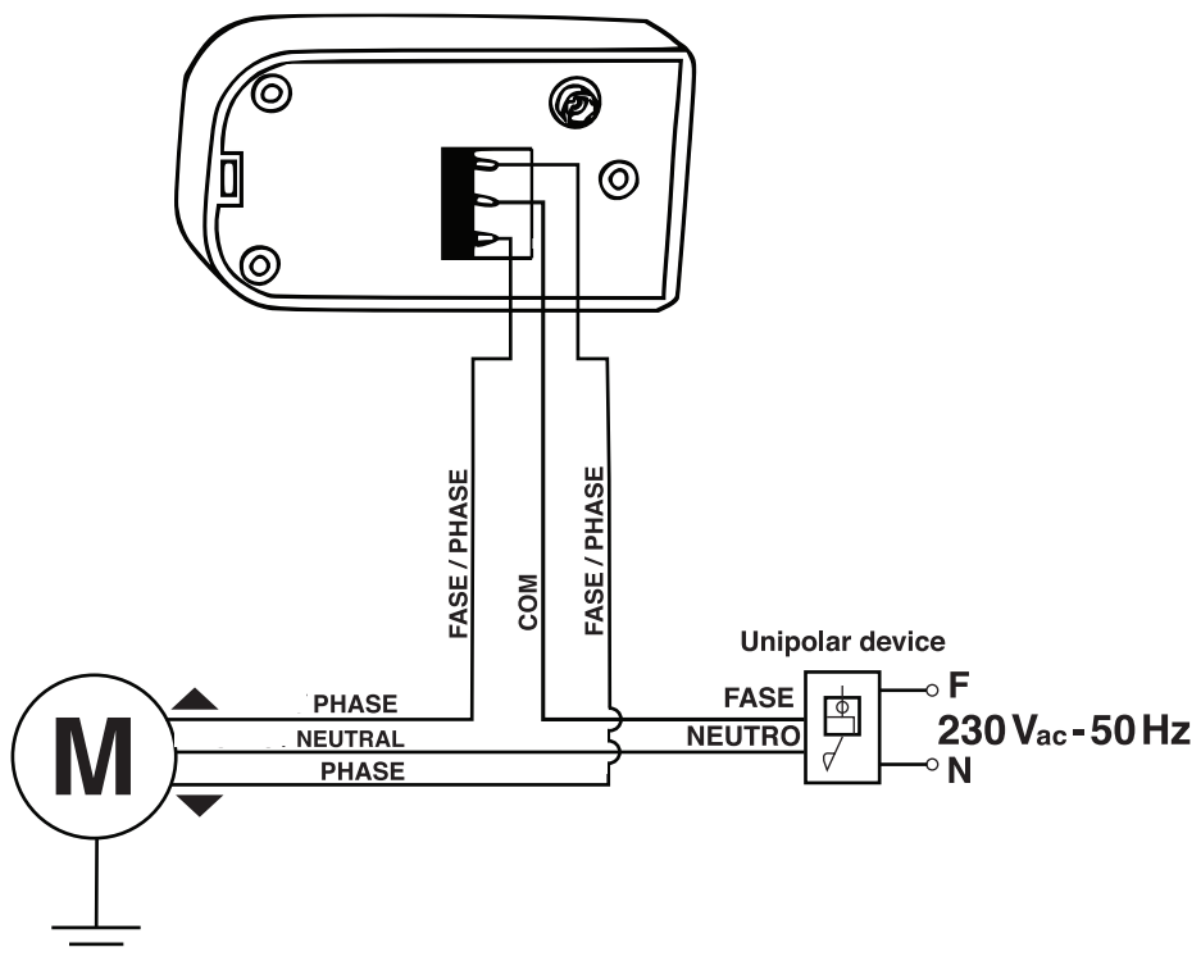

tecnoswitch.com

Via P. Leone Dehan, 99/105 · 76123 Andria (BT) ITALY area led .it
tel (+39) 0883 555323 · fax (+39) 0883 555323

Documents / Resources

	<p>tecno switch Aluminium Key Selector with Push Button and Unlocking Handle [pdf] Installation Guide</p> <p>Aluminium Key Selector with Push Button and Unlocking Handle, Aluminium Key Selector Unlocking Handle, with Push Button and Unlocking Handle, Unlocking Handle, Push Button Unlocking Handle</p>
---	---

[Manuals+](#)