

TOPP PRO dio24 Firmware Update Software PC User Manual

TOPP PRO dio24 Firmware Update Software PC User Manual



Contents

- [1 Software Overview](#)
- [2 Preparation'](#)
- [3 Operating Instructions](#)
- [4 Connections](#)
- [5 Start of Update](#)
- [6 Documents / Resources](#)

Software Overview

This software is mainly used for updating DIO24 devices.

Preparation'

1. PC with Windows 7 or more
2. DIO24 Digital Snake 3 4. 5
3. A wireless router
4. 2 network cables
5. DIO24 fimware upgrade software

Operating Instructions

1. Digital Snake DIO24



2. Computer



3. Wireless Router



4. UTP Cable



5. USB Serial Cable




Connections

This digital snake can be updated via 2 different connection methods.

DIO24 and Computer Wired


Connect the computer LAN port to one port of the Router and the DIO24 Ethernet port to another port of the Router (as shown below) The computer and DIO24 are connected to the same router,

NOTE: The computer cannot be directly connected to the DIO24 through the network cable,

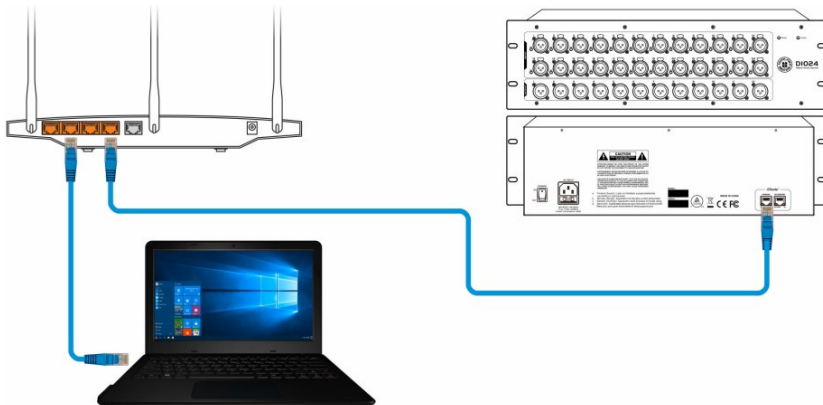

DIO24 and Computer Wireless


Connect the DIO24 Ethernet port to a Router's port. Then find the name network that corresponds to the Router you are using with the computer's wireless system and connect via Wi-Fi. That way the computer will see the DIO24

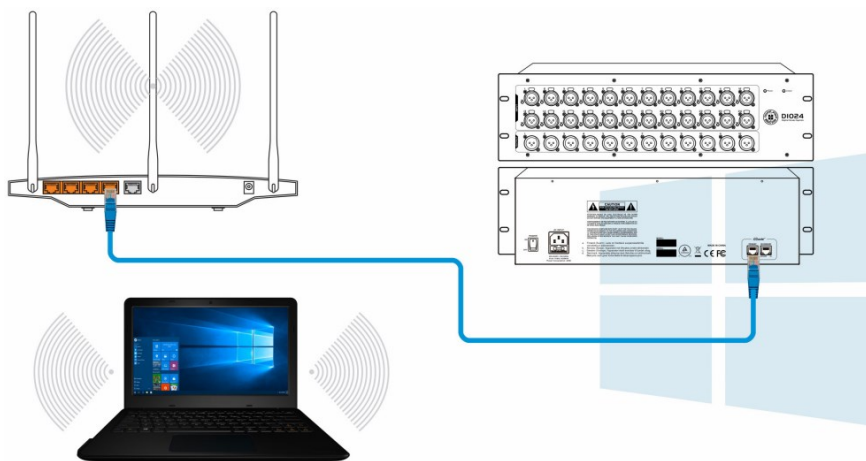


Start of Update

To start the update procedure, the update software “DIO24 Firmware Utility” must be downloaded and installed on the computer, which can be obtained on the website: www.topppro.com in the mixer section.


After the software is installed, double click “DIO24 Firmware Utility” to open it and enter the following interface, as shown: Network Interface Configure

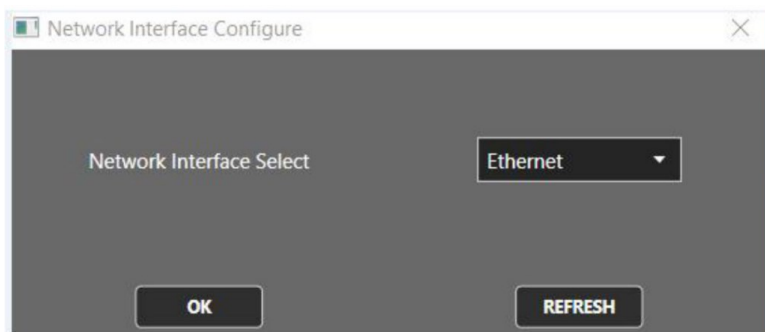


Click the “Scan” button to search for the device:

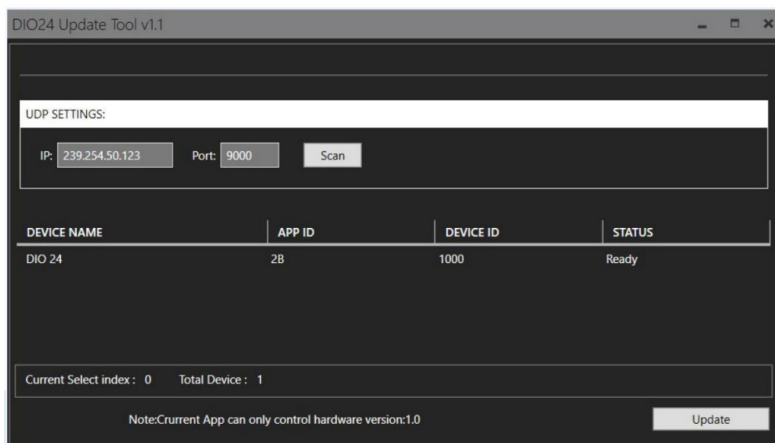


Select the device and click “Update” button to enter at this interface:

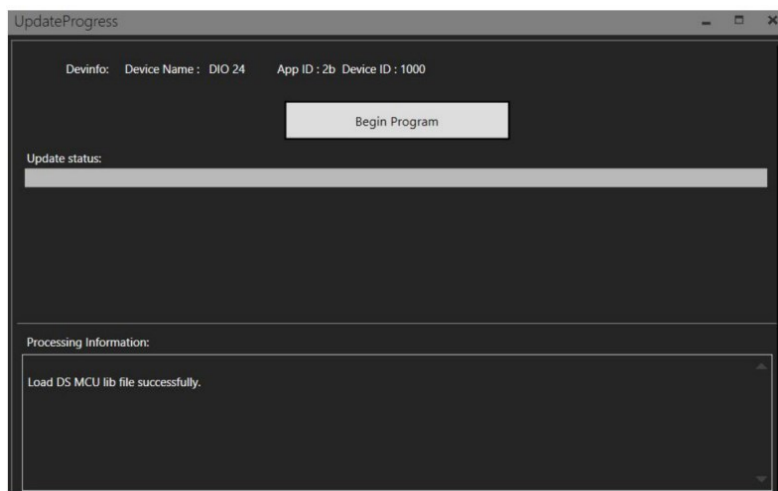

Click “Begin Program” to start the update. Then click “Yes” if you are sure to start or click “No” if you want to exit the update interface.

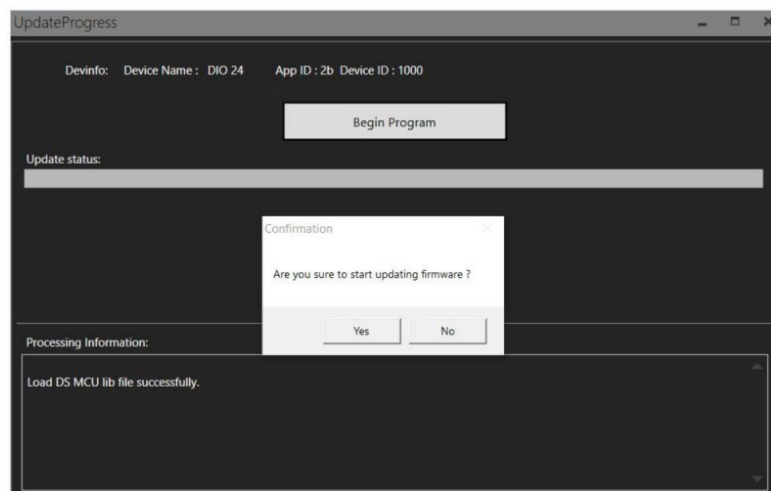

Please wait for the update to complete. If the updated device is a host or an extension, it will enter the DSP update. This process is fully automated, please wait a moment.

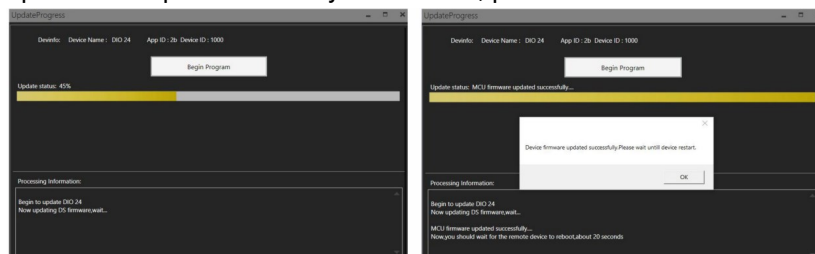


When the update is complete, you can close the update software, then wait for the DIO24 device to reboot.

NOTE: All information about the Digital Snake DIO24 software including these instructions, user manual and software can be found at: WWW.TOPPPro.com



Documents / Resources



[TOPP PRO dio24 Firmware Update Software PC](#) [pdf] User Manual
dio24 Firmware Update Software PC, dio24, Firmware Update Software PC, Update Software P
C, Software PC, PC