



# twinkly Generation II Dots 10 Foot Multicolor Smart LED Light String Instruction Manual

[Home](#) » [Twinkly](#) » twinkly Generation II Dots 10 Foot Multicolor Smart LED Light String Instruction Manual

## Contents [ [hide](#) ]

- 1 twinkly Generation II Dots 10 Foot Multicolor Smart LED Light String
- 2 Use and care instructions
- 3 Technical Specifications
- 4 physical setup
- 5 controller
- 6 app download
- 7 setup twinkly
- 8 connection modes
- 9 mapping
- 10 mapping tips
- 11 troubleshooting
- 12 reset twinkly
- 13 online manual
- 14 Documents / Resources
  - 14.1 References
- 15 Related Posts



**twinkly Generation II Dots 10 Foot Multicolor Smart LED Light String**



Read and follow all safety instructions.

1. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.
2. Do not use seasonal products outdoors unless marked as suitable for indoor and outdoor use. When products are used in outdoor applications, connect the product to a Ground Fault Circuit Interrupting (GFCI) outlet. If one is not provided, contact a qualified electrician for proper installation.
3. This seasonal use product is not intended for permanent installation or use.
4. Do not mount or place near gas or electric heaters, fireplaces, candles, or other similar sources of heat.
5. Do not secure the wiring of the product with staples or nails, or place on sharp hooks or nails.
6. Do not let lamps rest on the supply cord or on any wire.
7. Unplug the product when leaving the house, or when retiring for the night, or if left unattended.
8. This is an electric product — not a toy! To avoid the risk of fire, burns, personal injury, and electric shock it should not be played with or placed where small children can reach it.
9. Do not use this product for other than its intended use.
10. Do not hang ornaments or other objects from the cord, wire, or light string.
11. Do not cover the product with cloth, paper, or any material not part of the product when in use.  
Do not close doors or windows on the product or extension cords as this may damage the wire insulation.
12. Read and follow all instructions that are on the product or provided with the product.
13. SAVE THESE INSTRUCTIONS.
14. Do not connect the chain to the supply while it is in the packing.
15. Where breakage or damage to lamps occurs the chain must not be used/energized but disposed of safely.
16. The lamps are not replaceable.
17. WARNING – RISK OF ELECTRIC SHOCK IF LAMPS ARE BROKEN OR MISSING. DO NOT USE.

## Use and care instructions

- When the product is placed on a live tree, the tree should be well-maintained and fresh. Do not place on live trees in which the needles are brown or break off easily. Keep the live tree holder filled with water.
- If the product is placed on a tree, the tree should be well-secured and stable.
- Before using or reusing, inspect the product carefully. Discard any products that have cut, damaged, or frayed

- wire insulation or cords, cracks in the lamp holders or enclosures, loose connections, or exposed copper wire.
- When storing the product, carefully remove the product from wherever it is placed, including trees, branches, or bushes, to avoid any undue strain or stress on the product conductors, connections, and wires.
- When not in use, store neatly in a cool, dry location protected from sunlight.

**WARNING** – To reduce the risk of fire and electric shock:

- Do not install on trees having needles, leaves or branch coverings of metal or materials which look like metal.
- Do not mount or support wires in a manner that can cut or damage wire insulation.

**Class A Disclaimer:** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

#### **WARNING!**

Do not connect the light string to the power supply while it is in the packaging. The connecting cable cannot be repaired or replaced. **THE LAMPS ARE NOT REPLACEABLE.** The lighting chain must not be used without all gaskets being in place. Lighting chains don't intend for interconnection. Do not connect this light string electrically to devices from another manufacturer.

**CAUTION!** Strangulation hazard. Keep out of reach of young children. The crossed-out wheeled bin symbol indicates that the item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal.

The manufacturer, Leadworks Srl, declares that this device complies with the (LVD) 2014/35/EU, (RED) 2014/53/EU, (EMC) 2014/30/EU, (RoHS) 2011/65/EU, (REACH) 1907/2006 directives. The full text of the EU declaration of conformity is available at the following Internet address: [www.twinkly.com/certifications](http://www.twinkly.com/certifications)

#### **System Requirement**

The minimum system requirement for mobile phones are iOS 11 and Android 5 Check the app store for the latest update to ensure the best performance.

#### **Technical Specifications**


- Power supply: see label
- IP protection: IP44
- Premium grade LED diodes
- To ensure high color rendering, Twinkly products only use high-quality LEDs.
- Twinkly's RGB and RGB+W products are produced according to quality principles and processes that allow us

to obtain a high degree of primary color purity. The minimum excitation purity values of the Blue, Green, and Red components are shown in the table below.

values apply only to RGB (STP) and RGBW (SPP) products, not AWW (GOP) products


- Operating RF for Wi-Fi / Bluetooth
- Frequency 2402/2480 Mhz
- Max output
- Power <100mW
- values apply only to RGB (STP) and RGBW (SPP)
- products, not AWW (GOP) products
- Color Purity values
- Blue > 90%
- Green > 65%
- Red > 95%

## physical setup

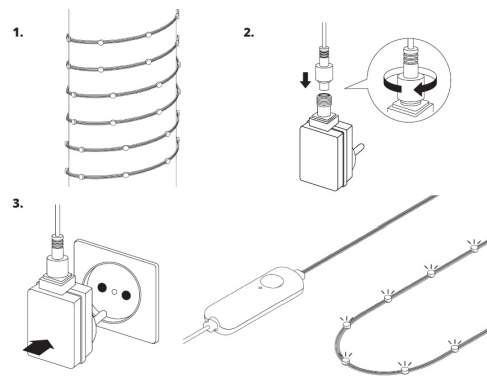

1. Decorate your interiors or spaces with Twinkly Dots
2. Connect the Twinkly Dots to the power adapter.
3. Plug the power adapter into a power socket, and the lights will switch on.

## controller



- CONTINUOUS GREEN: Direct Wi-Fi mode, connected
- FLASHING GREEN: Direct Wi-Fi mode, no device connected
- CONTINUOUS BLUE: Home Wi-Fi network mode, connected


- FLASHING BLUE: Home Wi-Fi network mode, connection in progress
- FLASHING RED: Home Wi-Fi network mode, unable to connect

## app download




**Note:** All app illustrations in this document are a mere representation of the functionality and might vary from the actual app visuals.

## setup twinkly

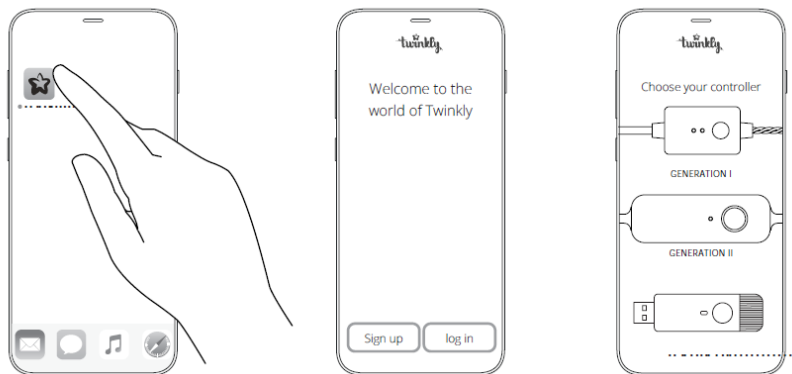

- Launch the Twinkly app.
- Sign up/log in to your account (necessary for using smart home features).
- Follow the setup process on the app.

## connection modes

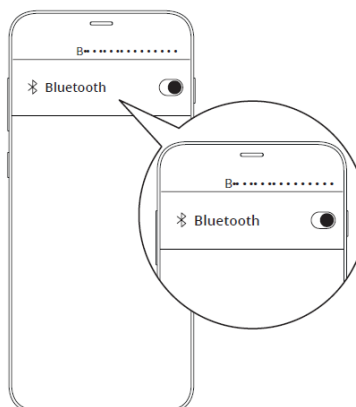


Twinkly uses Bluetooth for the setup process only. A Wi-Fi connection is required for operation. You can use:


- Home Wi-Fi network connection (recommended): Connect with your home/office WiFi from the list of available networks.

- Direct Wi-Fi connection: Select “Twinkly\_xxxxxx” WiFi from the list of available networks. Password: Twinkly2019  
(**NOTE:** the internet on your phone will not be available in this case)



#### HOME WI-FI NETWORK CONNECTION

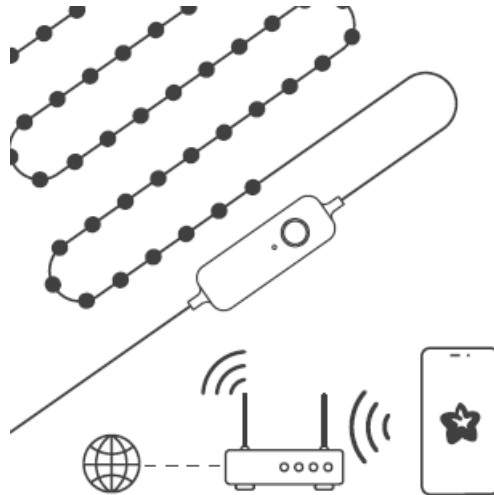


#### DIRECT Wi-Fi CONNECTION

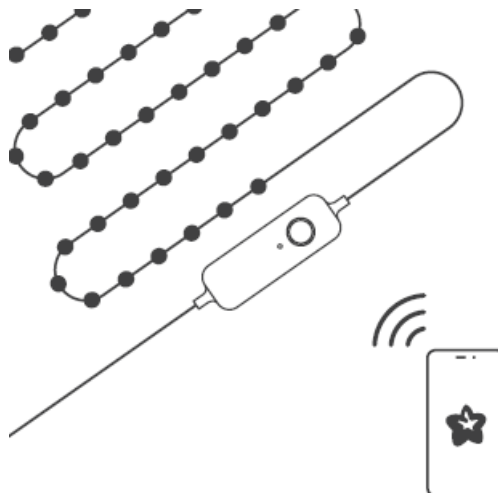

## mapping

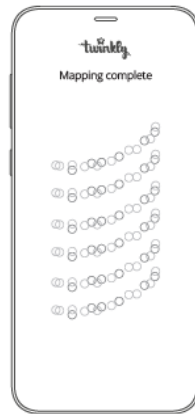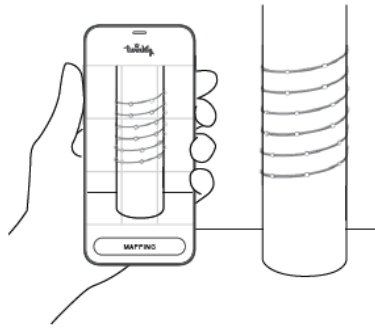

## mapping tips

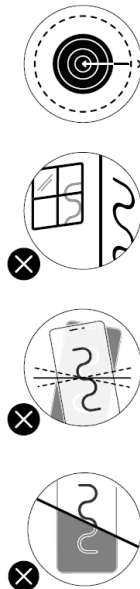

## troubleshooting

### Q THE LIGHTS DO NOT SWITCH ON

- Check that the power adapter is plugged in and that the controller is correctly connected to the device
- Check that the LED status indicator on the controller is lit
- Briefly press the button on the controller
- If this doesn't work, unplug the power adapter, wait 30 seconds, and plug in again

### Q THE LIGHTS ARE TURNED ON BUT ARE BLOCKED

- Briefly press the button on the controller
- If this does not work, unplug the power adapter, wait 30 seconds and plug it in again

### Q THE LED INDICATOR IS LIGHT BLUE, BUT MY SMARTPHONE CAN NOT FIND TWINKLY

- Unplug the power adapter, wait 30 seconds, plug it in again, and repeat the Configuration procedure
- If this does not work, try to Reset (see Reset procedure below)
- If this won't work, see the online reference manual [help.twinkly.com](http://help.twinkly.com)


### Q HOW CAN I CONNECT TO TWINKLY WITHOUT A HOME WI-FI NETWORK?

- Open Wi-Fi settings on your smartphone
- Find and select the "Twinkly\_XXXXXX" network
- Enter the Wi-Fi password " Twinkly2019 " and ensure that the "Twinkly\_XXXXXX" network is connected

### Q TWINKLY SETUP WAS SUCCESSFUL, BUT THE LIGHTS DON'T RESPOND TO COMMANDS

- Within the Twinkly application, open "Devices" and check that the Twinkly device is selected
- If this does not work, stop the Twinkly application and launch it again
- If this does not work, try to Reset (see Reset procedure below)
- If this does not work, delete the Twinkly application from your smartphone, then download the latest version from AppStore or Google Play Store
- If you have any problems, please write to [support@twinkly.com](mailto:support@twinkly.com)

### reset twinkly

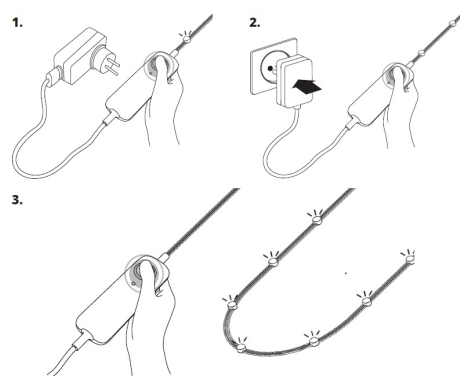

1. Unplug Twinkly from the power socket. Press and hold the controller button.
2. While holding the button, plug in Twinkly.
3. Keep holding the button until all LEDs turn red (or amber for Gold Edition), then release the button.






- Browse, play and edit effects.
- Create new effects.
- Group multiple devices together.
- Synchronize with music.




- Download new effects.
- Control with Smart Home Assistant.

[help.twinkly.com](https://help.twinkly.com)

## Documents / Resources

	<p><a href="#">twinkly Generation II Dots 10 Foot Multicolor Smart LED Light String</a> [pdf] Instruction Manual</p> <p>Generation II Dots 10 Foot Multicolor Smart LED Light String, Generation II Dots, 10 Foot Multicolor Smart LED Light String, Multicolor Smart LED Light String, LED Light String, Smart LED Light String, Smart LED, LED Light, Light</p>
---	---

## References

-  [Twinkly Help Center](#)
-  [Twinkly](#)

