




## ULINE Rectangular Picnic Table Instructions

[Home](#) » [ULINE](#) » ULINE Rectangular Picnic Table Instructions 

# ULINE

H-2561 H-2562  
RECTANGULAR PICNIC TABLE

1-800-295-5510  
[uline.com](http://uline.com)

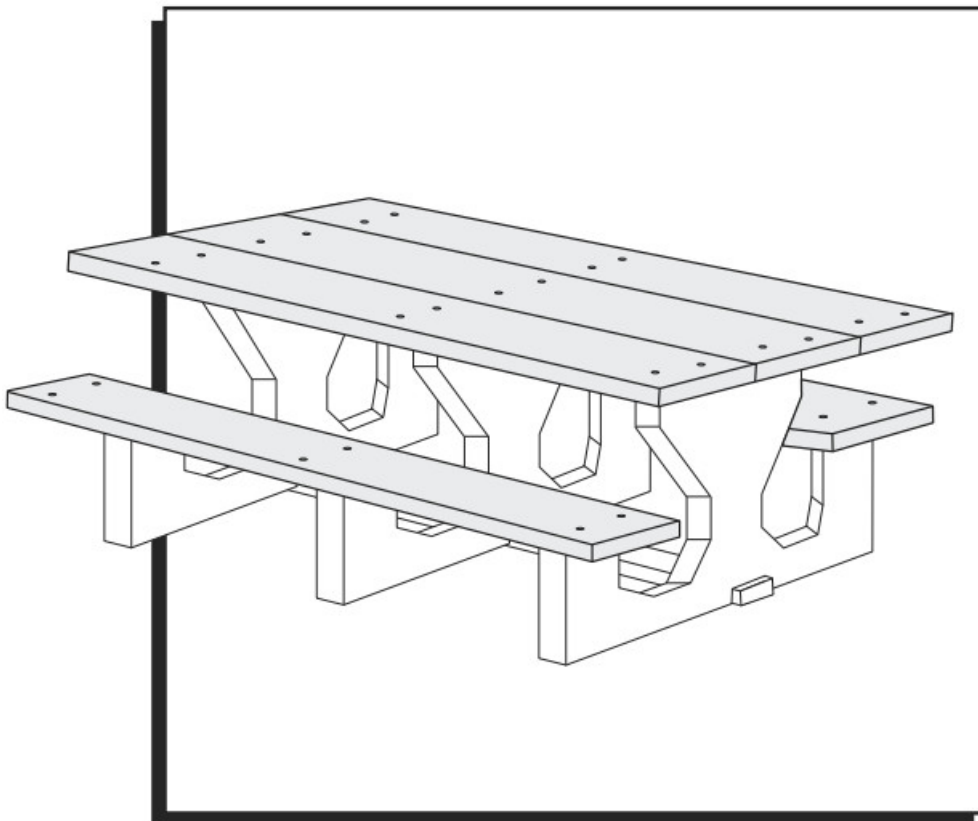

## Contents

[1 TOOLS NEEDED](#)

[2 PARTS](#)

[3 ASSEMBLY](#)

[4 ASSEMBLY](#)

[CONTINUED](#)


[5 Documents / Resources](#)

[6 Related Posts](#)

## TOOLS NEEDED



3/4" (19 mm) Socket Bit



3/8" (10 mm) Drill Bit (Included)



Tape Measure



Power Drill




Two Person Assembly  
(Optional)

## PARTS




Base Support Board x 1

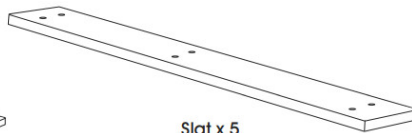

Slat x 5




Washer x 3



Plastic Base x 3



4" Lag Screw x 30



3 1/2" Lag Screw x 3

## ASSEMBLY




**NOTE:** It is important to keep lag screws loose throughout the assembly. Tighten during step 8.




**WARNING!** Do not lean on tabletop or seats when assembling.

1. Verify all parts are present before beginning.
2. Place the three plastic bases on a flat level surface using the base support board to keep them straight. You will attach this board in step 7. (See Figure 1)

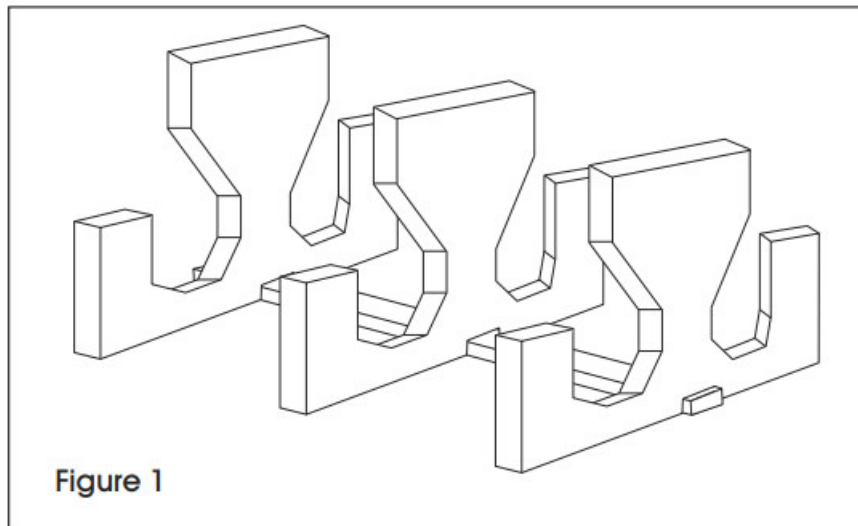


## ASSEMBLY CONTINUED

3. Place one table slat on each side of the plastic base (seat area). Pre-drill the end holes on the slats using the power drill and 3/8" drill bit. Loosely attach slats to the plastic base using 4" lag screws, power drill and 3/4" socket bit (will tighten later in step 8). (See Figure 2)

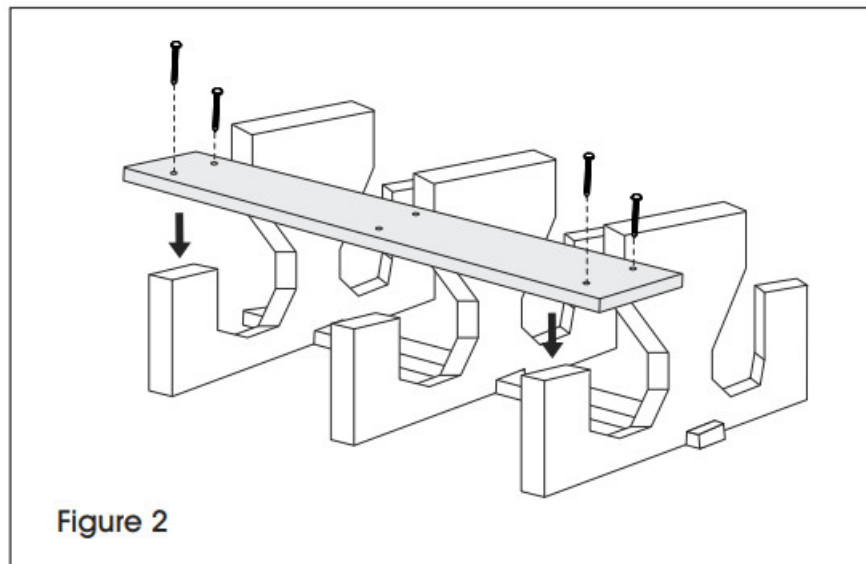


4. Pre-drill center holes on the slats using the power drill and 3/8" drill bit. Loosely attach slats to plastic bases using the 4" lag screws, power drill and 3/4" socket bit (will tighten later in step 8). ( See Figure 3)

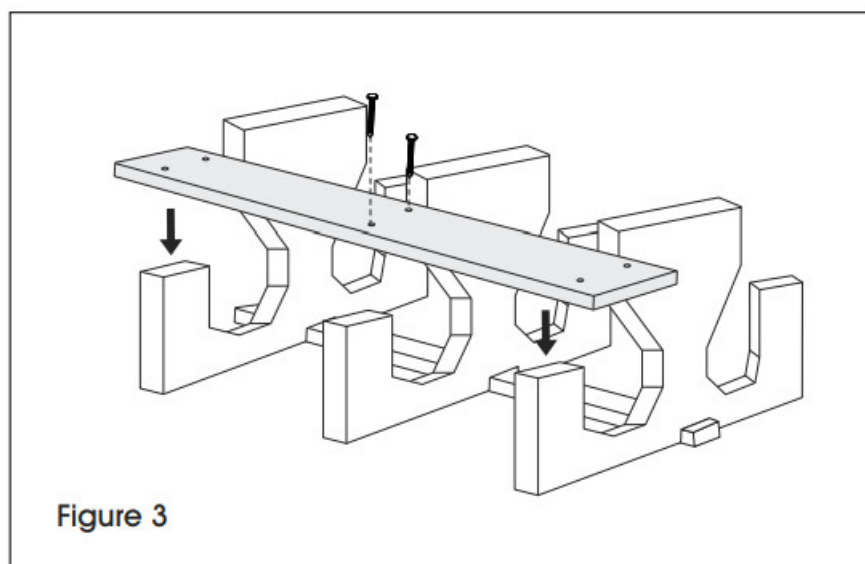

5. Determine the spacing for the slats on the tabletop. Pre-drill holes on the slats using the power drill and 3/8"

socket bit. Loosely attach slats to the plastic base using 4" lag screws, power drill and 3/4" socket bit (will tighten later in step 8). (See Figure 4)

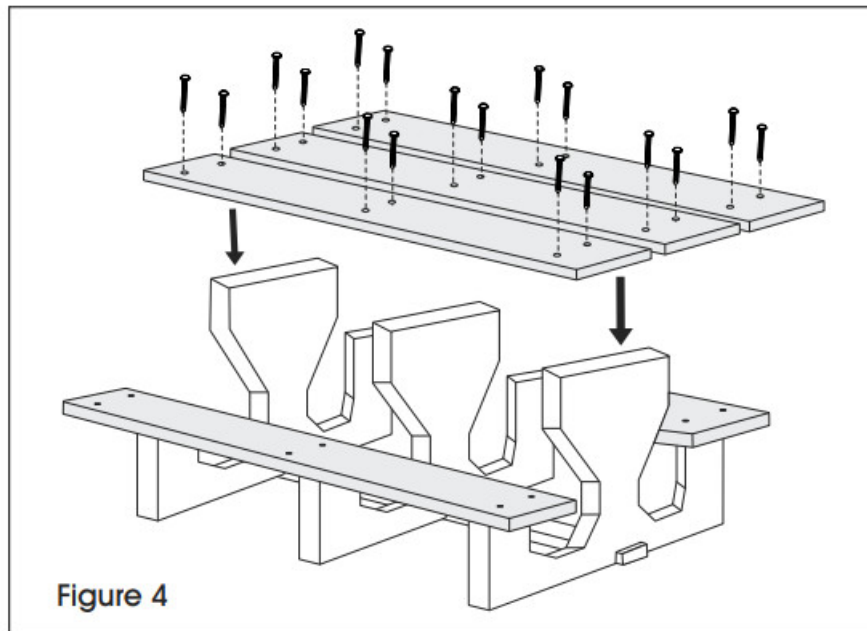


6. Turn table upside down.



**CAUTION! Due to the weight of the table, seek assistance to turn table upside down.**

7. Attach base support board into the indent in the plastic base bottom using the 3 1/2" lag screws, washer, power drill, and 3/4" socket bit. (See Figure 5)

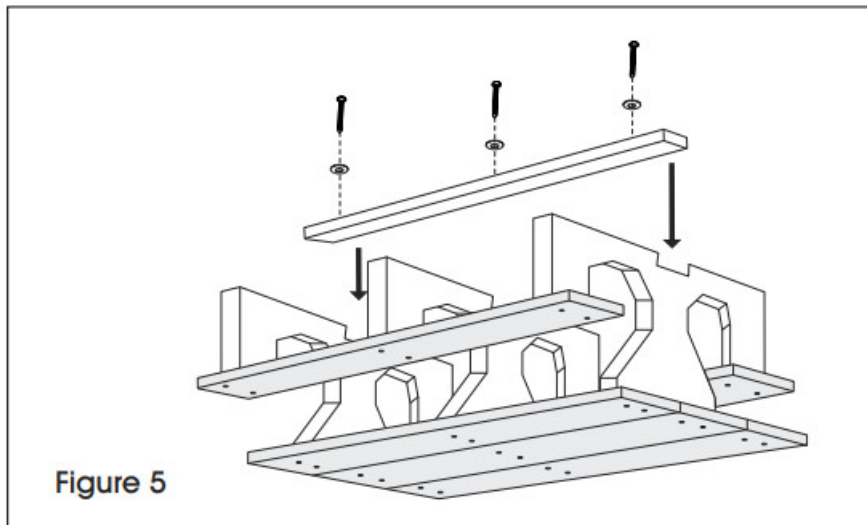

8. Turntable right side up. Make sure the table is square and tighten all lag screws. NOTE: H-2565 Mounting hardware sold separately.


# ULINE

1-800-295-5510

[uline.com](http://uline.com)

0721 IH-2561

Documents / Resources

|  |   |
|--|---|
|  The diagram shows the assembly steps for a ULINE Rectangular Picnic Table. It includes a title 'ULINE H-2561 H-2562 RECTANGULAR PICNIC TABLE', a list of 'TOOLS REQUIRED' (screwdriver, wrench, Allen key), and a list of 'PARTS' (table top, legs, brackets, screws, washers, nuts, Allen keys). The assembly steps are numbered 1 through 6, showing the process of attaching the legs to the table top using the provided hardware. | <p><a href="#">ULINE Rectangular Picnic Table</a> [pdf] Instructions</p> <p>ULINE, H-2561, H-2562, Rectangular Picnic Table</p> |
|--|---|

[Manuals+](#)