


V I V O MOUNT-VP01B Adjustable Ceiling Mount for Regular and Mini Projectors Instruction Manual

Home » VIVO » VIVO MOUNT-VP01B Adjustable Ceiling Mount for Regular and Mini Projectors Instruction

Manual



Black Projector Ceiling Mount SKU: MOUNT-VP01B Instruction Manual

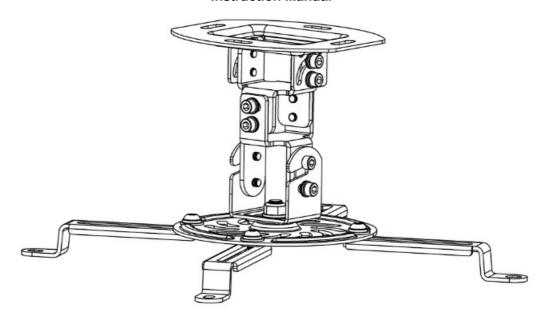

We're Here for You!

Our customer-minded support team is here for YOU, Monday-Friday 7am-7pm CST.

We offer immediate assistance with rapid response times from customer service agents and product technicans to help you every step of the way!



If any parts are received damaged / defective OR you are missing a part, please reach out to us within 30 days of product delivery to have it replaced at no cost.

We are happy to replace parts to ensure you have a fully functioning product

Contents

- 1 PRE-ASSEMBLY | BEFORE YOU **BEGIN**
- **2 PACKAGE CONTENTS**
- **3 ASSEMBLY STEPS**
- **4 MINI PROJECTORS**
- **5 STANDARD PROJECTORS**
- 6 Documents / Resources
 - **6.1 References**

PRE-ASSEMBLY | BEFORE YOU BEGIN

If you do not understand these directions, or if you have any doubts about the safety of the installation, please call a qualified technician. Check carefully to make sure there are no missing or defective parts. Improper installation may cause damage or serious injury. Do not use this product for any purpose that is not explicitly specified in this manual. Do not exceed weight capacity. We cannot be liable for damage or injury caused by improper mounting, incorrect assembly or inappropriate use.

WARNING: CHOKING HAZARD

SMALL PARTS - NOT FOR CHILDREN UNDER 3 YEARS. ADULT SUPERVISION IS REQUIRED.

TIPOVER WARNING

SERIOUS OR FATAL CRUSHING INJURIES CAN OCCUR FROM TIPOVER. TO HELP PREVENT TIPOVER:

- NEVER ALLOW CHILDREN TO CLIMB, STAND, HANG, OR PLAY ON ANY PART OF TV OR TV CART.
- USE TIPOVER RESTRAINT OR ANCHOR STAND TO WALL

USE OF TIPOVER RESTRAINTS MAY ONLY REDUCE, BUT NOT ELIMINATE RISK OF TIPOVER.



(13.61kg) WEIGHT CAPACITY

DO NOT EXCEED WEIGHT CAPACITY. Failure to do so may result in serious injury.



Product Warranty

For the most up to date details on your product's warranty, please visit the product's listing on our website or reach out to customer support.

vivo-us.com/products/mount-vp01b



Returns | Product Didn't Work Out?


We offer a hassle-free 30 day return on all products. Contact customer support at 309-278-5303 or help@vivous.com. Please note: For items ordered in error or no longer needed, the return shipping charges will be at the buyer's expense.

TOOLS NEEDED:



PACKAGE CONTENTS

Please consult the parts list below and ensure you have everything you need to assemble your product. If parts are missing or damaged, please contact us.

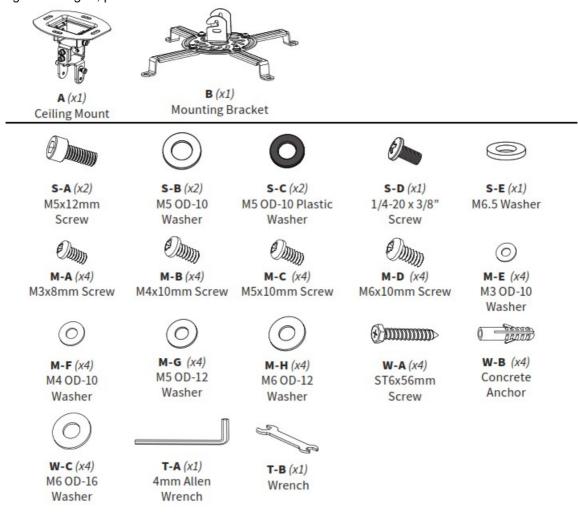

WASHER SPECIFICATION KEY	
M	Compatible Screw Size
OD	Outside Diameter

NOTE: SOME HARDWARE INCLUDED MAY NOT BE USED



CAUTION!


DO NOT INSTALL INTO DRYWALL ALONE. VERIFY YOUR CEILING CONSTRUCTION. USE WOOD STUDS TO MOUNT. We include mounting for brick and concrete If unsure, please contact us at vivo-us.com, email at help@vivo-us.com, or call us at 309-278-5303.

ASSEMBLY STEPS


STEP 1:

OPTION A: Above Ceiling Cable Management

If cables will be hidden above the ceiling, route cables through large opening in Ceiling Mount (A).

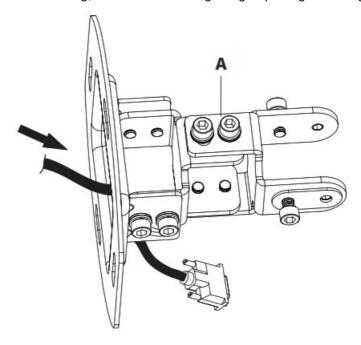

OPTION B: Below Ceiling Cable Management
If cables are located below ceiling, route cables through the side of Ceiling Mount (A).

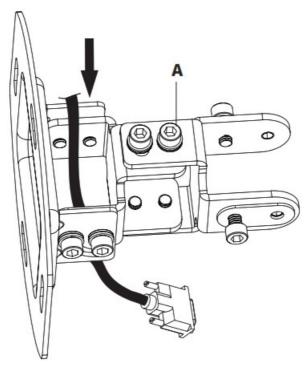




STEP 2: Installing the Ceiling Mount


OPTION A: Wood Ceiling Joist Installation

Align holes in Ceiling Mount (A) with wood ceiling joist and mark drilling locations. Use of a stud finder is recommended for finished ceilings. Drill 55mm (2.2") deep holes using 4.5mm or 3/16" drill bit. Secure Ceiling Mount (A) to stud using ST6x56mm Screws (W-A) with M6 OD-16 Washers (W-C). Do not use Concrete Anchors (W-B).

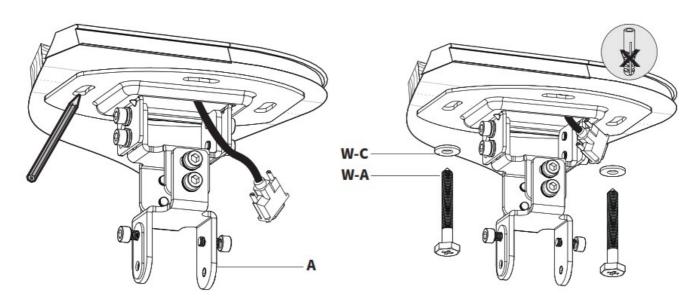

OPTION B: Concrete Ceiling Installation


Mark drilling locations in ceiling. Drill 60mm (2.4") deep holes using 10mm or 3/8" drill bit. Press Concrete Anchors (W-B) into drilled holes, and secure Ceiling Mount (A) to ceiling using ST6x56mm Screws (W-A) and M6 OD-16 Washers (W-C).

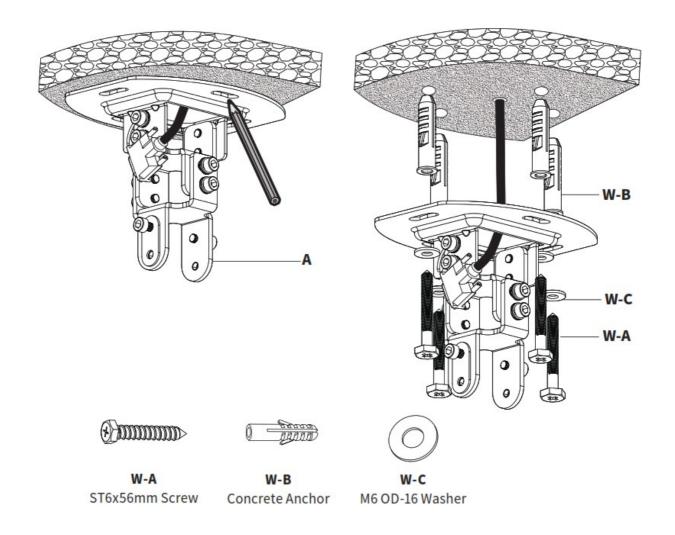

MINI PROJECTORS


STEP 3a: Disassemble Mounting Bracket

Use Wrench (T-B) to loosen nut on Mounting Bracket (B). Separate Mounting Bracket (B), setting aside Mounting Hook (B1) and Small Washer (B2) for use in next step.

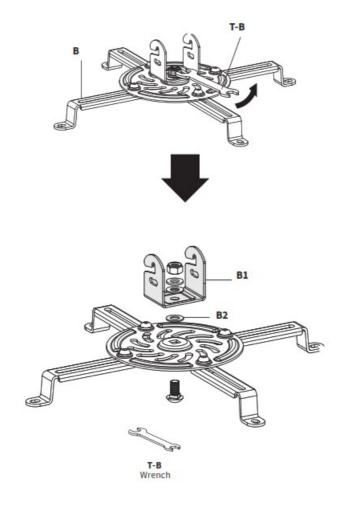

STEP 3b: Securing the Projector


Connect Mounting Hook (B1) to mini projector using 1/4-20 x 3/8" Screw (S-D), M6.5 Washer (S-E), Small Washer (B2) from previous step, and a Phillips screwdriver.

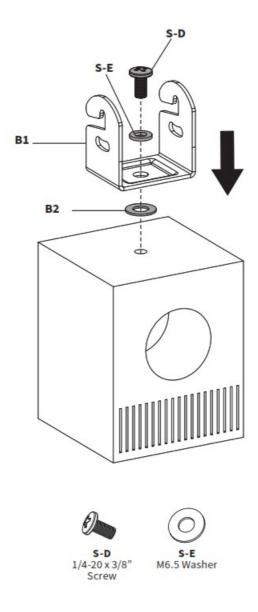

STANDARD PROJECTORS

STEP 3: Securing the Projector


Align arms on Mounting Bracket (B) with mounting holes in projector, and secure to projector using Screws (M-A through M-D) and Washers (M-E through M-H) most appropriate for your projector. If your projector has 3 mounting holes, simply remove one of the arms.

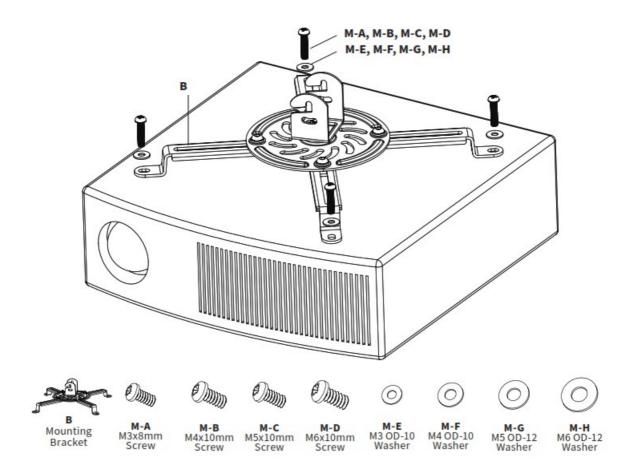

- RESUME NORMAL ASSEMBLY -


STEP 4: Assembling the Mount

Hang Mounting Bracket (B) with projector over pre-installed screws on Ceiling Mount (A), making sure plastic oval washers are between the plate and mount.

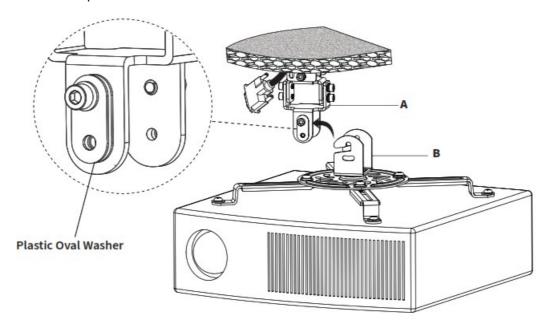


STEP 5: Securing the Mount

Secure Mounting Bracket (B) using M5x12mm Screws (S-A), M5 OD-10 Washers (S-B) and M5 OD-10 Plastic Washers (S-C). Tighten with 4mm Allen Wrench (T-A).

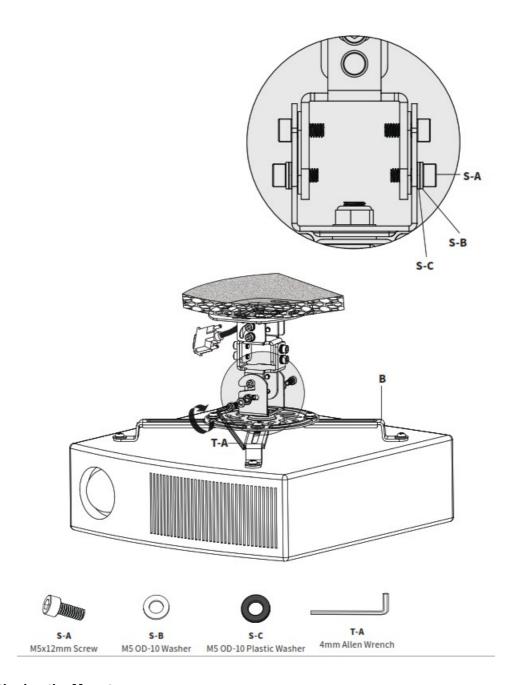


STEP 6: Positioning the Mount Adjust angle and rotation of projector using 4mm Allen Wrench (T-A).

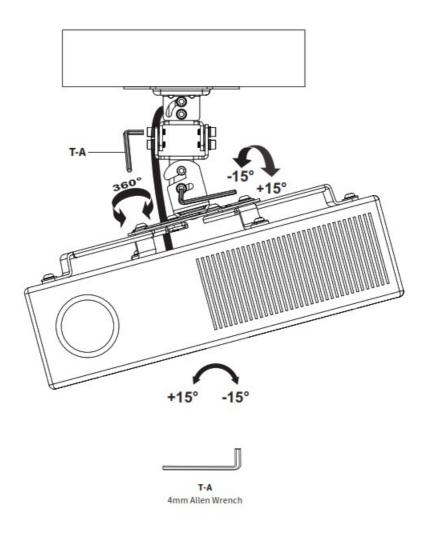

CHECK OUT OTHER GREAT PRODUCTS FROM

EXPLORE MORE AT **VIVO-US.COM**

We offer a wide array of home & office products to fit your needs. From height adjustable desks to monitor mounts to keyboard trays and more!

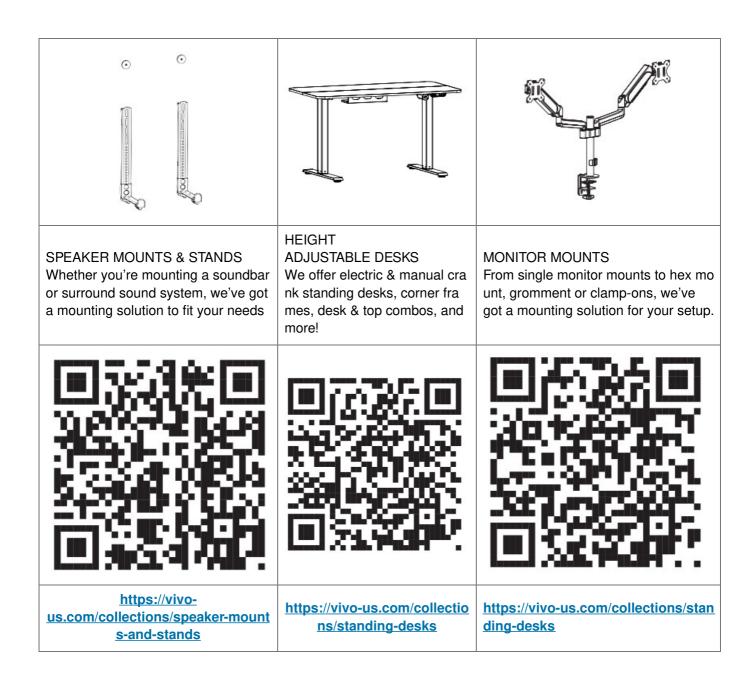

WHO WE ARE

VIVO is more than a brand of ergonomic office furniture. We are a team of creative and innovative indivuduals working together to offer high quality, affordable ergonomic solutions. We think and work outside of the box to serve you, our customer, to the best of our ability.

Need Assistance?



We Would Love to Help!

Personable Customer Support | Mon-Fri 7am-7p

We offer immediate assistance with rapid response times from customer service agents and product technicans to help you every step of the way!

ASSEMBLY VIDEO AVAILABLE:

Follow along step-by-step with our video walk through by scanning the QR code with your mobile device or by following the product link: wivo-us.com/products/mount-vp01b



https://vivo-us.com/products/mount-vp01b

help@vivo-us.com 309-278-5303 www.vivo-us.com

Call Us: 309-278-5303 Average Resolution Time: 5m 4s

Chat Us: <u>www.vivo-us.com</u> Average Resolution Time: < 15m

Email Us: help@vivo-us.com
Average Resolution Time: 1HR 8M

23% within < 15m
38% within < 30m
61% within < 1hr
83% within < 2hr
92% within < 3hr

LOVE YOUR NEW VIVO SETUP?

Ready to share that new amazing setup? Want to brag about that amazing new ergonomic solution? Tag us in your photo!





VIVO-us

@vivo_us

FOR MORE GREAT VIVO PRODUCTS,
CHECK OUT OUR WEBSITE AT: WWW.VIVO-US.COM
LAST UPDATED: 07/27/2022
REV2.1LF

Documents / Resources



VIVO MOUNT-VP01B Adjustable Ceiling Mount for Regular and Mini Projectors [pdf] Inst ruction Manual

MOUNT-VP01B Adjustable Ceiling Mount for Regular and Mini Projectors, MOUNT-VP01B, Adjustable Ceiling Mount for Regular and Mini Projectors, Regular and Mini Projectors, Mini Projectors

References

- Q Register a .US.COM domain today!
- © VIVO Desks, Monitor Mounting, and More Home & Office Solutions VIVO desk solutions, screen mounting, and more
- Adjustable Ceiling Mount for Regular and Mini Projectors VIVO desk solutions, screen mounting,

and more

• © VIVO - Desks, Monitor Mounting, and More Home & Office Solutions - VIVO - desk solutions, screen mounting, and more

Manuals+,