



# V I V O VP02W Universal Extending Ceiling Projector Mount Instruction Manual

[Home](#) » [V I V O](#) » V I V O VP02W Universal Extending Ceiling Projector Mount Instruction Manual 

## Contents

- [1 V I V O VP02W Universal Extending Ceiling Projector Mount](#)
- [2 Product Usage Instructions](#)
- [3 PACKAGE CONTENTS](#)
- [4 TOOLS NEEDED](#)
- [5 ASSEMBLY STEPS](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)
- [7 Related Posts](#)



V I V O VP02W Universal Extending Ceiling Projector Mount



## Specifications

- **Product Name:** White Extending Projector Ceiling Mount
- **SKU:** MOUNT-VP02W
- **Weight Capacity:** 30lbs (13.61kg)
- **Color:** White

## Product Usage Instructions

### Step 1: Cable Installation

**Option A:** Run cables through arm (A). Make sure not to exceed the weight capacity of 30 lbs (13.61kg).

**Option B:** If running cables through the ceiling, pull cables through the top plate of the arm (A).

## **Step 2: Mounting**

### **Option A: Drywall Mounting**

1. Use the top plate of the arm (A) to mark the mounting holes on the ceiling.
2. Using a 3/16 drill bit, drill approximately 2.2 inches into the ceiling stud.
3. Put arm (A) in place and mount it to the pre-drilled holes using bolts (W-A) and washers (W-C).

**Note:** Do not install into drywall alone. Verify your ceiling construction and use wood studs to mount. If unsure, please contact us for assistance.

### **Option B: Concrete/Brick Mounting**

1. Use the top plate of the arm (A) to mark the mounting holes on the ceiling.
2. Using a drill bit, drill approximately 2.4 inches into the ceiling.
3. Use concrete anchors (W-B), bolts (W-A), and washers (W-C) to mount the arm (A).

## **Step 3: Bracket Mounting**

- Mount bracket (B) to arm (A) using spacers (M-L), plates (M-M), bolts (M-I), and washers (M-J, M-K). Tighten using the Allen wrench (T-A).

## **Step 4: Projector Mounting**

- Adjust the arms of the bracket (C) to fit the mounting holes of your projector. Use bolts (M-A, M-B, M-C, M-D) and washers (M-E, M-F, M-G, M-H) depending on the size of the mounting holes in your projector.

## **Step 5: Securing the Mount**

- Hook the mount (B) to the bolts at the bottom of the mount (A). Secure using bolts (M-I) and washers (M-J, M-K). Tighten using the Allen wrench (T-A).

## **Step 6: Adjustments**

- Adjust the height and tilt of the mount using the Allen wrench (T-A).

## **Frequently Asked Questions**

### **Q: Can this mount be used for heavy projectors?**

- **A:** The weight capacity of this mount is 30 lbs (13.61kg). Make sure not to exceed this limit.

**Q: Can I install this mount into drywall alone?**

- **A:** No, it is not recommended to install this mount into drywall alone. Verify your ceiling construction and use wood studs for mounting. If you are unsure, please contact us for assistance.

**Q: What tools do I need for the assembly?**

- **A:** You will need a drill and a Phillips screwdriver for the assembly process.

**Q: How can I contact customer support?**

- **A:** You can reach our dedicated support team by email at [help@vivo-us.com](mailto:help@vivo-us.com), through live chat on our website [www.vivo-us.com](http://www.vivo-us.com), or by calling 309-278-5303.
- Our support team is available Monday-Friday from 7:00 am-7:00 pm CST.


**WARNING!**

- If you do not understand these directions, or if you have any doubts about the safety of the installation, please call a qualified technician.
- Check carefully to make sure there are no missing or defective parts.
- Improper installation may cause damage or serious injury.
- Do not use this product for any purpose that is not explicitly specified in this manual. Do not exceed weight capacity.
- We cannot be liable for damage or injury caused by improper mounting, incorrect assembly, or inappropriate use.

**WARNING: CHOKING HAZARD**

**SMALL PARTS – NOT FOR CHILDREN UNDER 3 YEARS. ADULT SUPERVISION IS REQUIRED.**

**PACKAGE CONTENTS**

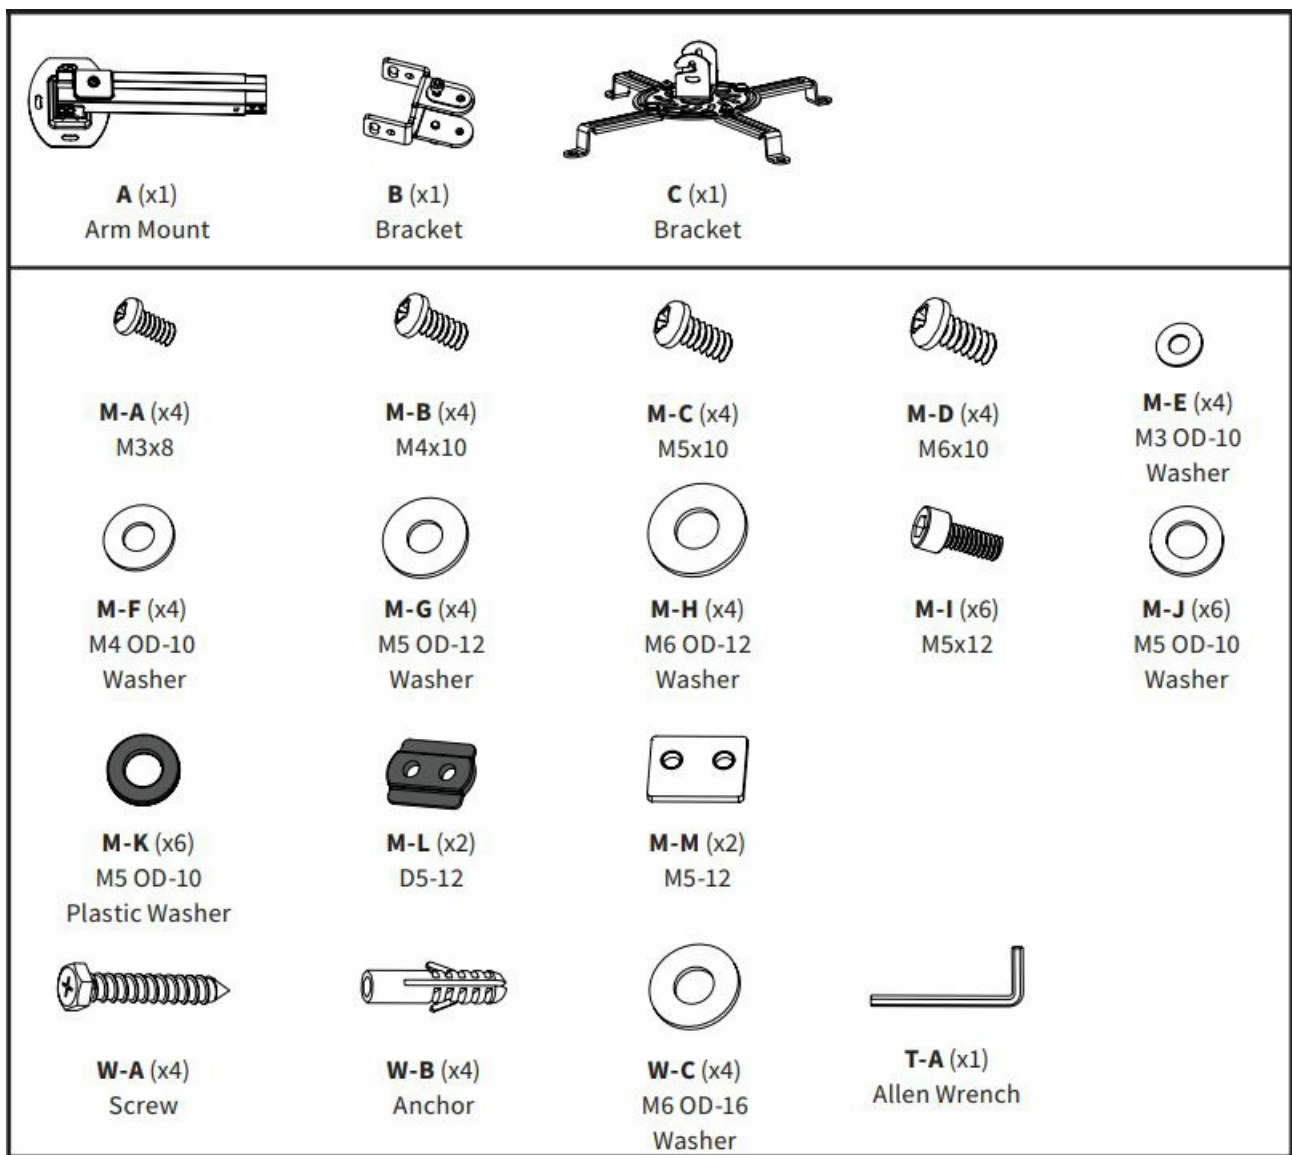


**NOTE:** SOME HARDWARE INCLUDED MAY NOT BE USED

WASHER SPECIFICATION KEY	
<b>M</b>	<b>Compatible Screw Size</b>
<b>OD</b>	<b>Outside Diameter</b>

### CAUTION!

- DO NOT INSTALL INTO DRYWALL ALONE. VERIFY YOUR CEILING CONSTRUCTION. USE WOOD STUDS TO MOUNT.
- We include mounting for brick and concrete.
- If unsure, please contact us at vivo-us.com, email at [help@vivo-us.com](mailto:help@vivo-us.com), or call us at 309-278-5303.

### TOOLS NEEDED

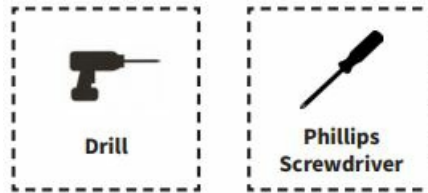


DO NOT EXCEED WEIGHT CAPACITY.  
Failure to do so may result in serious injury.




## ASSEMBLY STEPS

### STEP 1

- **OPTION A:** Run cables through arm (A).

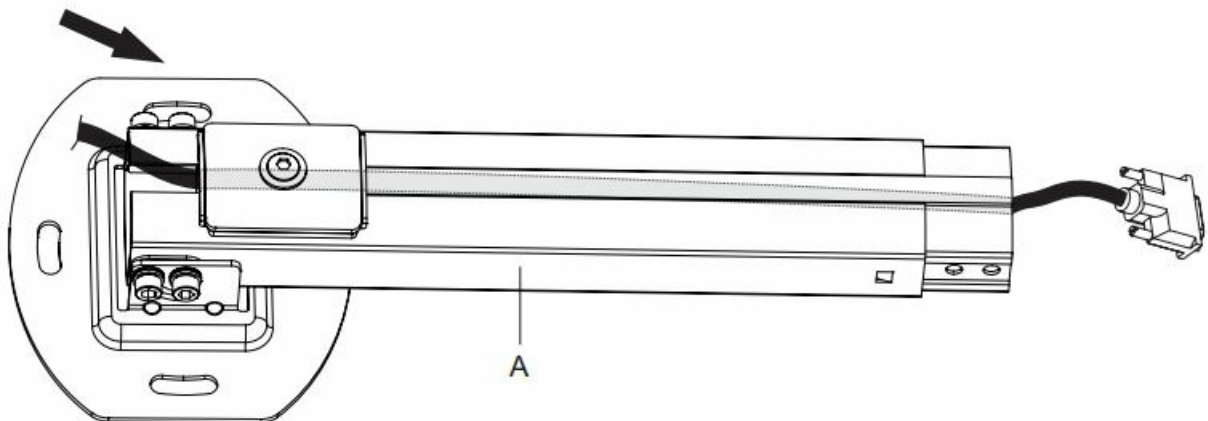


- **OPTION B:** If running cables through the ceiling, pull cables through the top plate of the arm (A).

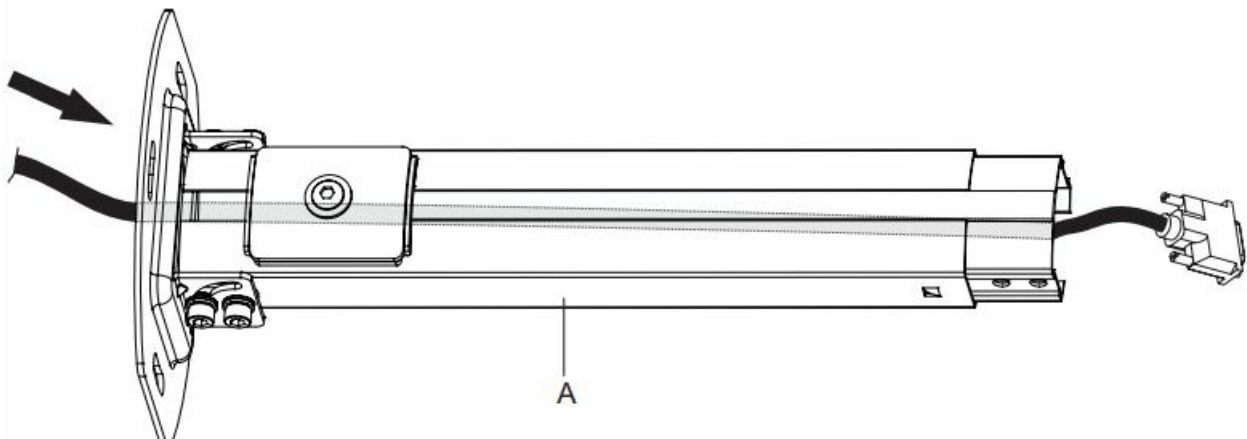


### STEP 2

- **OPTION A: Drywall Mounting** Use the top plate of the arm (A) to mark mounting holes on the ceiling.
- Using a 3/16" drill bit, drill approximately 2.2" into the ceiling stud. Put arm (A) in place and mount it to the pre-drilled holes using bolts (W-A) and washers (W-C) as shown in the diagram.

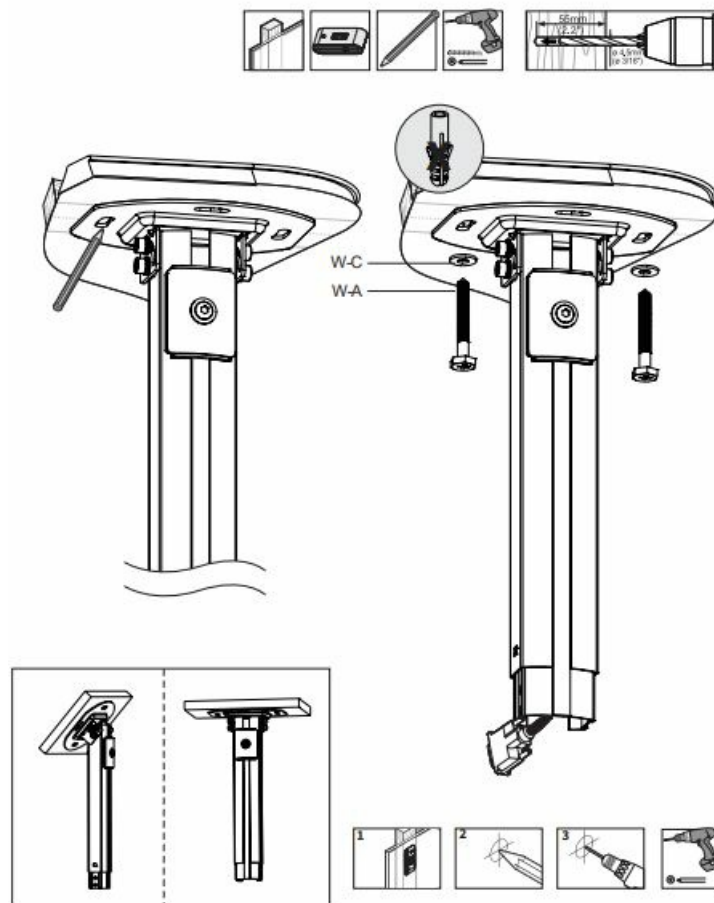


- **OPTION B: Concrete/Brick Mounting** Use the top plate of the arm (A) to mark mounting holes on the ceiling. Using a  $\frac{3}{8}$ " drill bit, drill approximately 2.4" into the ceiling. Use concrete anchors (W-B), bolts (W-A), and washers (W-C) to mount the arm (A) as shown in the diagram.

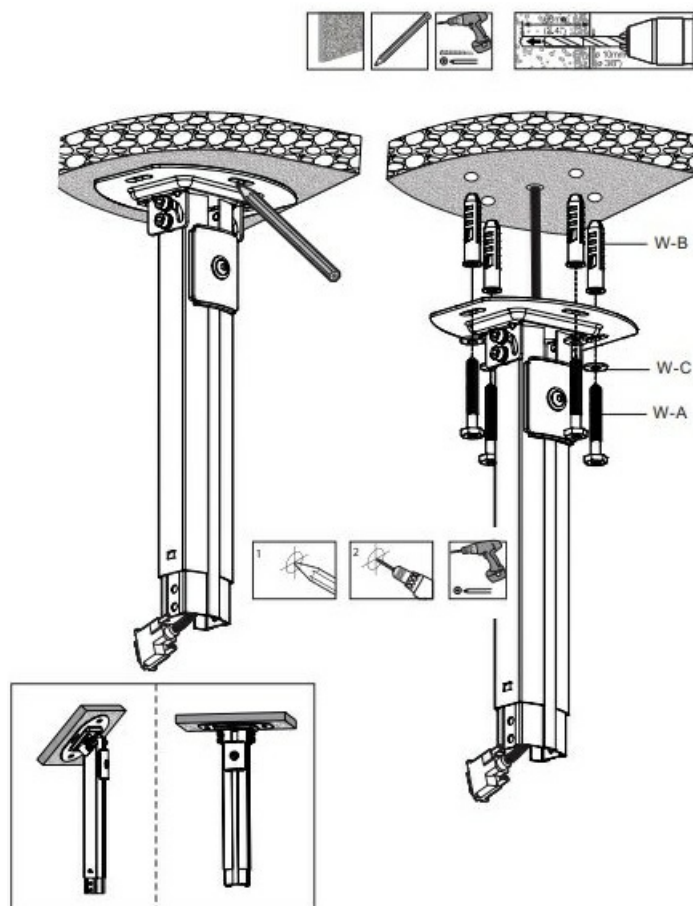


- Mount bracket (B) to arm (A) using spacers (M-L), plates (M-M), bolts (M-I), and washers (M-J, M-K). Tighten

using the allen wrench (T-A).

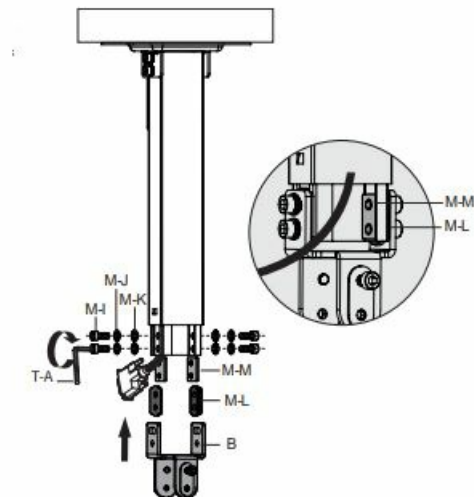


#### STEP 4

- Adjust arms of the bracket (C) to fit the mounting holes of your projector. Use bolts (M-A, M-B, M-C, M-D) and washers (M-E, M-F, M-G, M-H) depending on the size of mounting holes in your projector.

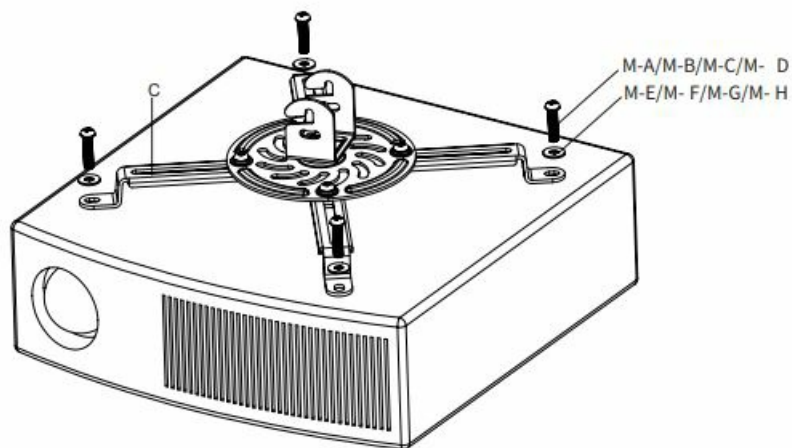

#### STEP 5


- Hook the mount (B) to bolts in bottom of mount (A). Secure using bolts (M-I) and washers (M-J, M-K) as shown in diagram. Tighten using the allen wrench (T-A).

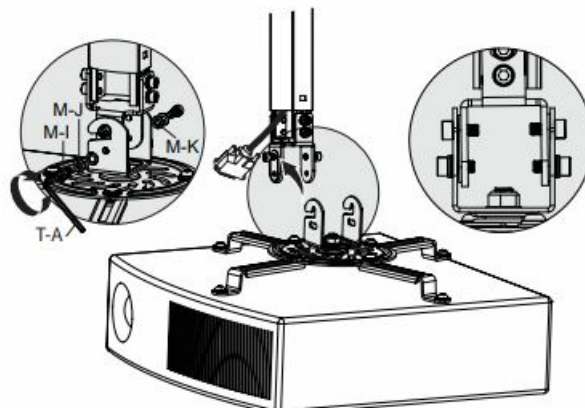



## STEP 6

- Adjust height and tilt of mount using the allen wrench (T-A).

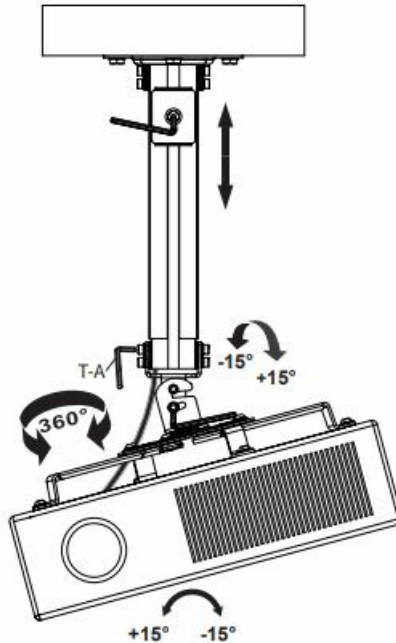

- Love your new VIVO setup and want to share? Tag us in your photo! @vivo\_us
- Open Monday – Friday 7:00am – 7:00pm CST, our dedicated support team can offer immediate assistance with rapid response times. If any parts are received damaged or defective, please contact us.
- We are happy to replace parts to ensure you have a fully functioning product.

☎ • 309-278-5303 AVG. RESOLUTION TIME (within office hrs): 5M 4S


💬 • [www.vivo-us.com](https://www.vivo-us.com) Chat live with an agent! AVG. RESOLUTION TIME (within office hrs): < 15 M

✉ • [help@vivo-us.com](mailto:help@vivo-us.com)

- AVG. RESPONSE TIME (within office hrs): 1HR 8M
- 23% within < 15m
- 38% within < 30m
- 61% within < 1hr
- 83% within < 2hr
- 92% within < 3hr
- FOR MORE VIVO PRODUCTS, CHECK OUT OUR WEBSITE AT: [www.vivo-us.com](https://www.vivo-us.com)
- SKU: MOUNT-VP02W
- Scan the QR code with your mobile device or follow the link for helpful videos and specifications related to this product.
- <https://vivo-us.com/products/mount-vp02b>
- GET IN TOUCH | Monday-Friday from 7:00am-7:00pm CST



## Documents / Resources

	<p><a href="#">V I V O VP02W Universal Extending Ceiling Projector Mount</a> [pdf] Instruction Manual VP02W Universal Extending Ceiling Projector Mount, VP02W, Universal Extending Ceiling Projector Mount, Extending Ceiling Projector Mount, Ceiling Projector Mount, Projector Mount, Mount</p>
---	---

## References

- [🌐 Register a .US.COM domain today!](#)
- [🕒 VIVO - Desks, Monitor Mounting, and More Home & Office Solutions – VIVO - desk solutions, screen mounting, and more](#)
- [🕒 VIVO - Desks, Monitor Mounting, and More Home & Office Solutions – VIVO - desk solutions, screen mounting, and more](#)
- [🕒 Extending Projector Ceiling Mount – VIVO - desk solutions, screen mounting, and more](#)
- [📄 User Manual](#)

Manuals+.