



Vadania VF1245 Push to Open Drawer Runners Instruction Manual

[Home](#) » [vadania](#) » Vadania VF1245 Push to Open Drawer Runners Instruction Manual 

Vadania VF1245 Push to Open Drawer Runners




Contents

- [1 Important Information](#)
- [2 Product Feature](#)
- [3 Installation Instruction](#)
 - [3.1 Installation Precautions](#)
- [4 Dimension](#)
- [5 How to Choose Size](#)
- [6 Customer Support](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)


Important Information



Package

1Pair of drawer slide
8 x Mount screws

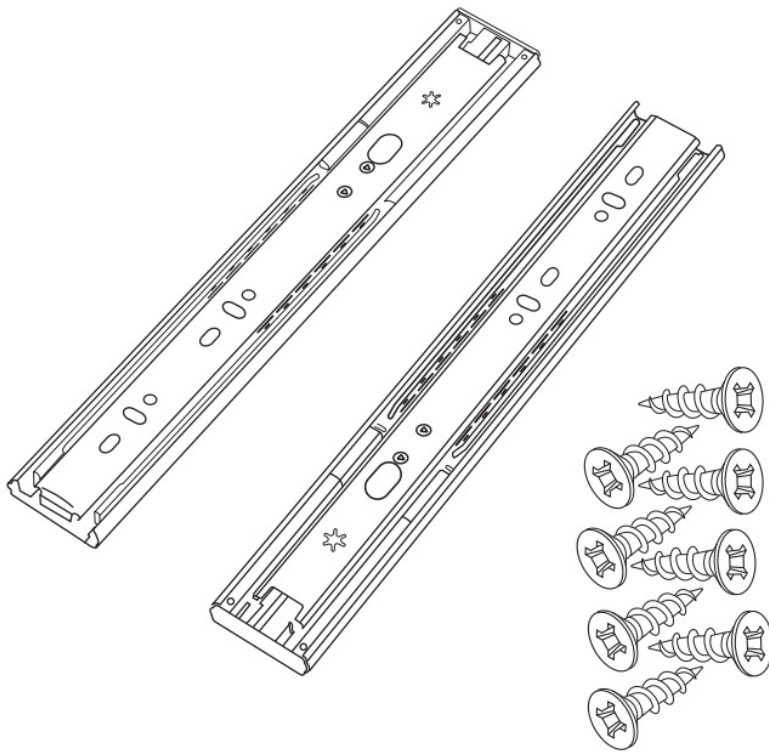


- **NAME VADANIA** PUSH TO OPEN DRAWER SLIDES VF1245
- **MATERIAL:** COLD-ROLLED COLD ROLLED STEEL
- **INSTALLATION METHOD:** SIDE MOUNT
- **MAXIMUM LOAD CAPACITY:** 100LB / 45KG.
- **MINI DEPTH OF CABINET:** DRAWER LENGTH + 0.12IN / 3MM
- **SURFACE TREATMENT:** GALVANIZED / ELECTROPHORETIC BLACK
- **SLIDE STYLE:** 3 FOLDS FULL EXTENSION, SIDE MOUNT, SEPARABLE
- **PLATE THICKNESS:** OUTER SLIDER 0.04IN(1.2MM) / MIDDLE SLIDER 0.04IN(1.2MM) / INNER SLIDER 0.06IN(1.5MM)
- **SIZE:** 10-24IN / 250-600MM
- **SCOPE OF APPLICATION:** &,9,/851,785(2 &())851,785(KITCHEN CABINETS/WARDROBES, ETC

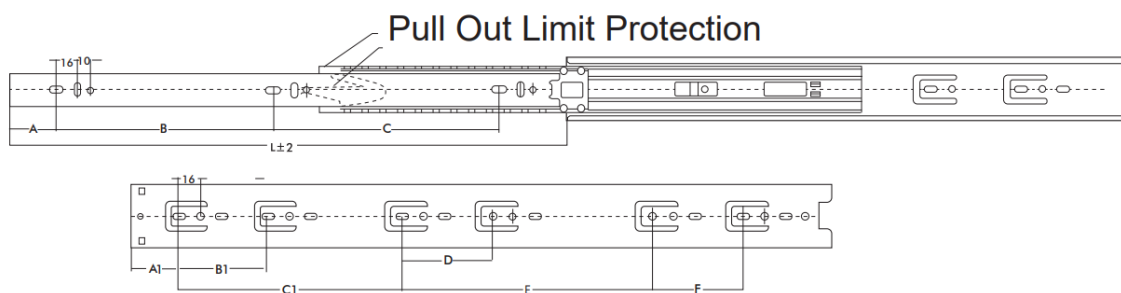


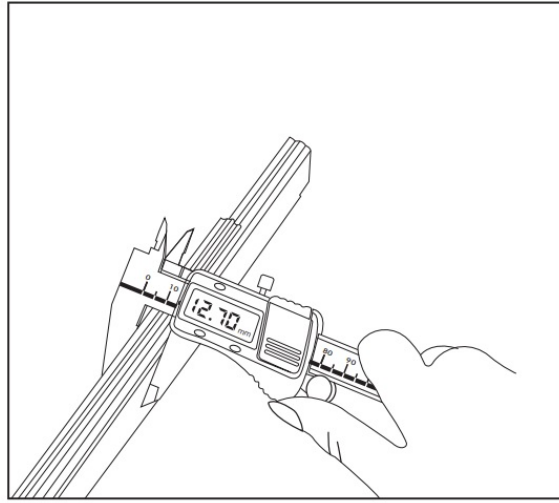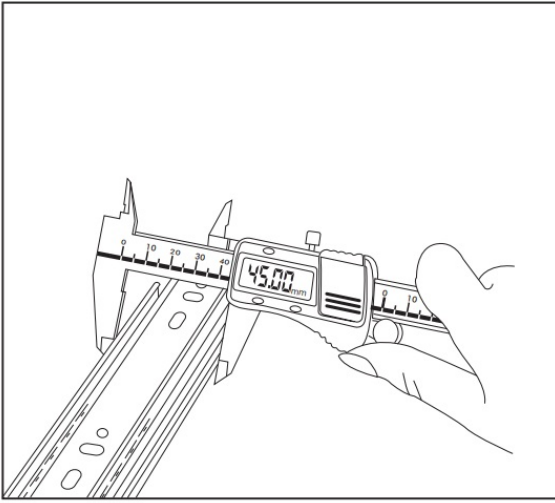

Product Feature

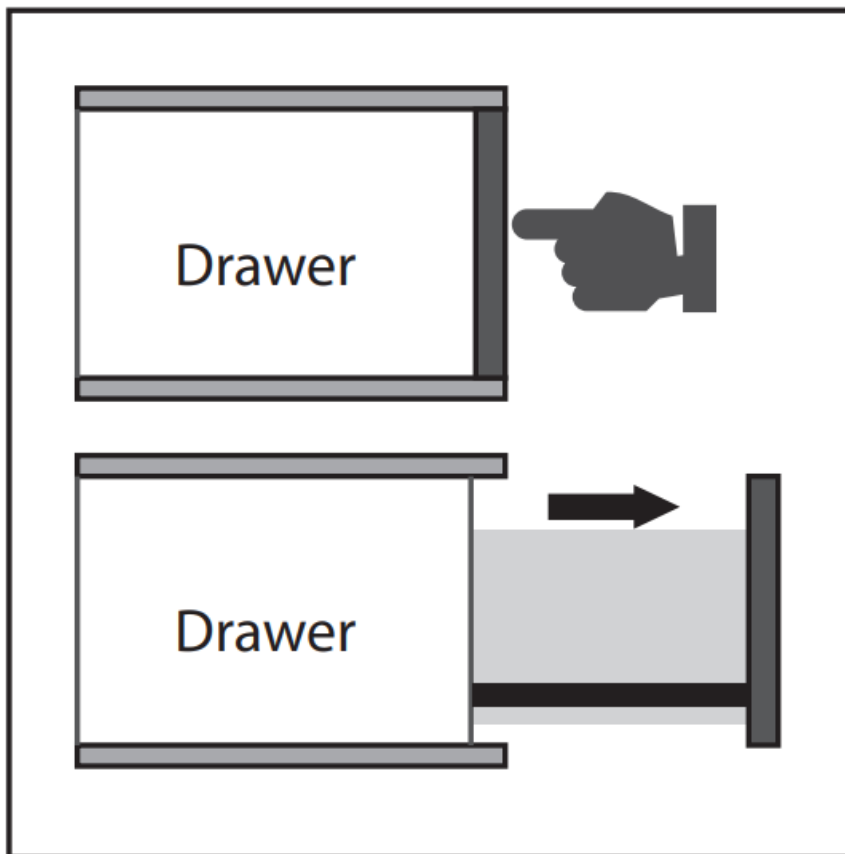


Push-to-open-Device

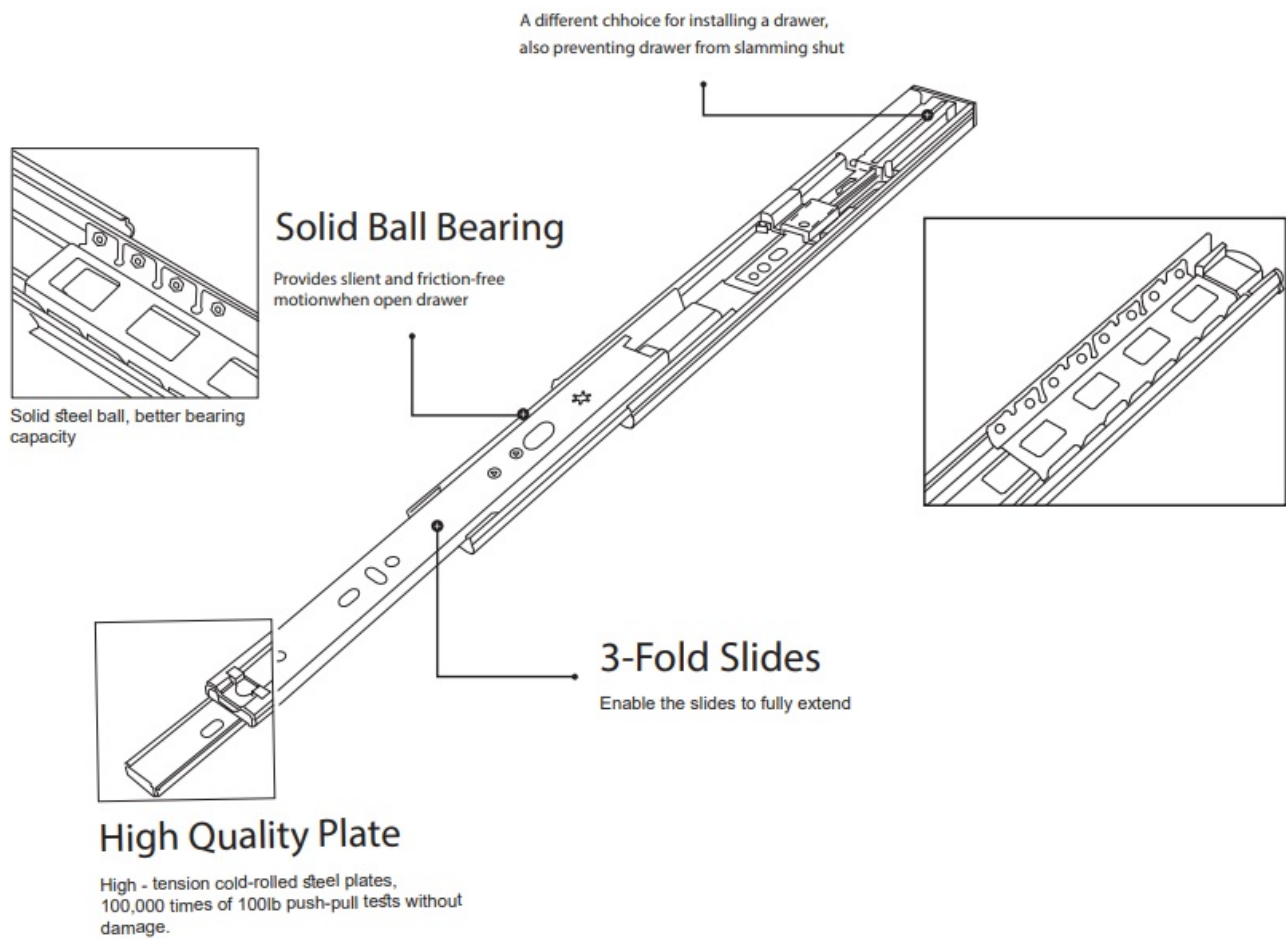


Installation Instruction

Step 1 Separate drawer and base portion before mounting with provided lever

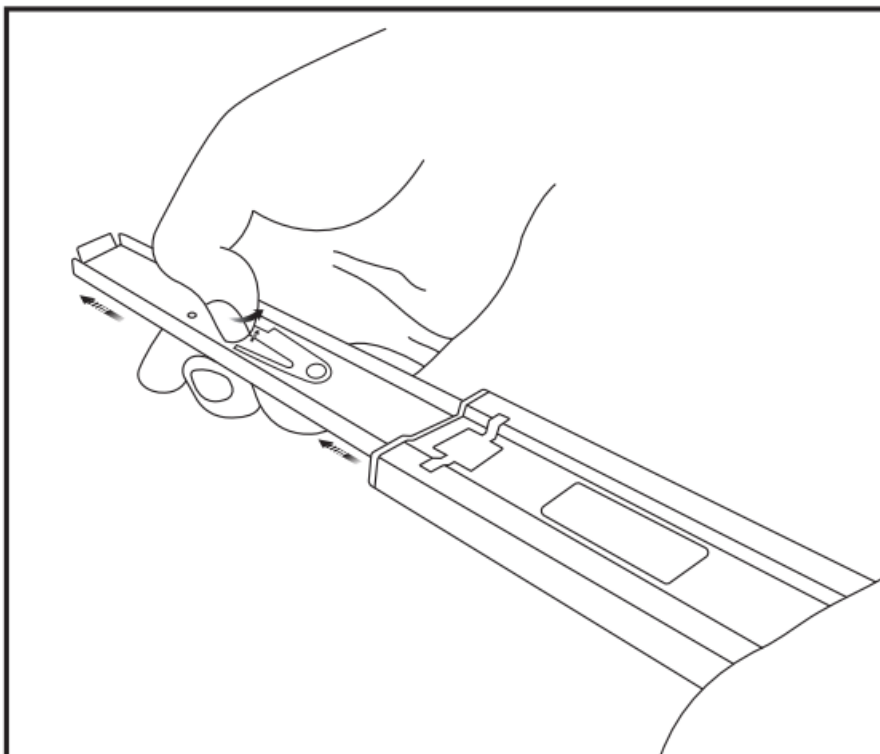


Step 2

Installation Instruction Make sure the slides are leveled during the installation process.

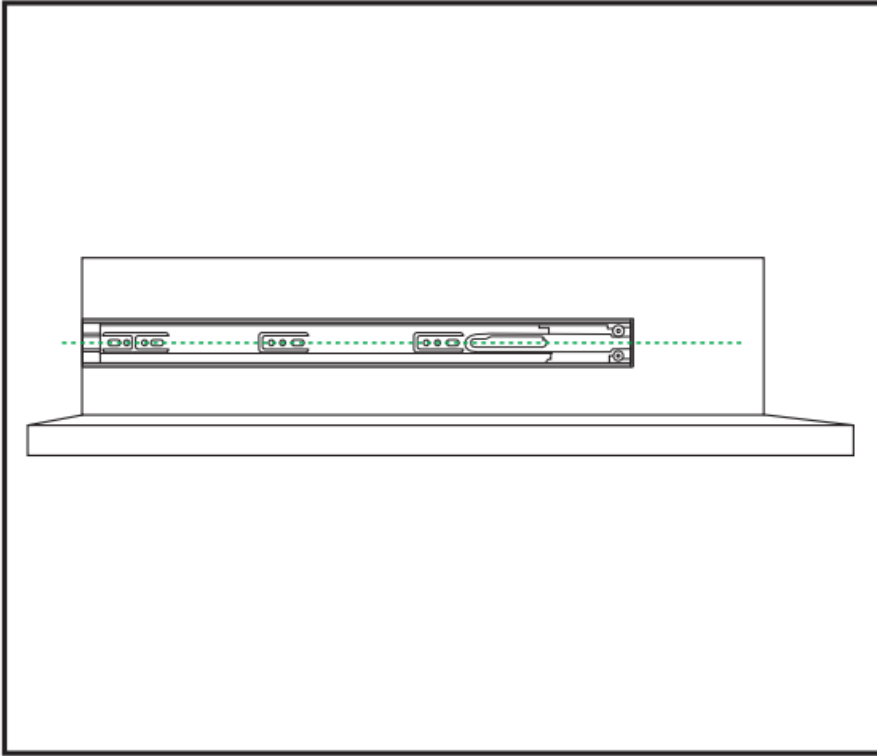


Step 3


1. Frameless Cabinet: Place the outer member flush with the front edge of cabinet
2. The thickness of the drawer panel should be reserved for cabinets with face frames.

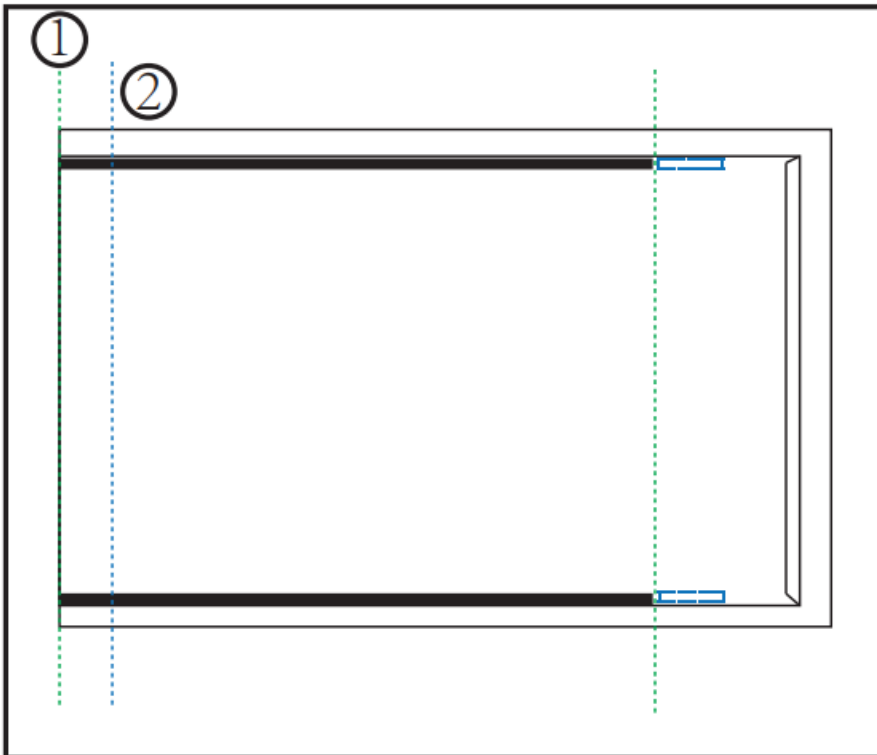


Step 4 Mount the screws in the permanent mounting (Breathing) holes

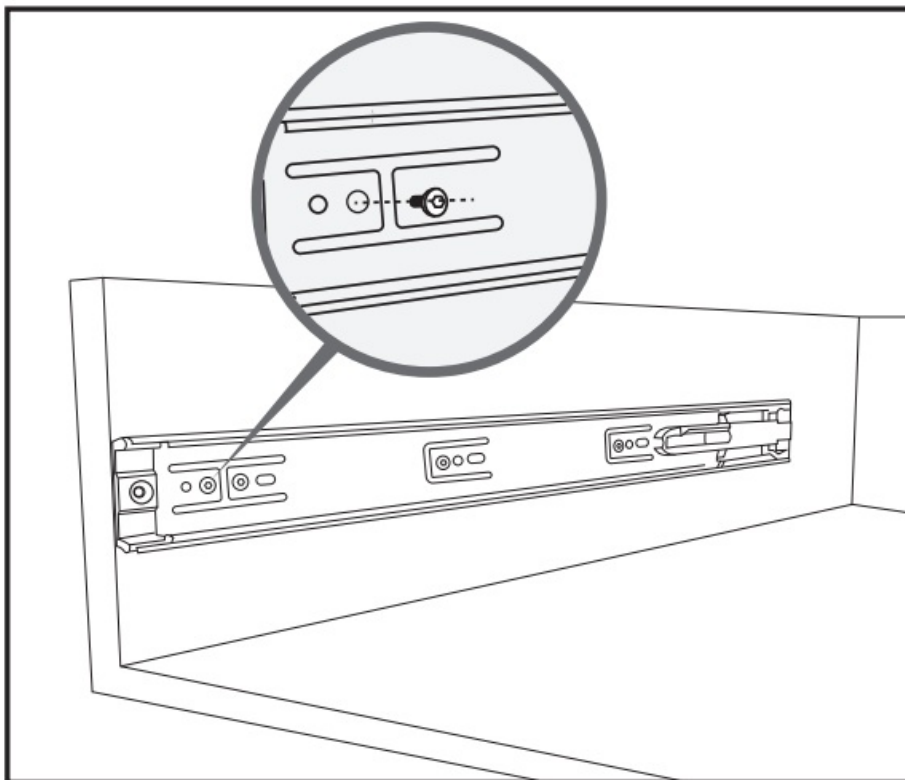


Step 5 Adjust and level the inner member. mount the screws in the permanent mounting holes

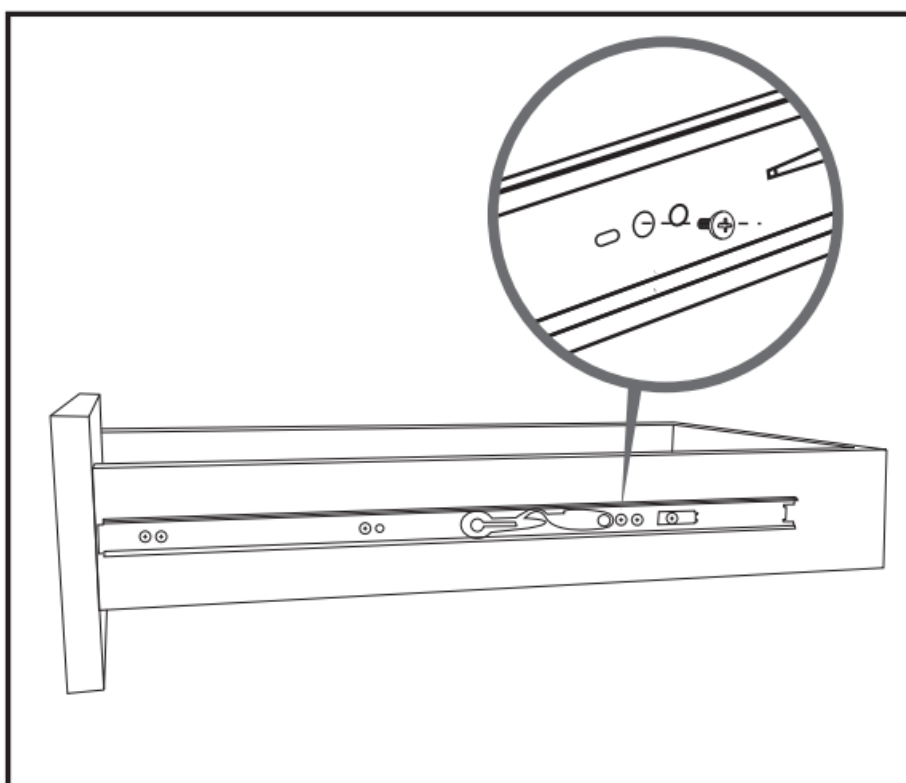

Step 6 Move the metal retainer to the front of cabinet member and insert the drawer box carefully.

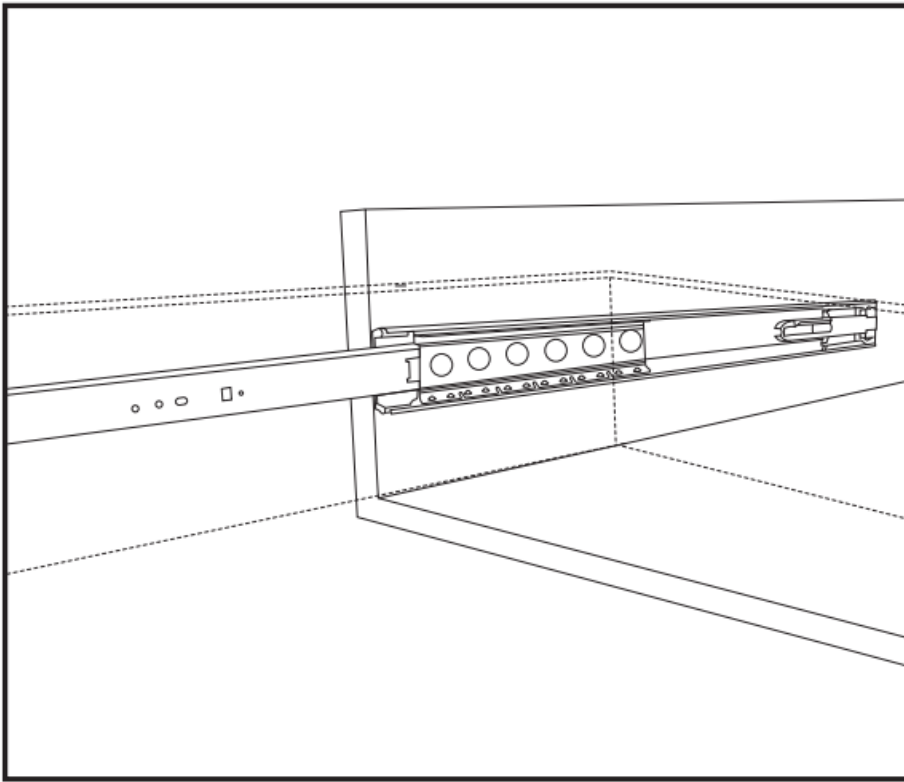


Installation Precautions

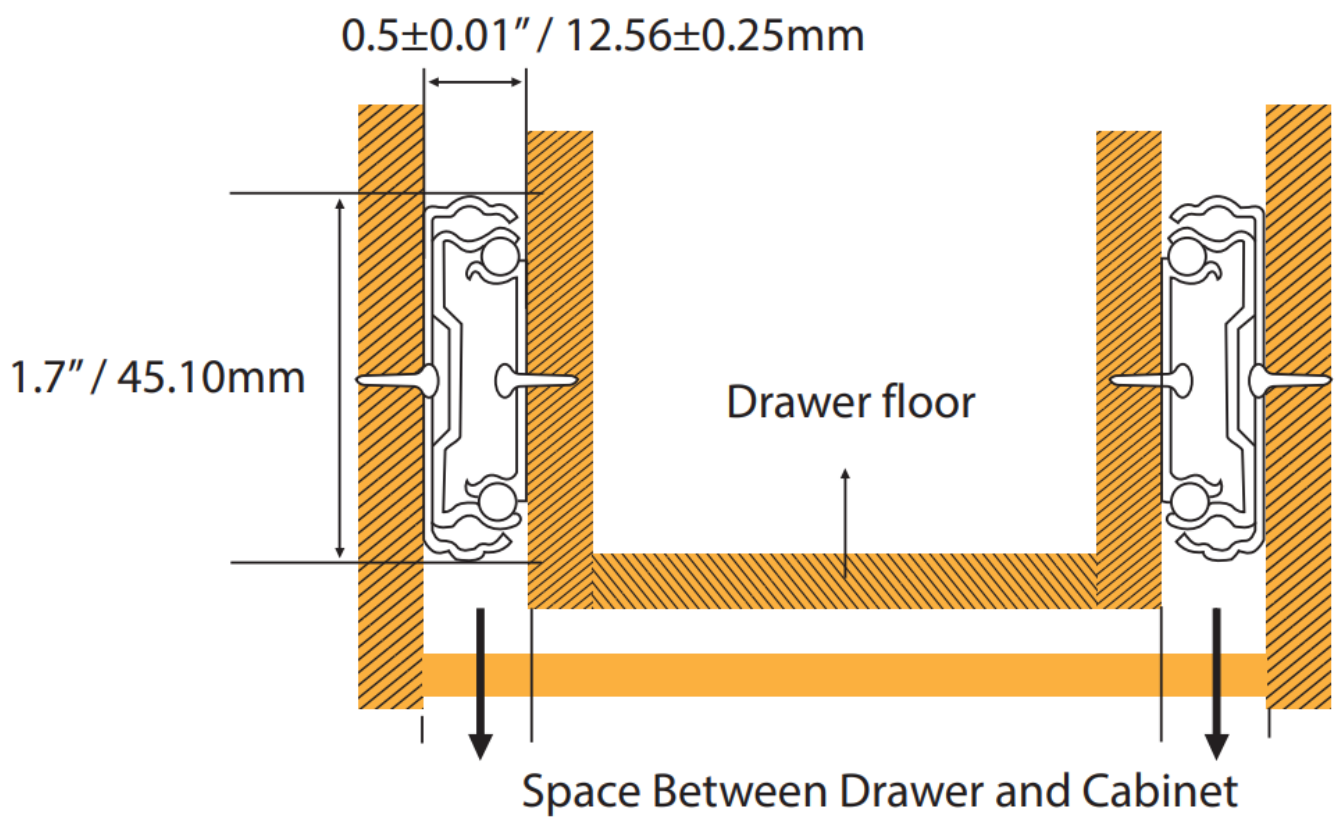

Size Table

Dimension

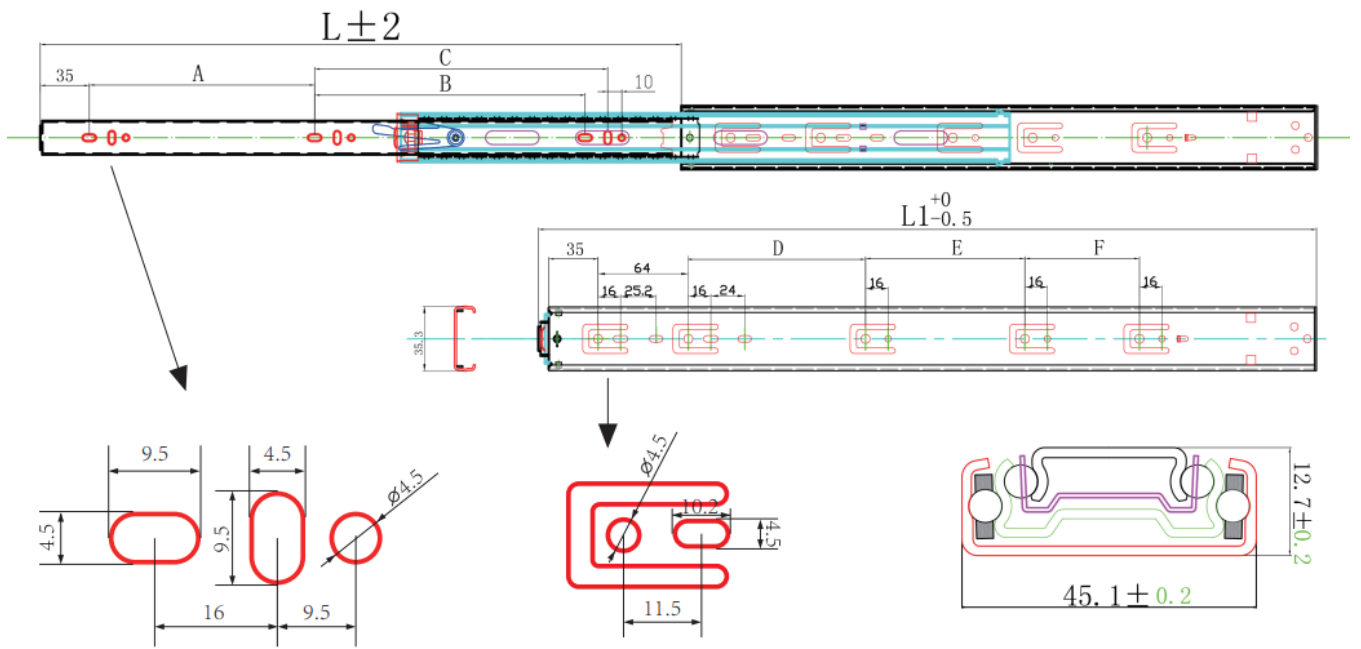

	Slide	Slide				Scr	ews H ole	s Position		
Size	Length(L1)	Travel(L)		Thickness	A	B	C	D	E	F
10''/250 mm	10''/250m m	10''/250 mm			5.6''/1 44mm		2.5''/6 4mm			
12''/300 mm	12''/300m m	12''/300 mm			7.5''/1 92mm			2.5''/64mm		
14''/350 mm	14''/350m m	14''/350 mm			3.7''/9 6mm	5''/128 mm	5.6''/1 44mm	3.7''/96mm		
16''/400 mm	16''/400m m	16''/400 mm	1.7''/45m m	0.5''/12.7 mm	5''/128 mm	6.2''/1 60mm	3.7''/96mm		2.5''/64mm	
18''/450 mm	18''/450m m	18''/450 mm			6.2''/1 60mm	6.2''/1 60mm	6.9''/1 76mm	3.7''/9 6mm	3.7''/96mm	
20''/500 mm	20''/500m m	20''/500 mm			7.5''/1 92mm	6.2''/1 60mm	6.9''/1 76mm	5''/128 mm	5''/128mm	
22''/550 mm	22''/550m m	22''/550 mm			7.5''/1 92mm	8.8''/2 24mm	9.4''/2 40mm	6.2''/1 60mm	5''/128mm	
24''/600 mm	24''/600m m	24''/600 mm			8.8''/2 24mm	8.8''/2 24mm	9.4''/2 40mm	5''/128 mm	5''/128mm 3.7''/96 mm	

How to Choose Size

Measure the depth of the drawer (for example, if the depth is 13in/330mm, choose 12in/300mm drawer slides. Deviations of 0.7in/20mm-1in/30mm are suitable).

Customer Support

Contact Us

7KHR FLDOZHEVLWH

<https://vadania.com/>


Email: info@vadania.com



Facebook Page

vadania

Documents / Resources

	<p>Vadania VF1245 Push to Open Drawer Runners [pdf] Instruction Manual VF1245 Push to Open Drawer Runners, VF1245, Push to Open Drawer Runners, Open Drawer Runners, Drawer Runners, Runners</p>
---	--

References

- [🏠 Home - Vadania | Home Upgrader](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.