



VBET VT9712 Advanced Multipoint Bluetooth Cordless Headset User Manual

[Home](#) » [VBET](#) » VBET VT9712 Advanced Multipoint Bluetooth Cordless Headset User Manual 

Contents

- [1 VBET VT9712 Advanced Multipoint Bluetooth Cordless Headset](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Product Overview](#)
- [5 Use Instructions](#)
- [6 Features](#)
- [7 Technical Specifications](#)
- [8 FCC statement](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)



VBET VT9712 Advanced Multipoint Bluetooth Cordless Headset



Product Information

- **Product Overview**

- The VT9712 Bluetooth Headset is a wireless device that allows you to connect to your smartphone or laptop via Bluetooth technology.
- It offers a wide range of features and is designed to be comfortable to wear and easy to use.

- **Package Contents**

The package includes:

- 1 VT9712 Bluetooth Headset
- 1 Charging base
- 1 USB Cable
- 1 User manual

- **Headset Overview**

The headset features:

- LED indicator
- Multi-function button
- Speaker volume button
- Headphone mute button

- **Base Overview**

The base features:

- Charge contacts
- LED indicator
- Pairing button
- Micro USB port for powering & connecting to a PC

Product Usage Instructions

• VT9712 BT Pairing with Bluetooth Device

- Make sure that your smartphone or laptop has Bluetooth function enabled.
- Activate the Bluetooth function on your smartphone or laptop.
- Turn on the headset.
- Pair the headset with your smartphone or laptop by following these steps:
- Press and hold the multi-function button for more than 6 seconds. The LED will flash red and blue alternately, indicating that the headset is in pairing mode.
- Search for Bluetooth devices on your smartphone or laptop. Open the Bluetooth menu and press “discover” or “add” to search for VT9712 BT.
- When VT9712 BT appears on your Bluetooth devices list, select it to complete the pairing process.

• VT9712 BT Usage

- Once the pairing process is complete, you can use the VT9712 BT headset to make and receive calls, listen to music, and perform other audio-related tasks. Refer to the user manual for detailed instructions on using specific features of the headset.

• VT9712 BT Base

- The VT9712 BT base is used for charging the headset and provides a convenient place to store it when not in use.
- Simply place the headset on the charging base to begin charging.
- The LED indicator on the base will show the charging status.
- Connect the base to a PC using the provided USB cable to power it if needed.

Welcome

Thank you for using the new VT9712 Bluetooth Headset. We are sure you will enjoy its wide range of features, and find the headset comfortable to wear and easy to use.

VT9712 BT headset features

- Wideband audio for exceptional sound quality.
- Volume and mute controls.
- Intuitive headset multi-function button for easy call handling.
- Busylight on headband and audio indicators.
- Advanced hearing protection with safetone™.
- Noise-cancelling microphone.

VT9712 BT base features

- Headset recharge docking cradle.


- Connect to PC for soft Phone(Skype for Business).
- Battery charging indicators.
- Pairing indicators.

Product Overview

Package Contents



Headset



Charging base

Bluetooth Headset




USB Cable





User Manual

User manual

Headset Overview

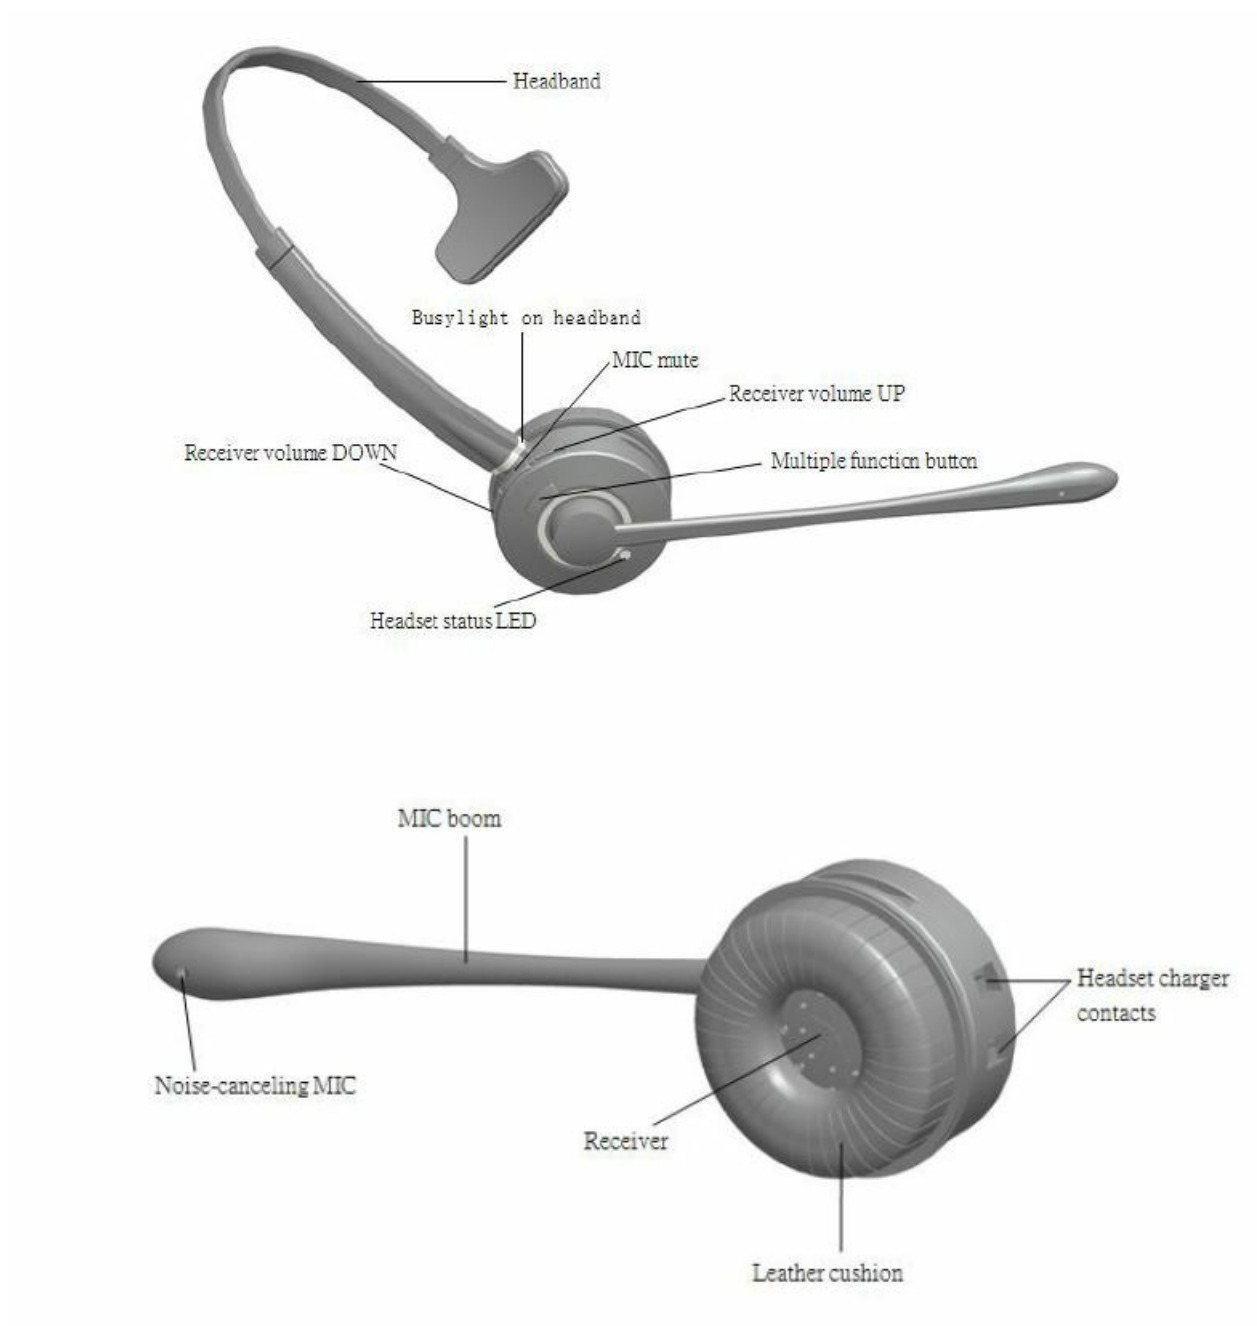


Base Overview

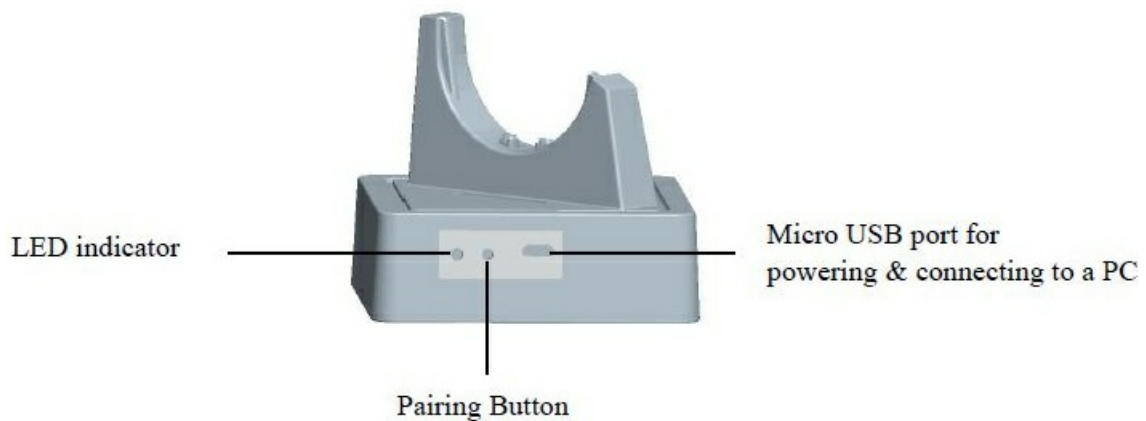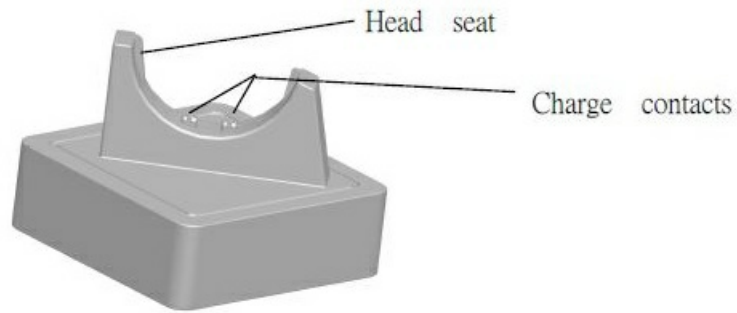

Use Instructions

VT9712 BT Pairing with Bluetooth Device

1. Be sure that your smartphone/ laptop with Bluetooth function.
2. Active the Bluetooth function on your smartphone/ laptop.
3. Turn on your headset
4. Pairing the headset with your smartphone/ laptop.
 1. Press the multi-function key  for more than 6s, and the LED will flash red and blue alternately, which indicates the headset is in pairing mode.
 2. Search Bluetooth devices on your smartphone/laptop. Open the "Bluetooth" menu and press "discover" or "add" to search VT9712 BT on your smartphone/ laptop.
 3. When "VT9712 BT" shows on your Bluetooth devices list, please click it to begin the pairing. Sometimes, the PIN code "0000" is required.
 4. If pairing is successful, the LED will turn on blue and the VT9712 BT icon will show on your smartphone/laptop. You can make calls or listen to music now. Next time, you don't need to do pairing again, just click the VT9712 BT icon to make the connection.
5. If pairing fails, please turn off the headset, and repeat step 4.
6. VT9712 BT can pair with two devices simultaneously. If you want to pair VT9712 BT with another device simultaneously, please turn off the Bluetooth function on the first smartphone/laptop and power off the headset. Then repeat steps 2, 3, step 4 with the second smartphone/laptop. After pairing successfully, reactive the Bluetooth function on the first smartphone/laptop. You will find that VT9712 BT is pairing with two devices now.

7. If no smartphone/laptop is paired with the VT9712 BT within 120S in pairing mode, the VT9712 BT will shut down to save power consumption automatically.

8. After getting paired with VT9712 BT, you can rename it on your smartphone/laptop.

Tips: The headset uses a procedure called “pairing” to connect to a Bluetooth device.

VT9712 BT Usage

1. Answer a Call:

After the smartphone/laptop is successfully paired with VT9712 BT, the headset will ring when a call comes, please press the multifunction key to answer it.

2. Hang up a Call

Please short-press the multifunction key to hang up a call.

3. Microphone mute and on:

During a call, a short press of the MUTE button will put the microphone on mute status. If you short-press the MUTE button again, the microphone will be on.

4. Volume Adjustment


Short click volume + key to increase the volume while short click volume – key to decrease it.

5. Busylight on headband

When connecting a PC or Mobile Phone the Busylight is green, if a call comes the Busylight is red and flashes, if you answer the call, the Busylight is red and always lights on until the call ends. When the call ends Busylight is green.

VT9712 BT Base

1. **Pairing:** When the VT9712 BT headset into pairing mode, push the VT9712 BT Base pairing button and then the blue LED flash, it means Base is into the pairing mode, VT9712 BT headset will connect to Base in 120s. if you want to pair VT9712 BT Base and another Bluetooth device(mobile phone) please see the 3.1.6.
2. Connect the Base Unit to a computer using the USB cable, Launch Skype for Business, and choose VT9712 as the audio device so you can use the headset multi-function button to answer/end calls.

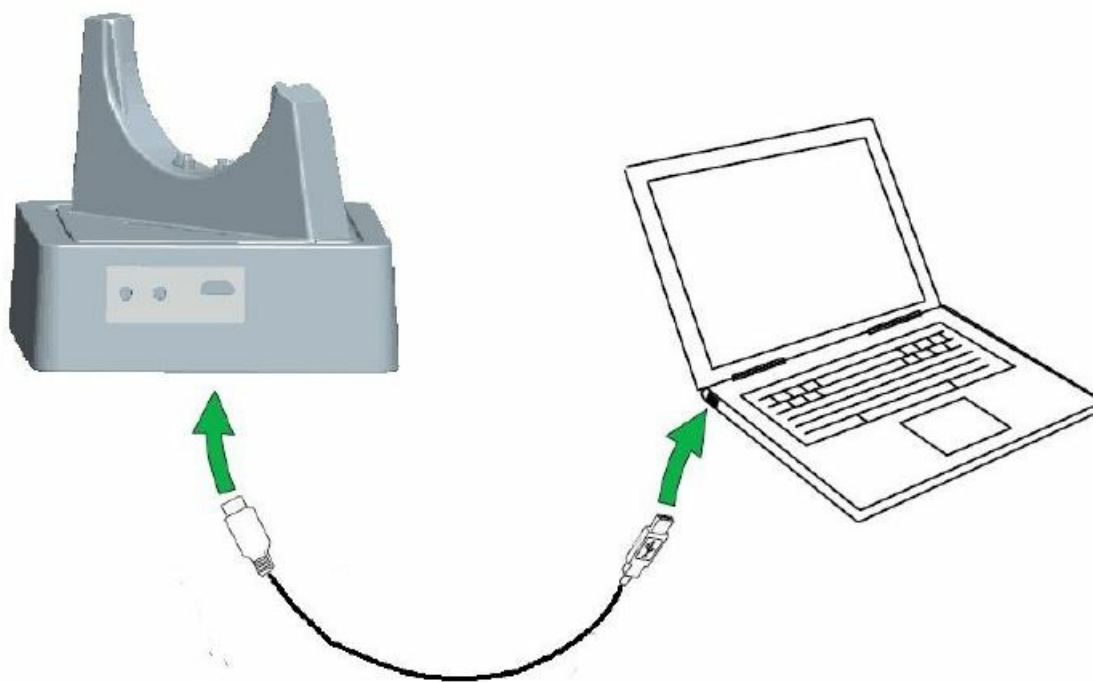


3. Charging

When the VT9702 BT headset is charged, the red light is on and when the headset is fully charged the blue light is on. Taking the headset off from the base, the headset will be in standby mode and it will automatically shut off to save power if the pairing is cut off.

Features

Headset multifunction button


Short or long press the Multifunctional button to answer and end a call.

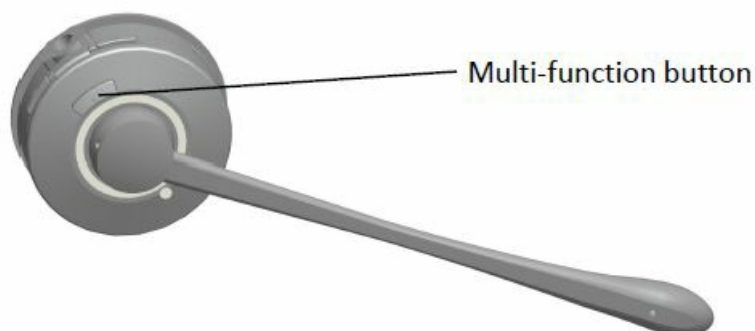

Function Answer a call End a call	Short press √ √	Long press
Power on Pairing Power off		3s 6s+ 3s


Headset Speaker Volume Button

- **The speaker volume buttons:** to adjust the headset speaker volume.

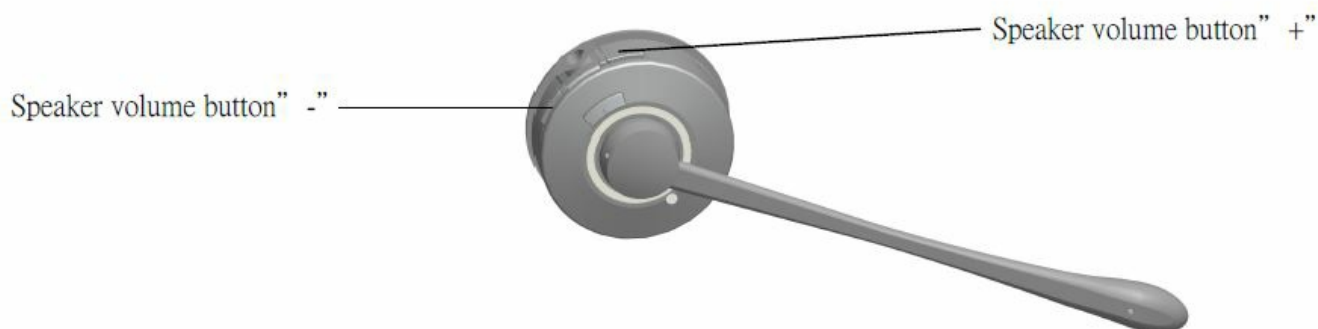


Headset Mute Button

- **Mute button:** to make the microphone mute or on.

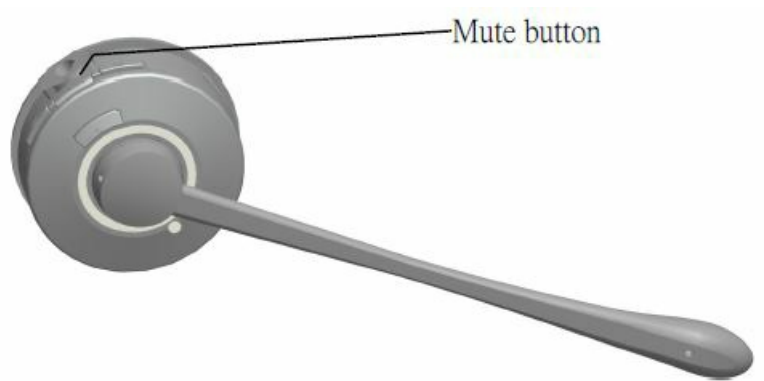

Headset LED Indicators
LED indicates call status

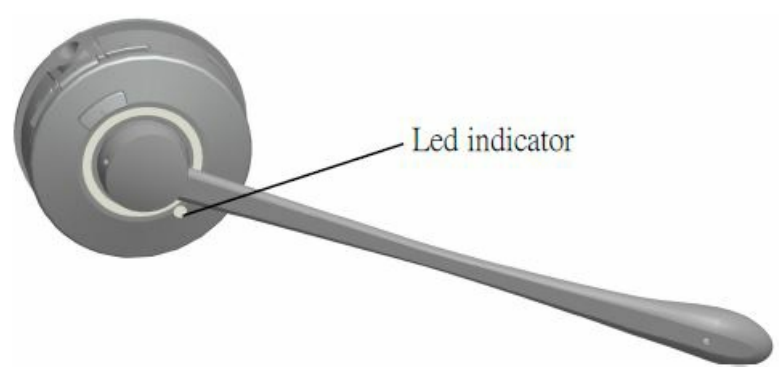

Headset status	LED status
Power on	Blue light flashes four times (300ms on, 300ms off)
Power off	Red light flashes once (2s)
Pairing mode	Blue light and red light flash alternately (red light on 750ms, blue light on 750ms)
Pairing successfully	Blue light flashes (300ms on,8s off)
Answer a call or play music	Blue light flashes (300ms on,8s off)
Charging	Red light on
Fully Charged	Blue light on

Technical Specifications

Headset

- Wideband audio for exceptional sound quality.
- Volume and mute controls
- Advanced hearing protection with safetone™.
- **Bluetooth Version:** V5.0 backward compatible.
- Advanced Multi-points
- **Profile: Headset:** 1.2 Handsfree: 1.6 A2DP
- Microphone with noise cancellation
- Crystal clear sound and voice(DSP)
- **Range:** up to 30m
- **Talk time:** 15 hours from 300mAh battery
- **Stand-by time:** 500 hours
- **Working environment:** 0 ° C to +40 ° C; up to 95% relative humidity non-condensing.
- **Visual indicators:** LED indicates call status, pairing status, and others.
- **Beep:** indicate volume level, microphone mute, and others.
- **Sound:** Mic Noise canceling, the sixth generation CVC echo cancellation, tone control.
- **Charging:** When VT9712 BT docking the base

Headset battery

- **Battery type:** Lithium-ion polymer.
- **Battery capacity:** 300 mA per hour standard.
- **Battery talking time:** Up to 15 hours.
- **Battery life:** Minimum recharging 1000 times.
- **Battery standby time:** At least 500 hours.
- **Operating temperature range:** -20 ° C to +60 ° C.
- **Battery charging time:** Less than 60 minutes to charge 20%.
 - Less than 90 minutes to charge 50%.
 - Fully charged in less than 3.5 hours.
- **Battery storage life** Before first charging, if turn off the headset, the battery will have power for six months.

Base

- **VT9712** BT charging base meets the following specifications.
- **Port:** Micro USB port for charging and connect to PC.
- **Size:** 81 mm x 81 mm x 67 mm.
- **Weight:** 135±5g

Product Disposal Treatment and FCC statement

Dispose of in accordance with local regulations as headphones and recycling regulations. Never treated headsets as household waste. Do not dispose of the headset in a fire, this battery may explode. If damaged, the battery may explode.

FCC statement

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.


Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Warning Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Documents / Resources

<div><p>Bluetooth Headset</p><p>Icon Headset</p></div>	<p>VBET VT9712 Advanced Multipoint Bluetooth Cordless Headset [pdf] User Manual</p> <p>VT9712 Advanced Multipoint Bluetooth Cordless Headset, VT9712, Advanced Multipoint Bluetooth Cordless Headset, Multipoint Bluetooth Cordless Headset, Bluetooth Cordless Headset, Cordless Headset, Headset, Bluetooth Headset, Headset VT9712</p>
---	---

References

- [User Manual](#)