

VIDEX VLF-025C LED Rechargeable Headlamp Dual Light User Manual

Home » VIDEX » VIDEX VLF-025C LED Rechargeable Headlamp Dual Light User Manual






Contents

- 1 SPECIFICATIONS
- **2 PRODUCT OVERVIEW**
- **3 OPERATING**
- **INSTRUCTIONS**
- **4 CHARGING**
- **5 BATTERY INDICATION**
- **6 THE BOX CONTENTS**
- **7 MAINTENANCE**
- **8 WARRANTY**
- 9 Documents / Resources
- 9.1 References

SPECIFICATIONS


LIGHTING MODES		HIGH	LOW	FLASH	COB+HIG H	СОВ	RED ON	RED FLAS H
1.1	31/2	250 Lm	95 Lm	95 Lm	310 Lm	75 Lm	1.2 Lm	1.2 Lm
1.2	* (1)	4 h 50min	9h	21 h	3h	10 h 20min	8h	16h
1.3		74m	46 m	7 m	74 m	46 m	/	/
1.4		1380 cd	520 cd	12 cd	1380 cd	520 cd	/	/
1.5		CREE XTE 5W, COB 5W						
1.6		5000 K						
1.7	₹	80°			120°		1	
1.8	•	Li-pol 1800mAh, 3.7V (built-in)						
1.9		USB-C 5V 0.8A						
1.10	O	3.5 h						
1.11		IP65						
1.12		1 m						
1.13	Imminimi	70 x 46 x 38 mm						
1.14	া	99 g						

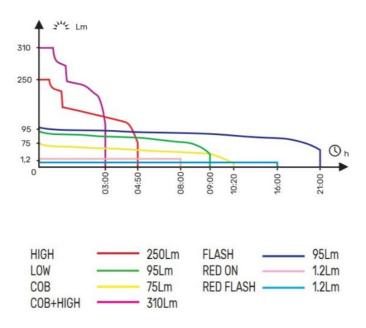

PRODUCT OVERVIEW




OPERATING INSTRUCTIONS

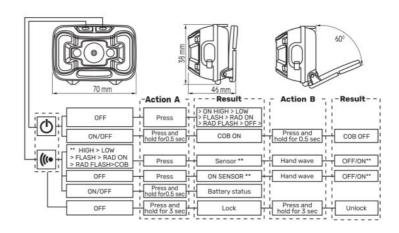

CHARGING



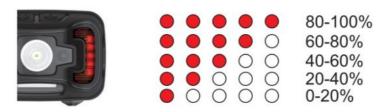

THE BOX CONTENTS



SPECIFICATIONS

- 1.1 Luminous fl ux
- 1.2 Runtime
- 1.3 Beam distance
- 1.4 Light intensity
- 1.5 Type of LED(s)
- 1.6 Light color temperature
- 1.7 Viewing angle
- 1.8 Battery type
- 1.9 Input parameters
- 1.10 Charging time
- 1.11 Dust and moisture protection level
- 1.12 Impact resistance level
- 1.13 Product dimensions
- 1.14 Product weight
- * The output is measured over the total runtime, including periods of reduced output caused by built-in overheating protection. Actual performance may vary based on the operating environment.

PRODUCT OVERVIEW

- 2.1 ON/OFF button
- 2.2 Sensor button
- 2.3 Main light
- 2.4 COB light
- 2.5 Red light
- 2.6 Battery indicator
- 2.7 Charging port

OPERATING INSTRUCTIONS

Main Light: Press the ON/OFF button to turn the light on, cycle through lighting modes, and turn it off . COB Light: Press and hold the ON/OFF button for 0.5 seconds to turn the COB light on, and repeat the same action to turn it off .

Sensor Function: To activate the sensor in the current mode, select your preferred lighting mode and press the SENSOR button to save the current mode. Wave your hand near the front of the headlamp to turn it on or off. To activate the sensor in the last saved mode, press the SENSOR button while the light is off. To deactivate the

sensor, press the SENSOR button again.

Locking/Unlocking the Headlamp: With the light off, press and hold both buttons for 3 seconds to lock the headlamp, and repeat the same action to unlock it.

Battery Status: To check the battery level, ensure the light is switched off.

Press and hold the SENSOR button, and the battery level will be displayed for 2 seconds.

Additional Notes: If the light has been on for more than 5 seconds, a short press of the button will turn it off. The headlamp automatically remembers the last selected lighting mode and reactivates it the next time it is turned on.

CHARGING

Turn off the headlamp and open the protective silicone cover;

Connect the USB-A end of the charging cable to a wall charger and the other end to the input port of the headlamp.

During charging, the indicator segments will blink to show the current battery level. When the battery is fully charged, all segments will remain steadily lit.

After charging is complete, unplug the charging cable and close the protective cover to prevent water and dust from entering the headlamp body.

BATTERY INDICATION

To check the battery level, ensure the light is switched off. Press and hold the SENSOR button, and the battery level will be displayed for 2 seconds.

Each LED segment represents approximately 20% of the battery level, with all fi ve segments lit indicating a full charge.

MAINTENANCE

The rechargeable battery inside the headlamp is non-replaceable.

Disassembling the sealed body may compromise the headlamp performance and will void the warranty Recharge the stored headlamp every four months to maintain the Li-Pol battery normal performance.

WARNINGS

High-intensity light of the headlamp can cause eye damage. Avoid shining it directly into anyone's eyes. Keep this headlamp out of reach of children.

The LED light source inside this headlamp is non-replaceable. When the LED reaches the end of its service life, the entire headlamp should be replaced.

The manufacturer shall not be responsible for any damage resulting from the failure to follow these instructions. The manufacturer reserves the right to make changes to the manual – the current version can be downloaded from the website by scanning the QR code.

WARRANTY

The warranty for the headlamp is 2 years.

The warranty does not cover accessories.

During the warranty period, a faulty headlamp can exchanged or returned with prove of purchase and all accessories saved. The following does not apply with the scope of limited warranty: Misuse the product and cause the products integral components damage; Unauthorized disassemble or the presence of deep mechanical damage to the product; Damage due to force majeure.

THE BOX CONTENTS

- 6.1 Headlamp
- 6.2 Headband
- 6.3 Charging cable
- 6.4 User's manual
- 6.5 Warranty card

The product complies with the technical regulations of Ukraine.

 $oldsymbol{\xi}$ The product meets the requirements of EU directives.

Environmental protection. It is forbidden to dispose of the product together with general waste. A used or damaged product should be disposed of in accordance with the Directive on Waste Electrical and Electronic Equipment (WEEE). Contact your local recycling organization for more details.

Production date and batch number are indicated on individual packaging.

Product materials: aluminum, tempered glass.



Documents / Resources



<u>VIDEX VLF-025C LED Rechargeable Headlamp Dual Light</u> [pdf] User Manual VLF-025C, VLF-025C LED Rechargeable Headlamp Dual Light, VLF-025C, LED Rechargeable Headlamp Dual Light, Headlamp Dual Light, Dual Light

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.