



# VISSLES V1 Wireless Mechanical Keyboard User Manual

[Home](#) » [VISSLES](#) » VISSLES V1 Wireless Mechanical Keyboard User Manual 



## VESSELS KEYBOARD

Vessels V1: 84 Keys Mechanical Keyboard with Stylish RGB



### User Manual

#### Contents

- 1 Product Description
- 2 Interface Description
- 3 Charging
- 4 Connection
  - 4.1 System Preferences
  - 4.2 Backlight Preferences
  - 4.3 Marco Recording Function
  - 4.4 Sleep Mode
- 5 Factory Reset
- 6 Parameters
- 7 Documents / Resources
  - 7.1 References
- 8 Related Posts

## Product Description

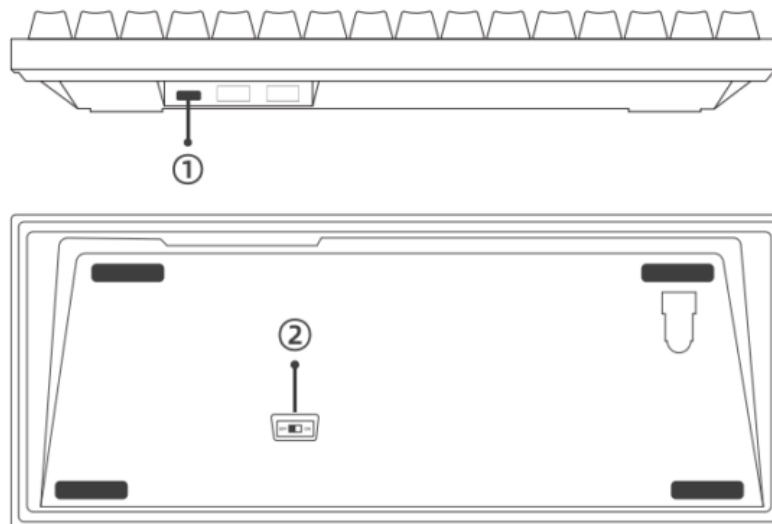
Please read this manual carefully before using the product. The default layout of the keyboard is on Mac. If you are a Windows user, please use the provided key puller to modify the following corresponding keycaps.

### Mac / Windows



## Interface Description

1. USB-C Interface: For charging/connecting devices and using the keyboard on wired mode.




2. Bluetooth Mode Switch

**ON:** Switch the keyboard to Bluetooth mode.

**OFF:** Switch the keyboard to USB mode.




## Charging

1. In Bluetooth Mode, when the backlight  flickers in white, it indicates that the keyboard is low on battery and the keyboard has less than 20% battery life. Please use the USB-A to USB-C cable provided for charging.
2. The status light (on the left under the space bar) glows in red as the battery charges and turns off when charging is completed.
3. Battery life
  - A. In Bluetooth mode, when the keyboard backlight is on and at the highest brightness level, users can use the keyboard continuously for up to 19 hours (the battery is fully charged).
  - B. In Bluetooth mode, when the keyboard backlight is on and at the lowest brightness level, users can use the keyboard continuously for up to 180 hours (the battery is fully charged).

## Connection







### 1. Bluetooth Mode







**A.** Toggle the **Bluetooth Switch** at the bottom to **ON**, then the keyboard is in Bluetooth mode.

**B.** Long press  +  for 3 seconds and the entire keyboard backlight will flash in white for 3 seconds, and then the backlight the  alone will quickly flash, which means that the keyboard has successfully entered into Bluetooth pairing mode.

**C.** Search for the name “Vissles V1” to pair with your device.

**Note 1:** The effective Bluetooth range is 10 meters.

**Note 2:** The keyboard can pair with 5 devices, it can be done by long-pressing  +  /  /  /  / .

Press the key combination  +  /  /  /  /  to quickly switch between devices. The backlight flickers in white 3 times when the switching takes place.

### 2. Wired Mode

**A.** Toggle the **Bluetooth Switch** at the bottom to **OFF**, and the keyboard will enter the wired mode.

**B.** Use the provided USB-A to USB-C cable to connect the keyboard with your device.



## System Preferences

1. Mac is the default operating system.



2. The keyboard supports Windows 2000/XP/Vista/Win7/Win8/Win10, iOS, and macOS systems.

3. Switching OS

**A.** Press  +  on Android/Windows to switch to iOS/Mac, the backlight flickers in white 3 times when the switching takes place.



**B.** Press the key combination  +  on iOS/Mac to switch to Android/Windows, the backlight flickers in white 3 times when the switching takes place.



## Backlight Preferences



1. Press  +  to switch between 19 lighting effects.



2. Press  +  to switch among 9 kinds of monochrome sets.




3. Brightness level adjustment

**A.** Press  +  to increase the brightness level of the keyboard (+1 to +5), and the backlight flickers in white 3 times when the brightness reaches the highest level.

**B.** Press  +  to decrease the brightness level of the keyboard (-1 to -5), and the backlight flickers in white 3 times when the brightness reaches the lowest level.























**C.** Press  +  to increase the lighting speed of the backlight (+1 to +5), the backlight flickers in white 3 times when the lighting speed reaches the highest level.

**D.** Press  +  to decrease the lighting speed of the backlight (-1 to -5), the backlight flickers in white 3 times when the lighting speed reaches the lowest level.

4. To turn off the backlight, press  +  /  to decrease the brightness to the lowest level, the backlight will then go off.

### Marco Recording Function

Please check the software on [www.vissles.com](http://www.vissles.com) for more Marco-programmable functions.

1. The key combination  +  /  /  allows the user to perform 3 sets of tasks.
2. The key combination  +  allows the user to switch between Normal and Macro Mode, the backlight flickers in white 3 times when the switch is complete.
3. Macro Recording Operating Instructions
  - A. Press  +  to switch the keyboard from Normal to Macro mode.
  - B. Long press  +  /  /  for 3 seconds until the backlight of  and  /  flickers in white.
  - C. Start recording, enter the content that needs to be recorded, after recording, press and hold  +  /  /  for 3 seconds, then the macro recording content will be saved.
  - D. Click  /  /  to trigger the corresponding macro recording result.
4. Macro recording mode only supports the recording of 16 characters.

### Multimedia function keys

| Key | Mac Mode                          |                                    | Windows Mode         |  |
|-----|-----------------------------------|------------------------------------|----------------------|--|
|     | Without the 'Fn' key              | With the 'Fn' key                  | Without the 'Fn' key | With the 'Fn' key                        |
| F1  | Decrease display brightness level | F1                                 | F1                   | Decrease display brightness level        |
| F2  | Increase display brightness level | F2                                 | F2                   | Increase display brightness level        |
| F3  | Mission Control                   | F3                                 | F3                   | 3D cycle through programs on the Taskbar |
| F4  | LaunchPad                         | F4                                 | F4                   | Mission Control                          |
| F5  | Nil                               | Decrease keyboard brightness level | F5                   | Decrease keyboard brightness level       |
| F6  | Nil                               | Increase keyboard brightness level | F6                   | Increase keyboard brightness level       |
| F7  | Previous track                    | F7                                 | F7                   | Previous track                           |
| F8  | Play/Pause                        | F8                                 | F8                   | Play/Pause                               |
| F9  | Next track                        | F9                                 | F9                   | Next track                               |
| F10 | Mute                              | F10                                | F10                  | Mute                                     |
| F11 | Decrease the volume               | F11                                | F11                  | Decrease the volume                      |
| F12 | Increase the volume               | F12                                | F12                  | Increase the volume                      |

### Sleep Mode

The keyboard enters the 'backlight sleep mode' after 5 minutes in the standby state.  
When the keyboard is on standby for 30 minutes, Bluetooth enters sleep mode.

### Factory Reset


Long press the key combination **Fn+Space** for 3 seconds to reset.

### Parameters

|                    |                                 |
|--------------------|---------------------------------|
| Product Name:      | Vessels Keyboard                |
| Model:             | Vessels V1                      |
| Keyboard Mode:     | Bluetooth/Wired Mode            |
| Layout:            | Windows/Mac Layout              |
| Number of Keys:    | 84 Keys                         |
| Backlight:         | RGB Dynamic Backlight           |
| Bluetooth Version: | Bluetooth 5.1                   |
| Interface:         | USB-C Interface                 |
| Battery:           | 3750mAh Lithium Battery         |
| Weight:            | 824g (keyboard)+ 8g (foot pads) |
| Dimension:         | 316mm×126mm×39mm                |
| Input:             | 5V/1A                           |



## Documents / Resources

|   |  |
|---|--|
|  | <a href="#">VISSLES V1 Wireless Mechanical Keyboard</a> [pdf] User Manual<br>V1, Wireless Mechanical Keyboard, V1 Wireless Mechanical Keyboard |
|---|--|

## References

- [Vissles | Poppin your life with ease](#)