



WARING WDB600 Double Burner with Toggle Switch Instructions

[Home](#) » [WARING](#) » WARING WDB600 Double Burner with Toggle Switch Instructions 



WDB600 Double Burner with Toggle
Switch Instructions



Double Burner with Toggle Switch
WDB600

Contents

- [1 WDB600 Double Burner with Toggle Switch](#)
- [2 Documents / Resources](#)
 - [2.1 References](#)

WDB600 Double Burner with Toggle Switch




037479
WDB600 Base Unit



Unit Information

60Hz - 1800 Watts
Large Burner - 1300 Watts
Small Burner - 500 Watts
Temperature Settings
1 - Low • 2 - Low/Medium
3 - Medium • 4 - Medium/High
5 - High

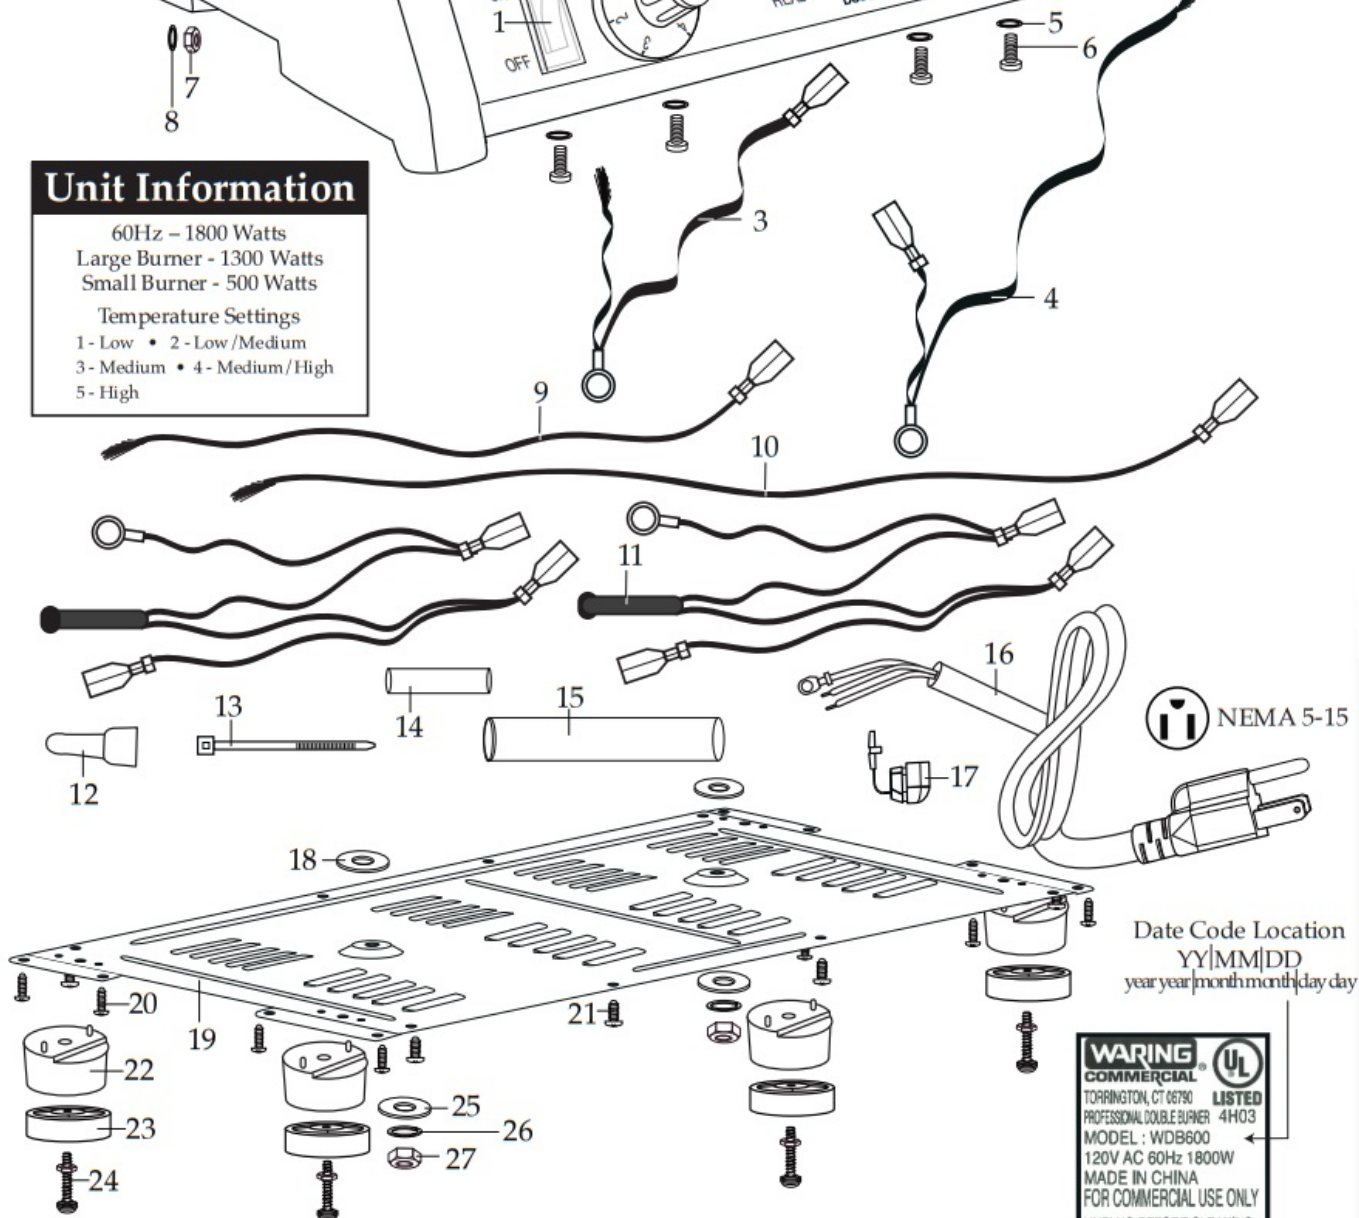


 NEMA 5-15

Date Code Location
YY|MM|DD
year year | month month | day day

WARING
COMMERCIAL
TORRINGTON, CT 06790
PROFESSIONAL DOUBLE BURNER 4H03
MODEL : WDB600
120V AC 60Hz 1800W
MADE IN CHINA
FOR COMMERCIAL USE ONLY
UNPLUG BEFORE CLEANING
DO NOT IMMERSE IN WATER


Illustration#	Part#	Description
1	37470	Toggle Switch (2 required)
2	37471	Knob (2 required)
3	37472	14" Blue Double Lead Assembly
4	37473	26" Blue Double Lead Assembly
5	31118	Heating Element Spring Washer (4 required)
6	31117	Heating Element Screw (4 required)
7	31115	Ground Lead Nut
8	31116	Ground Lead Spring Washer
9	37474	12.25" Brown Lead Assembly
10	37475	27.5" Brown Lead Assembly
11	37476	Green Ready Light with White Lead Assembly (2 required)
12	19123	Crimp Connector (2 required)
13	13731	Wire Ties (5 required)
14	37477	Small Rubber Sleeve (7 required)
15	37478	Large Rubber Sleeve
16	031104	Cord
17	31103	Strain Relief
18	31112	Center Burner Shaft Washer (2 required before bottom plate)
19	31129	Bottom Plate
20	31108	Screw (8 required)
21	31109	Screw (8 required)
22	31120	Plastic Feet (4 required)
23	31106	Rubber Feet (4 required)
24	31107	Screw & Washer Set (4 required comes with screw, 3 washers, 1 spring washer and 1 nut)
23	31112	Center Burner Shaft Washer (2 required after bottom plate)
24	31111	Center Burner Shaft Spring Washer (2 required after bottom plate)
25	31110	Center Burner Shaft Nut (2 required after bottom plate)

Double Burner with Green Ready Light and Red On Light WDB600 (parts listed below are different from the current model)

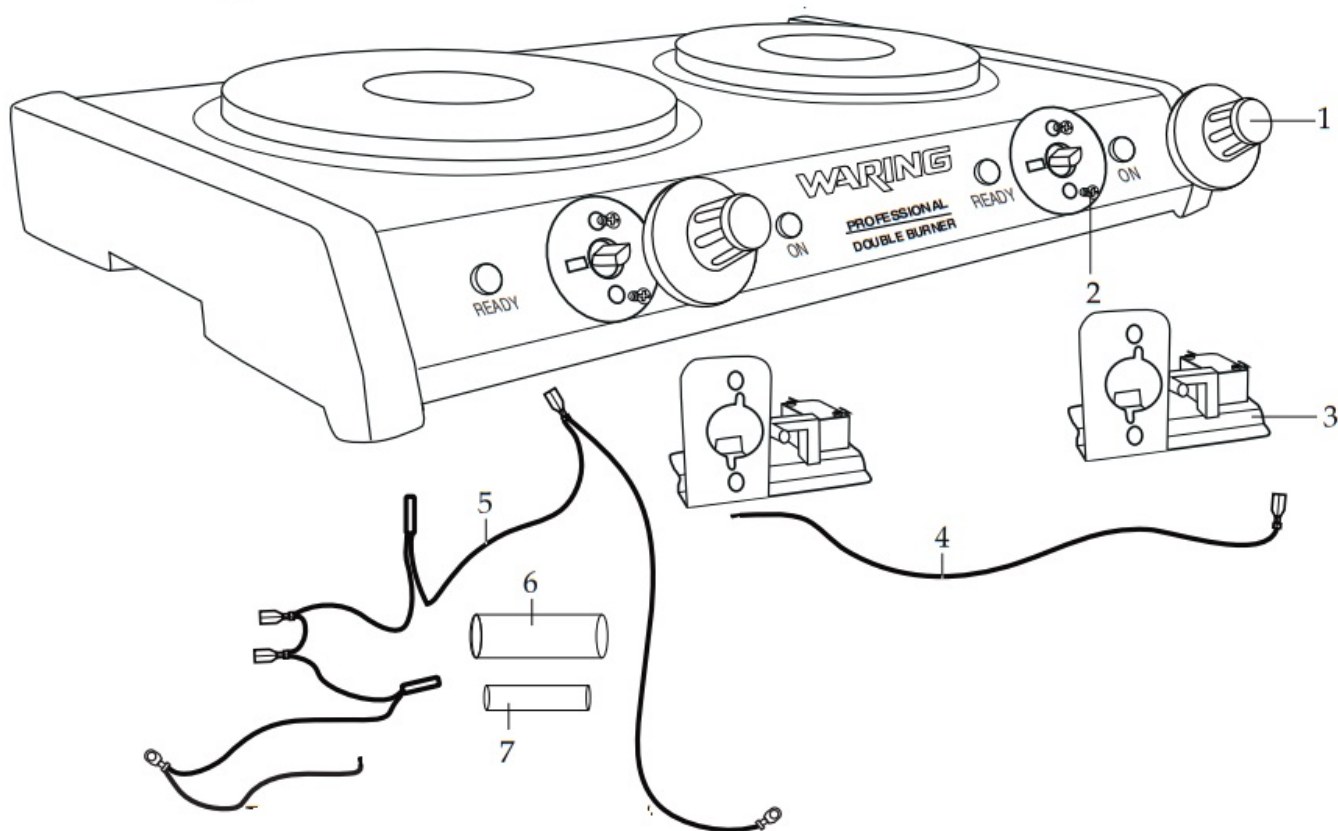

Illustration#	Part#	Description
1	031098	Knob (2 required)
2	031109	Screw (4 required)
3	031100	Bracket with Micro Switch (2 required)
4	031125	22" Red Lead (small burner side)
	031126	14" Red Lead (large burner side)
9	031127	7 Lead Set (small burner side)
	031128	7 Lead Set (large burner side)
10	031124	Connector Sleeve (2 required)
11	031113	Lead Sleeve (4 required)


Wiring Diagram
(for the Above Unit)

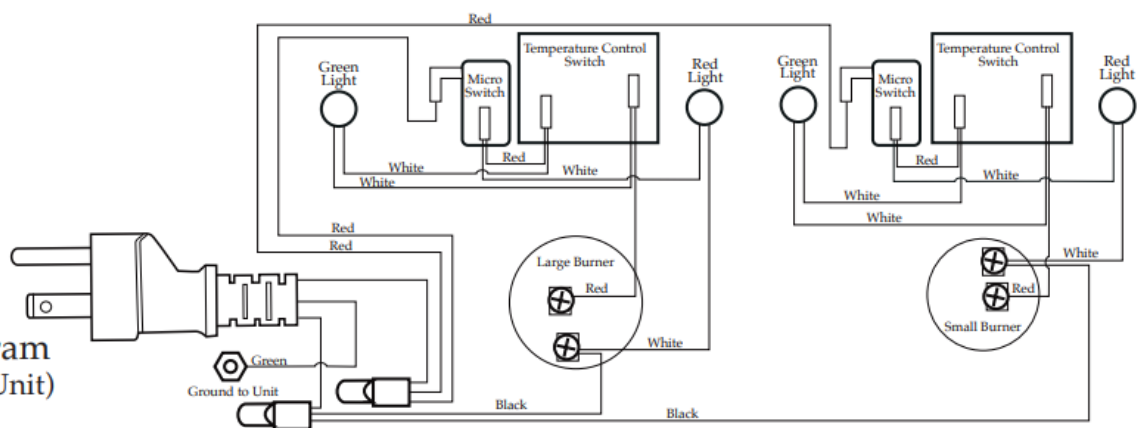

WARING
COMMERCIAL

Revised May 19, 2023

Documents / Resources



[WARING WDB600 Double Burner with Toggle Switch](#) [pdf] Instructions

WDB600 Double Burner with Toggle Switch, WDB600, Double Burner with Toggle Switch, Burn
er with Toggle Switch, Toggle Switch

References

- [W Waring® Commercial](#)