

# **WIWU Mag Touch Keyboard Case User Guide**

Home » WIWU » WIWU Mag Touch Keyboard Case User Guide 🖺

**WIWU Mag Touch Keyboard Case** 



# Mag Touch Keyboard case

#### **Contents**

- 1 IN THE BOX
- **2 Product Model Specification**
- 3 Getting Started Guide
- **4 Bluetooth Keyboard Connection Steps**
- **5 Keyboard Shortcut Function Description**
- **6 Touch Pad Gestures For Systems Above 10S**
- 14.5
- 7! Attention
- 8 Energy Saving Sleep Mode
- 9 Troubleshooting
- 10 Cleaning
- 11 Charging
- **12 Safety Precaution**
- 13 Find Us At
- 14 Documents / Resources
  - 14.1 References
- **15 Related Posts**

## IN THE BOX

- Mag Keyboard case x 1
- Type-C Cable \* 1
- Manual \* 1

### **Product Model Specification**

1. Bluetooth Interface Standard

2. Operating Distance Available: 10 meters

3. Modulation System: GFSK

Working Current:< 9mA (When the touchpad is working)

5. Standby Current: < 0.3mA

6. Sleeping Current:< 40uA

 Charging Current: 100mN200mA (Backlight)

8. Standby lime:> 100 days

9. Charging lime: 2-3hours

Lithium Battery Capacity:
 250mAh/500mAh (Backlight)


11. Working lime:> 50/100 hours (tum off the backlight)

12. Lithium Battery Life: 3 years

13. Key Strength: 80 ±10g14. Key Life: 5 Million Stroke

15. Operating Temperature: -10 °C - +55 °C

# **Getting Started Guide**



Bluetooth/Working Indicator: Slow flash after entering the Bluetooth pairing mode,long turn on when the connection is successful,and turn off after the keyboard sleeps or shuts down

Caps Lock Indicator: Lights up when the keyboard is in uppercase input

Low Battery Indicator Light: The light will blink when the voltage is lower than 3.3V

Charging Indicator: The light will be on when charging, When fully charged the indicator light is steady to green light



OFF

USB Type C Charging Dock: When Weak current indicator light flashes, put the original accessories. Plug the USB charging cable into this port for charging, Recommended to use a 5V 1A device to charger it

Power Switch


 Toggle the switch to ON, the Bluetooth indicator, Caps Lock indicator, and weak power indicator will light up for 3 seconds at the same time.then the keyboard working indicator turn on, manually press Fn +Z/Fn+DEL to enter pairing {the Bluetooth indicator flashing slowly )




2. Open and unlock your tablet and click on the "Settings icon.




3. In the settings menu.click on the "Bluetooth" menu.

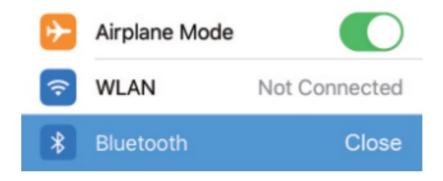

4. Tum on the Bluetooth switch and the tablet will automatically search for Bluetooth keyboard devices.

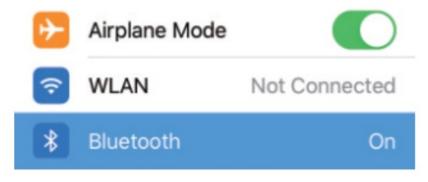

5. Back to your iPad Bluetooth list, tap the name of "WiWU 5.2G keyboard" "Bluetooth keyboard" "Mag Touch Keyboard" when it appears on screen.

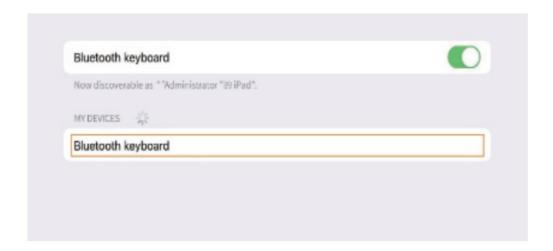

# **Keyboard Shortcut Function Description**

	Back to Home page	-;0;-	Brightness-	-;\.	Brightness+
Q	Search	000	MulitaskingV>irdcm	X	Screen Captue
	Previous track	<b>▶</b> II	Pause/Play	<b>&gt;&gt;</b>	Next Track
M	Mute Key	<b>山</b> )	Volume-	<b>山)))</b>	Volume+
X	Cut		Language Switching		Lock Screen
@	Bluetooth pairing		Back/9ht Bnghtness Ad justment	Fn	Combination Function Keys
•	Voice text input		Touchpad on/off		

Note1: Screen capture function is divided into short press and long press to adapt to different models

Short Press: for models with Home button

Long Press for 2 seconds: for models without Home button

Note2: This button is only available on the bacdklit version of the keyboard



Color Adjustment: direct click.a total of 7 color cycles




Brightness Adjustment: Fn combination button.a total of 3 brightness cycle



Voice Input: the first time to use, you need to enable dictation



Adjust the brightness three-level adjustable.



Switch color

Red

Cyan Purple Yellow White

# **Touch Pad Gestures For Systems Above 10S 14.5**

# Click (Press with one ling er until it feels a tittl e pressed)



Click and hold (Press and hold with one finger)




Drag and move (Tap and hold an item, then swipe your fi nger across the trackpad to move It)



Wake up iPad (Click the touchpad) Or if you are using an exter nal keyboard, press any key




Open dock (Swipe the pointer with one finger from t he bottom of the screen)



Back to home screen

(Swipe the pointer with one finger from the bott om of the screen, After the dock appears, swipe the pointer from the bottom of the screen again)



Single Finger Operation

# Open " Control Center " Show side dock (Move the pointer with one finger lo select the (Swipe the pointer across the right edge status icon at the top right.and click ,Or select t of the screen with one finger. To hide the he status Icon in the upper right and swipe up) side dock, swipe right again) Open notification Center (Move the pointer with one finger to sele ct the status icon at the top left.and click ,Or use one finger to move the pointer n ear the middle of the top of the screen) Scroll up or down Scroll left or right (Double pointing left or right s (Double pointing swipe up or down) wipe) Zoom (Place your fingers close together. Open "today" view (Swipe right with double poin Open to enlarge or knead lo shrink) ting when the home screen or lock screen is visi Two Fingers Oper ation

	Open search from the home screen (Dou ble pointing down swipe)	Auxiliary click (Double pointing: press the icon on the home screen, the mail in the mailbox and the "camera" button in the "control center" to display its quick operation menu) Or if you are using an external keyboard. you can press and hold the control key and click the touch pad
Three Fingers Op	Go to the home screen (Three fingers sw ipe up)	Open the app switcher (Swipe three points up, pause, and then raise your fingers) Or knead fo ur fingers, pause and lift your fingers
	Switch between open apps (Three finger s point left or right swipe)	

# ! Attention

- 1. When not use for long time.suggest to close keyboard.in order to prolong battery lift.
- 2. In order to get longer battery lifl,charging before keyboard power light flashes.charging time must be better more than 2 hours.

# **Energy Saving Sleep Mode**

When keyboard not use will be enter sleep mode after 15 minutes.keyboard indicator will off press any key 3s to wake it up when need use again, then keyboard indicator will tum on.

### **Troubleshooting**

- 1. Make sure the power is turned on
- 2. Ensure keyboard operable distance
- 3. Make sure the battery has power
- 4. Ensure the devicde's Buletooth was turned on
- 5. Ensure the wireless keyboard was connected with the Bluetooth
- 6. Ensure the wireless keyboard paired successfully

## Cleaning

Washing alcohol or a similar cleaning agent decontamination keyboard


# Charging

When battery is low, the power indicator blinking.means need to charge the keyboard

- 1. Connect Genuine Parts USB cable B port to keyboard cradle
- 2. Connect USB cable A port to power adapter or computer USB port
- 3. During charging, the charging indicator will be on, and it will tum green when fully charged.

When system is upgraded to iOS10 – iOS12, the CaplsLock key on the Bluetooth keyboard will default to the function of switching to the Latin keyboard (the CaplsLock key will default to the function of switching language in iOS 13-15), which makes it impossible to switch between upper and lower case. You can do the following settings to restoring normal functionality:

- 1. First connect the bluetooth
- 2. Settings -> General -> Hareware keyboard
- 3. After clicking in, you will see "Caps Lock Latin Switch", (iOS 13-15 CaplsLock key will default to switch language function)" is on, just turn it off.

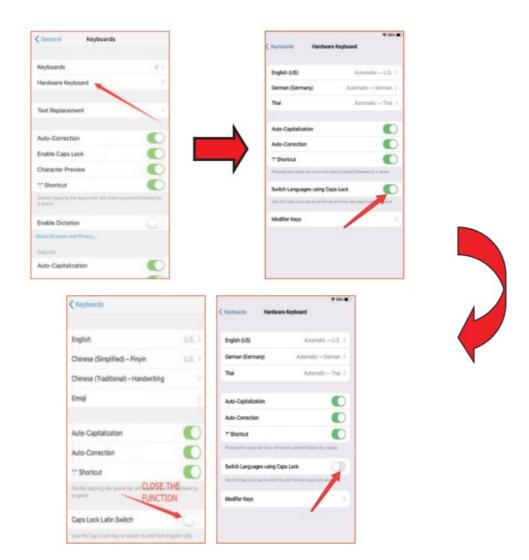

# **Safety Precaution**

Keep the product, accessories and packaging parts out of reach of children to prevent any accidents and choking hazards.

Always keep the product dry to avoid corrosion.

Do not expose the product to extreme temperatures below -10°C (5°F) or above 50°C (131 °F) to preserve the lifespan of the keyboard and battery.

#### Find Us At

https://www.wiwu.com Hello@wiwu.com Designed by wiwu

Designed by wiwi
Made in China



# **Documents / Resources**



WIWU Mag Touch Keyboard Case [pdf] User Guide

6th 2022, 5th 2021, 4th 2020, 3rd 2018, Mag Touch Keyboard Case, Touch Keyboard Case, Ke yboard Case, Case

# References

• User Manual

Manuals+,