

Wuzcon X2B Game Controller User Guide

Home » Wuzcon » Wuzcon X2B Game Controller User Guide 🖫



Contents

- 1 Wuzcon X2B Game Controller
- 2 Applicable Instructions
- 2.1 Electrical parameters
 - 2.2 Apple device instructions: (for Apple arcade and MF I
- 3 Switch connection instructions
- 4 About Charging and main FAQ
- **5 Documents / Resources**
- **6 Related Posts**



Wuzcon X2B Game Controller



User Quick Guide Blue or Green 2.1

Applicable Instructions:

- 1. Applicable devices: Smartphone / Tablet / Smart TV / TV Box / PC / Switch / PS3 / PS4 / Tesla
- 2. About the system: for Android / iOS / iPad OS / macOS / Windows
- 3. Accessories in the package:
 - Game Controller * 1 (Built-in four different Bluetooth connection modes for Android/iOS)
 - Manual *1 (This electronic file is recommended for quick guidance)
 - USB cable *1 (Applicable to PC /PS /Tesla and controller charging, MicroUSB)
 - USB wireless receiver *1 (For PC/ Tesla/ Android TV&TV Box, etc. No Bluetooth devices)
 - Phone holder clip *1 (Support screen 5.5-6.7 inches mobile phone)

Electrical parameters:

• Operating voltage: DC3.7V

• Working current: 8mA

Continuous use: 15H

• Dormancy current: 1 second

Bluetooth Connection Modes:

Xbox Bluetooth Connection Mode:

- [B + Home] Enables DualShock, if the game you are playing supports the PS4 controller you can use this Bluetooth mode.
- [X + Home] Enables D-input, but this mode can support fewer games.
- · Bluetooth name: Xbox Wireless Controller
- · Successful connection: LED1, LED2, LED3 are always on
- · Recommended use, compatible with more games, compatible with more devices
- Universal connection mode. Suitable for Phone, Tablet, TV, TV Box.
- The Xbox Bluetooth connection methods expanded later can be compatible with more games such as COD Mobile, APEX Mobile, Dolphin Emulator, GeForce Now, xCloud Gaming, etc.

Bluetooth V3 Direct Connection Mode:


- [A + Home] Press and hold A, then press Home to turn on (>1 second) or Press and hold A and Home at the same time to turn on (>1 second)
- Bluetooth name: GamePadPlus V3
- · Successful connection: LED1 are always on
- Suitable for players with advanced applications. A third-party app needs to be installed to map the touch screen buttons and the operation is replaced by the controller buttons.
- It is suitable for touch screen games and mobile remote control car drones that do not support controllers on cell phones.
- This mode cannot support any games directly; you must need to install a third-party APP.

Usage Instructions:

- Charge the controller using the USB cable provided in the package.
- For Xbox Bluetooth Connection Mode:
 - Press [B + Home] or [X + Home] to enable the Bluetooth connection mode.
 - Ensure that the LED1, LED2, and LED3 lights are always on to confirm a successful connection.
 - · Compatible with more games and devices.
- For Bluetooth V3 Direct Connection Mode:
 - Press [A + Home] to enable the Bluetooth connection mode.
 - Ensure that the LED1 light is always on to confirm a successful connection.
 - A third-party app needs to be installed to map the touch screen buttons and the operation is replaced by the controller buttons.
 - Suitable for touch screen games and mobile remote control car drones that do not support controllers on cell phones.
 - This mode cannot support any games directly; you must need to install a third-party APP.
- For Apple device instructions:
 - Use the Bluetooth Xbox Connection Mode: [RB + Home] to enable the Bluetooth connection mode.
 - Ensure that the LED1, LED2, and LED3 lights are always on to confirm a successful connection.
 - · Compatible with Apple Arcade and MFi games.

Applicable Instructions

- 1. Applicable devices: Smartphone / Tablet / Smart TV / TV Box / PC / Switch / PS3 / PS4 / Tesla
- 2. About the system: for Android / iOS / iPad OS / macOS / Windows
- 3. Accessories in the package:
- a> Game Controller * 1 (Built-in four different Bluetooth connection modes for Android/iOS)
- b> Manual *1 (This electronic file is recommended for quick
- c> USB cable *1 (Applicable to PC P S /Tes la and controller charging, MicroUSB
- d> USB wireless receiver *1 (For PC Tesla Android TV TV Box, etc. No Bluetooth devices
- e> Phone holder clip *1 (Support screen 5.5 6. 7 inches mobile phone)

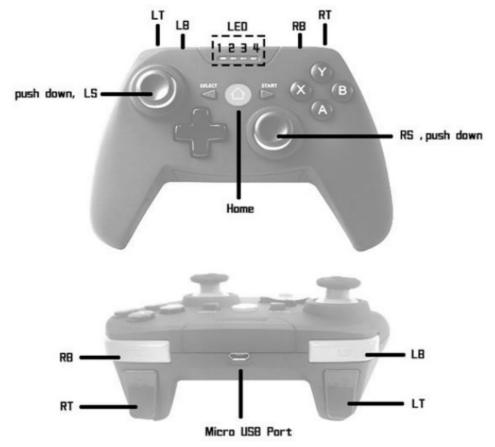

Electrical parameters

- 1. Operating voltage DC3.7V
- 2. Working current 8mA
- 3. Continuous use 15H
- 4. Dormancy current <10uA
- 5. Charging voltage/current DC5V/500mA
- 6. Bluetooth transmission distance <=26ft
- 7. battery capacity 600mAh
- 8. Standby time 30 days at full power

The use of cell phone clips:

Connect your phone to the controller using Bluetooth successfully, you can use the clip to fix the phone to the


1. Expand the phone clip







3. Push the clip in from the bottom







USB 2.4G wireless receiver works with no Bluetooth:

Android TV (Replaces remote control)



Android TV Box / Game Box



PC / Laptop / Surface



Tesla Model (Requires USB C to A converter)



Android devise connection instructions: Bluetooth Xbox connection mode: (X-input)



[RB + Home]

Press and hold RB, then press Home to turn on (>1 second) or

Press and hold RB and Home at the same time to turn them on (>1 second)

Bluetooth name: Xbox Wireless Controller

Successful connection: LED1, LED2, LED3 are always on

- · Recommended use, compatible with more games, compatible with more devices
- Universal connection mode. Suitable for Phone, Tablet, TV, TV Box.
- So the Xbox Bluetooth connection methods expanded later can be compatible with more games. Such as COD Mobile, APEX Mobile, Dolphin Emulator, GeForce Now, xCloud Gaming, etc.
- [B + Home] Enables DualShock, if the game you are playing supports the PS4 controller you can use this Bluetooth mode.
- [X + Home] Enables D-input, but this mode can support fewer games.

Bluetooth V3 direct connection mode:



[A + Home]

Press and hold A, then press Home to turn on (>1 second)

or

Press and hold A and Home at the same time to turn on (>1 s econd)

Bluetooth name: GamePadPlus V3

Successful connection: LED1 are always on

• Suitable for players with advanced applications. A third-party app needs to be installed to map the touchscreen buttons and the operation is replaced by the controller buttons. It is suitable for touchscreen games and mobile remote control car drones that do not support controllers on cell phones.

Bluetooth V3 direct connection mode:



- 1. You can search for "ShootingPlus V3" in the app store or use a similar mapping tool to configure button mapping manually or download it. Once you enter the game, press the appropriate button to adjust to the game's basic button preset.
- 2. You can also search for 'ShootingPlus V3 for Android' or 'PUBG V3' on YouTube; there are detailed videos on

V3 features and usage suggestions.

- 3. For noncontroller games, such as Arena of Valor, PUBG mobile, Wild Rift, Stumble Guys, World of Tanks, etc.
- 4. The above just uses the APP to simulate the touchscreen positioning action in the game, equivalent to a plugin, after all, this part of the game does not really support the gamepad.
- 5. If your drone or robot is controlled by a mobile app, you can also try to use controller V3 instead of your phone.
- 6. This mode cannot support any games directly; you must need to install a third-party APP.

Apple device instructions: (for Apple arcade and MF I games

Bluetooth Xbox connection mode: (X input)



[RB + Home]

Press and hold RB, then press Home to turn on (>1 second) or

Press and hold RB and Home at the same time to turn on (>1 se cond)

Bluetooth name: Xbox Wireless Controller

Successful connection: LED1, LED2, LED3 are always on

- Xbox Bluetooth mode is recommended for better compatibility with controller-enabled Apple Arcade and MFi
 games for COD Mobile, Genesis Impact, Apple Rider, Minecraft, GBA Emulator, Steam Link, Cloud Gaming,
 etc.
- Suitable for iPhone, iPad, Mac, MacBook, Apple TV
- [B + Home] Enables DualShock, if the game you are playing supports the PS4 controller you can use this Bluetooth mode.
- [Y + Home] Enables V3, but only for versions iOS 13.1 and earlier. Not recommended.

Switch connection instructions



[RT + Home]

Press and hold RT, then press Home to turn on (>1 second) or Press and hold RT and Home at the same time to turn o n (>1 second)

select 'Chang Grip/Order' from the menu (auto conn)

Successful connection: LED2, LED3 are always on

Please also note that the factory key layout is not Y/X/B/A

About the wired connection of PS3, PS4, PS5 (and the way to adapt to wireless)

For PS3 wired

Plug the controller directly into the PS3 with the USB c able for automatic recognition.

For PS3 wireless

After the wired connection is successful, please unplug the network cable, and the wireless controller c an be used.

Wired connection is successful: Connection successful, LED1 is always on





Wireless connection is successful: and LED3 flash briefly, then LED1 is always on.

For PS4, PS5 wired

After P4, P5 are connected to the USB cable, press the Home (2 seconds) button again to identify.

Then enter the controller wired mode.

For PS4, PS5 wireless

After the connection is successful, the controller can be used via the USB cable. At this time, please unplug the cable and the wireless controller can

be used.

The wired connection is successful: The connection is successful, and LED1 is always on.



Wireless connection is successful: Wired LED1 transfer to LED4 is always on.

No for PS5 games, only for PS4 games

2.4G Wireless connection method on PC / Smart TV / TV Box / Tesla:



[LB + Home]

Insert the 2.4G USB Dongle into the host USB port.

Press and hold LB, then press Home to turn on (>1 second) or


Press and hold LB and Home at the same time to turn on (>1 se cond)

LED1, LED2 flash quickly (auto conn)

Successful connection: LED1, LED2 are always on


- USB is inserted into the receiver, the default Xbox controller mode (X-input).
- If your Android TV/TV box doesn't have Bluetooth, you can try this.
- Windows 7/8/10/11 does not require additional driver installation.
- Because Tesla does not have a USB A port, only USB C, so you may need to prepare a USB C to A adapter in advance.
- Only one game controller can be connected to the USB receiver.
- Long press "SELECT" + "START" for 5 seconds to switch to D-input mode. Windows only.

Wired Mode for Windows 7/8/10/11 and Tesla

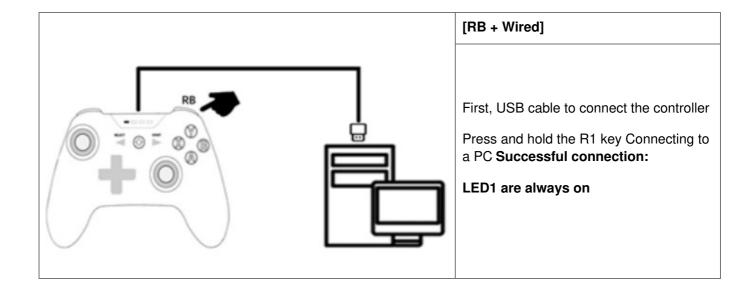

- The USB wired connection is successful and the default Xbox controller mode (X-input).
- (For Windows) Change to D-input mode by pressing and holding 'Home' for 5 seconds.
- D-input mode connection is successful, LED2 will keep on.
- The above way wired connection Tesla if the controller does not work, please press and hold the 'Home' button for more than five seconds, LED1 turn to LED2, done.

About Charging and main FAQ

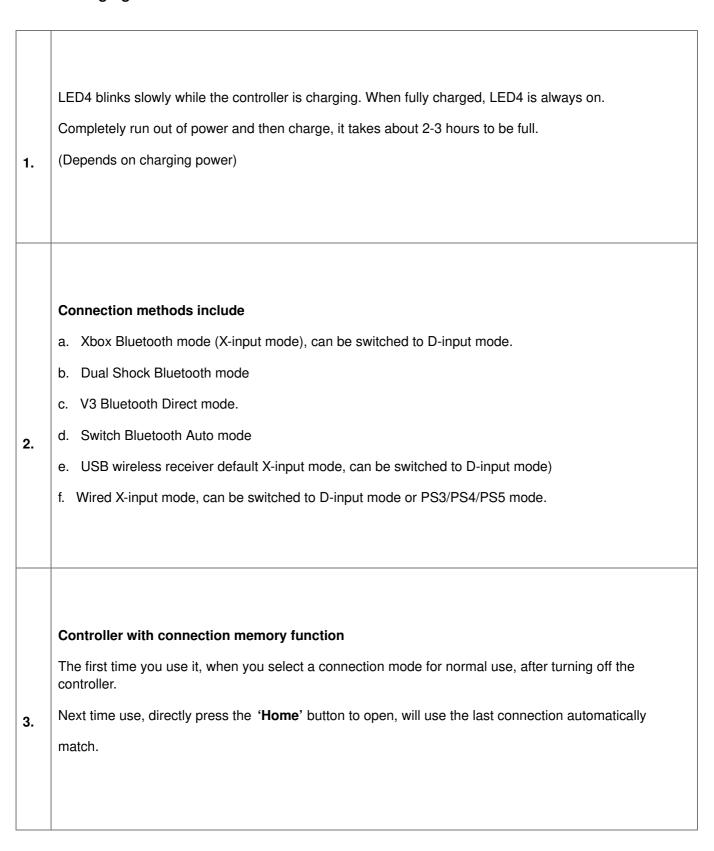

4.	After the controller is turned on without any use action, five minutes after the automatic shutdown hibernat ion (The next time to enable directly press 'Home' to open)
5.	Bluetooth connect to device A, then select another mode to connect to device B, then back to connect to device A, please cancel or delete the original connection name in advance, re-select the Bluetooth mode and reconnect.
6.	Connects successfully, shuts down, and the next time it is turned on and used If the controller does not find the connected device, it will start a reminder including a. Slow flashing of the controller's LEDs b. Continuous vibration c. Then the controller turns off In this case, please turn on the Bluetooth of the device in advance, or plug in the USB receiver, turn off an d select the mode to restart the controller.
7.	If the last connected device does not exist anymore, please select the desired mode to connect the new device again.

For Android Games

Android for games that support controllers (including cloud platforms), it is recommended to use Xbox con troller Bluetooth mode.

Some games also support Dual Shock Bluetooth mode, it is recommended to know the game instructions in advance.

Android V3 mode provides an additional supplement for games that do not support controllers.

But you need to install additional mapping APP and need to patiently set up the game to simulate the phone screen movements to the controller's buttons or joystick.

For Apple iPhone & iPad Games

y. Xbox Bluetooth mode is only available for apple arcade and MFi games (including cloud platform) Some games also support Dual Shock Bluetooth mode, it is recommended to know the game description in advance.

apple does not support V3 direct connection mode (it does not work well)

- * Bluetooth can be used at a distance of 26 feet, please note that there are no large obstacles blocking the signal in a straight line.
- * If the power supply of the front USB port of the PC is insufficient, it will affect the 2.4G wireless transmi ssion distance, and it needs to be used close to the interface range. (Note this issue when assembling the PC front panel USB).

Documents / Resources



Wuzcon X2B Game Controller [pdf] User Guide

Wuzcon, Wuzcon, Wireless, Controller, for, iPhone, Android, Windows, Mac, PS3 4, S witch., Xbox, and, DualShock, Dual, Bluetooth, Gamepad, for, Mobile, Phone, xCloud, Playstati on, Remote, Play, Gaming, More, B0BGH7FVRV, B0B5N7V9HP, B0B5N85R4S, X2B Game Controller, X2B, Game Controller, Controller

Manuals+, home privacy