

xonTel LT-02 Smart WIFI Light Switch Instructions


[Home](#) » [XonTel](#) » xonTel LT-02 Smart WIFI Light Switch Instructions 

Contents

- 1 xonTel LT-02 Smart WIFI Light Switch
- 2 Product Information
- 3 Usage Instructions
- 4 Product Configuration
- 5 Specifications
- 6 LED State
- 7 Get Started with Tuya Smart App
- 8 What's the App User Interface Like
- 9 Experience Advanced Features
- 10 Documents / Resources



xonTel LT-02 Smart WIFI Light Switch

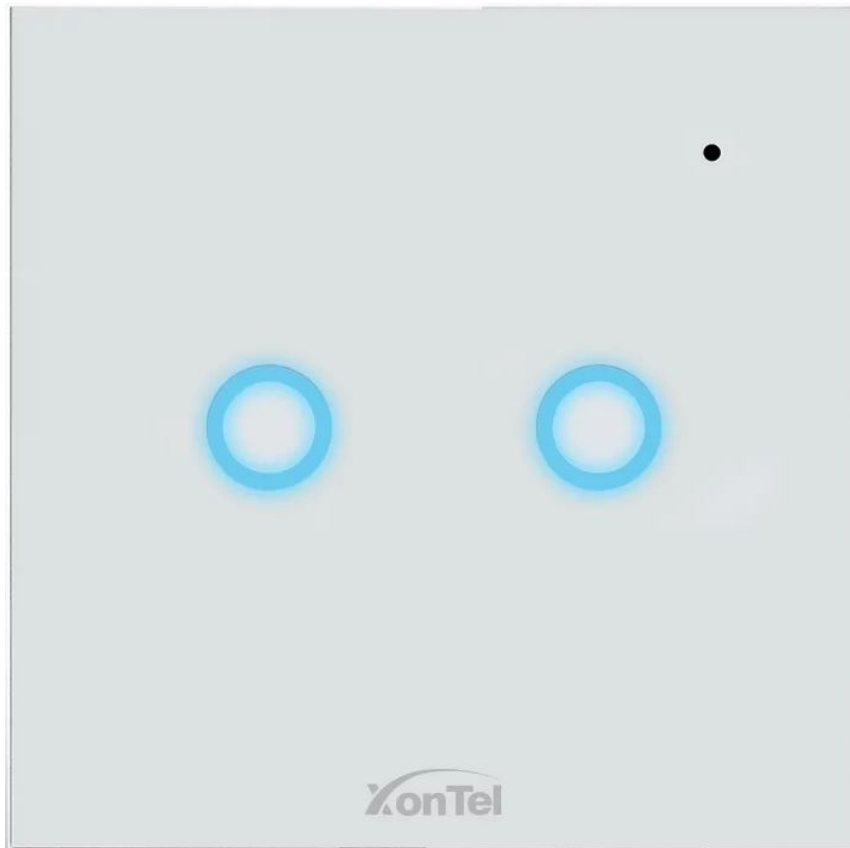

Product Information

The WiFi Smart Home Sensors come with a Light Switch that can be controlled through the Smart Life app. The product has an LED light, live wire input, output neutral wire input, and a button. The LED state indicator can show the device status, smart Wi-Fi AP mode triggered, sleeping mode, and reset mode. The device can be reset by pressing the reset button for 6 seconds till the indicator flashes rapidly. It can also be reset to AP mode by pressing the reset button again for 6 seconds till the indicator flashes slowly.

Specifications

- **LED State Indicator:**
 - Flashes quickly
 - Flashes slowly
 - Rapidly blinks and goes off after the scheduled time
 - Indicator off
 - Lights up for 4s and goes off after 2 seconds, the device goes into configuration mode
- **Device Status:**
 - Smart Wi-Fi AP mode Triggered
 - Sleeping mode

Usage Instructions

To start using the WiFi Smart Home Sensors, follow these steps:


1. Download the Smart Life app from the App Store or Google Play to your mobile device.
2. Launch the Smart Life app and register by entering your mobile phone number or email address, creating a password, and logging in to the app. If you already have an account, simply log in.

3. Power on the smart sensor, which is set to Smart WiFi mode by default.
4. Select the '+' symbol on the top right-hand corner of the app.
5. Select your product type and follow the instructions on the app. If the connecting fails, try using AP Mode. On the Add Device page, select AP Mode in the top right-hand corner and follow the instructions of the app.
6. Once you have successfully connected the device, you can control it through the Smart Life app. You can turn it on or off, set a timing switch, and even connect it with other sensors via scene setting.

The Smart Life app also allows you to share the device with others, receive push notifications, and restore default settings or delete and add the device again to clear the record by APP.

Thanks for Choosing our WiFi Smart Home Sensors

Product Configuration

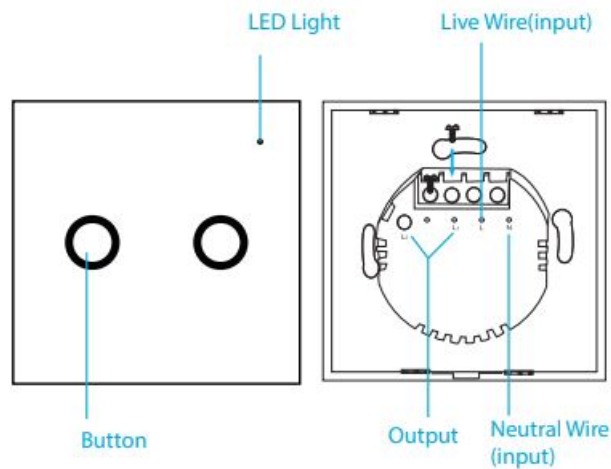

Specifications

- **Rated Voltage:** AC 85-250V, 50/60Hz
- **Max Current:** 2 outputs – Max 5A*2;
- **Wireless Type:** 2.4GHz
- **Wireless Standard:** IEEE 802.11b/g/n
- **Wireless Distance:** 40m (max)
- **Operate Temper:** 0°C ~ 40°C (32°F ~ 104°F)
- **Operating Humidity:** 20% ~ 85% non-condensing
- **Storage Temper:** 0°C ~ 60°C (32°F – 140°F)
- **Storage Humidity:** 0% ~ 90% non-condensing
- **Product Type:** EU– 1 / 2 / 3 Gang; US- 1 / 2 / 3 Gang
- **Product Size:** 86mm(L) × 86mm(W) × 34mm(H)
- **Support:** Amazon Alexa, Google Assistant

LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes quickly
AP mode	Indicator flashes slowly
Triggered	LED will rapidly blink, and OFF after scheduled time
Sleeping mode	Indicator OFF
Reset	The indicator lights up for 4s and after 2 seconds lights off, the device goes into configuration mode

Get Started with Tuya Smart App

1. Download APP

- Download the “Smart life” app from APP Store or Google Play to your mobile.




2. Register and Login

- Launch the “Smart life” app.
- To register, enter your mobile phone number or email address, create a password, then login to the app.
- Login if you have an account already.

3. Add Device

- Power on the smart sensor which default's mode is Smart WiFi mode.
- Select the “+” symbol on the top right-hand corner.
- Select your product type and follow the instructions of the app.
- If the connecting fails, try using AP Mode**
- On the “Add device” page select “AP Mode” on the top right-hand corner and follow the instructions of the app.
- Finally, have fun!

What's the App User Interface Like

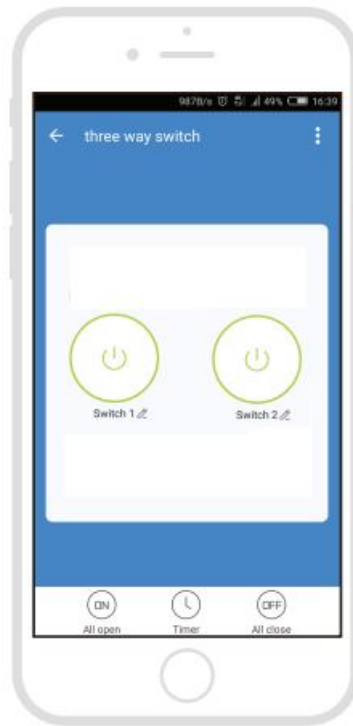

Smart life

Experience Advanced Features

- You can experience the various advanced features of the product with the app, just try and do it yourself.

Main function

- **Working status: on/off:** press one button only, the button in the app will turn to green when it is ON;
- All on or All off press the “All open” or “All close”
- Timing switch can be timed single or Multiple switch, and can set repeat cycle (30s delay)

Linkage alarm setting

- To connect two Sensors via scene setting.

Device sharing

- Allow others to control the device


Push notification

- Open/close push notification

Remove device

- Restore default settings; Delete and add the device again to clear the record by APP.

Documents / Resources

	<p>xonTel LT-02 Smart WIFI Light Switch [pdf] Instructions LT-02 Smart WIFI Light Switch, LT-02, Smart WIFI Light Switch, WIFI Light Switch, Light Switch, Switch</p>
---	---

[Manuals+](#).