

Yealink DD10K Ruggedized DECT Handset Owner's Manual

Home » Yealink » Yealink DD10K Ruggedized DECT Handset Owner's Manual

Contents

- 1 Yealink DD10K Ruggedized DECT
- Handset
- 2 Specifications:
- 3 DD10K
- **4 Product Usage Instructions**
- 5 FAC
- 6 Documents / Resources
 - **6.1 References**
- **7 Related Posts**



Yealink DD10K Ruggedized DECT Handset



Specifications:

• Model: DD10K

• Product Name: Yealink Ruggedized DECT Handset

• Compatibility: Yealink SIP-T41S/T42S with FW 66.82.0.35 or later, SIP-T58A with FW V83 or later, SIP T53/T53W/T54W/T57W/T58W/VP59

• Key Features: Reliable Connection, Ease-of-use, Plug and Play, High Transmission Rate

Specifications	Description
Display	 1.8" 128×160 TFT color screen Intuitive user interface with icons and soft keys Caller ID with name and number Notification Light: voice mail, missed call Date & time (manual/auto synchronization) Screen saver Multilingual user interface Keypad backlight

	Up to 2 simultaneous calls per handset
	Handset select for receiving call
	Handset and number select for making call
	Auto intercom, auto answer
	3-way conference
	Call forward: Always/Busy/No Answer
	Call waiting, mute, hold
	• DND
	Call transfer
	Swap between calls
	• Redial
	Speed dial
Phone Features	Voice mail
	Silence
	Dial plan: Replace Rule/Area Code/Block Out
	Keypad lock
	Emergency call
	100 phone book memory (store in the base)
	Remote phonebook, LDAP, XML phonebook
	Phonebook search, blocklist
	Call history: All/Placed/Missed/Received (up to100 entries)
	Direct IP call without SIP proxy
	Reset to factory, reboot
	Anonymous call, anonymous call rejection
	OTA (Over-The-Air) upgrade via base station
	. Full duploy anagkarphana
	Full-duplex speakerphoneHD audio
	Hearing Aid Compatibility (HAC) compliant Fraguency responses 100 Hz, 7 kHz.
	Frequency response: 100 Hz–7 kHz END (Flevible Noise Reduction)
Audia Faaturaa	FNR (Flexible Noise Reduction) Page in a value of a section.
Audio Features	Receiver volume control: 5 steps Pinger volume control: 5 steps Officers volume control: 5 steps
	Ringer volume control: 5 steps+off Oringer moledies
	9 ringer melodies Multiple advisory toppe
	Multiple advisory tones According to the least better at the second secon
	Acoustic warning for low battery status
	• • DTMF

DECT	 DECT Transmission Rate: 1152 kbps/s 2 internal QWL omnidirectional antennas Power Consumption: 815 mW Frequency bands: 1880 – 1900 MHz (Europe), 1920 – 1930 MHz (US) DECT Range: Indoor Range: 20 m-50 m (The max distance is 50 m) Outdoor Range: 300 m (In clear view and ideal conditions)
Physical Features	 Interface: USB 2.0 Dimension: 73 mm x 27 mm x 8 mm Weight: 2 g

Package Features	 Package contents: DD10K DECT USB Dongle Quick start guide Qty/CTN: 80 PCS Giftbox size: 136 mm x 70 mm x 40 mm Carton meas: 443 mm x 305 mm x 285 mm N.W: 4.0 kg G.W: 4.6 kg
Compliance	CE FCC Certification IC: 10741A-DD10

DD10K

Yealink Ruggedized DECT Handset

The Yealink DECT dongle DD10K not only enables T41S/T42S/T54W to work concurrently with the Yealink DECT system as a handset after pairing with Yealink W60B/W70B/W80B/W90B DECT IP base station, but also enables T53/T53W/T54W/T57W/T58A/T58W/VP59 to work as a base station which can be registered with up to 4 compatible Yealink W52H/W56H/W53H/W73H/W78H/W57R/W59R handsets. Supported by a powerful transmission rate of 1152kbps/s, this solution provides you with a quick and reliable DECT connection without wiring or cabling troubles, and gives you the privilege of enjoying wireless communications in minutes. As a complement to the Yealink DECT series, attaching DD10K to your desk phone offers a new solution by combining the desk phone's features with DECT capabilities. Yealink DD10K is easy and safe to deploy, guaranteeing a flexible and optimal user experience.

Key Features and Benefits

- Compatible with Yealink SIP- T41S/T42S with FW 66.82.0.35 or later, SIP-T58A with FW V83 or later and SIP T53/T53W/T54W/T57W/T58W/VP59
- Reliable Connection
- Ease-of-use
- Plug and Play
- High Transmission Rate

Use Scenario of DD Phone (T54W+DD10K)

- Warehouse
- Supermarket
- Restaurant
- Others



Product Usage Instructions

Display:


The handset features a clear display for easy navigation and viewing of information.

Phone Features:

- Audio Features: High-quality audio for clear communication.
- **DECT:** Digital Enhanced Cordless Telecommunications technology for reliable wireless communication.
- Physical Features: Rugged design for durability in various environments.

Package Features:

The package includes all necessary components for setting up and using the handset.

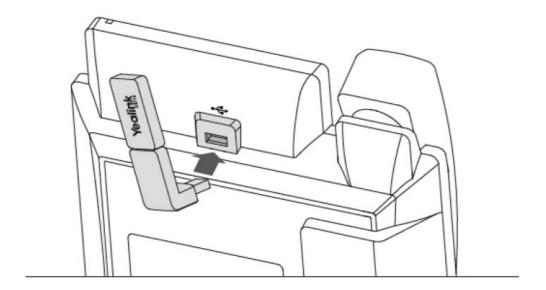

Click Here to go to the product introduction on the Yealink official website.

FAQ

Q: What Yealink phone models are compatible with the DD10K?

A: The DD10K is compatible with Yealink SIP-T41S/T42S with FW 66.82.0.35 or later, SIP-T58A with FW V83 or later, and SIP T53/T53W/T54W/T57W/T58W/VP59.

Q: In what scenarios can the DD Phone (T54W+DD10K) be used?

A: The DD Phone can be used in warehouses, supermarkets, restaurants, and other similar environments where a ruggedized DECT handset is required.

Documents / Resources



Yealink DD10K Ruggedized DECT Handset [pdf] Owner's Manual

DD10K, DD10K Ruggedized DECT Handset, Handset, DECT Handset, DD10K DECT Handset, Ruggedized DECT Handset

References

- Yealink DD10K USB Dongle for Bluetooth Headsets Accessories | Yealink
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.