



zero 88 Gateway 8 Flexible DMX Instructions

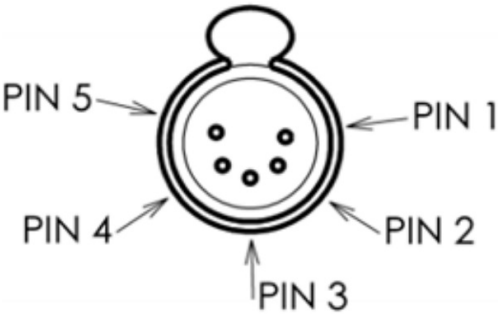
[Home](#) » [zero 88](#) » zero 88 Gateway 8 Flexible DMX Instructions 

zero 88 Gateway 8 Flexible DMX Instructions



Gateway 8 can output a maximum of eight Universes of DMX512 data. There are eight DMX/RDM output ports with female XLR5 connectors.

If network data or connectivity is lost, the device will hold last state.

DMX Connector	Pin	Description
	1	COM
	2	DMX –
	3	DMX +
	4	Not Connected
	5	Not Connected

Contents

[1 Universe Addressing](#)

[2 Documents / Resources](#)

[2.1 References](#)

Universe Addressing

The universe (Port Address) is used to uniquely identify the DMX data on the network. Art-Net allows universe numbers in the range 0-32767. sACN allows universe numbers in the range 1-65535.


For the avoidance of cross-protocol confusion, users are advised to number universes from 1.

sACN universes 0 & 64000 – 65535 are reserved.

When configuring sACN port numbers using Art-Net, you will not be able to configure between 32768 & 65535.



Documents / Resources

	zero 88 Gateway 8 Flexible DMX [pdf] Instructions Gateway 8 Flexible DMX, Flexible DMX, DMX
--	--

References

- [User Manual](#)