




Zhuhai Quin Technology D1600D Portable Label Maker Instruction Manual

[Home](#) » [Zhuhai Quin Technology](#) » Zhuhai Quin Technology D1600D Portable Label Maker Instruction Manual 


Zhuhai Quin Technology D1600D Portable Label Maker

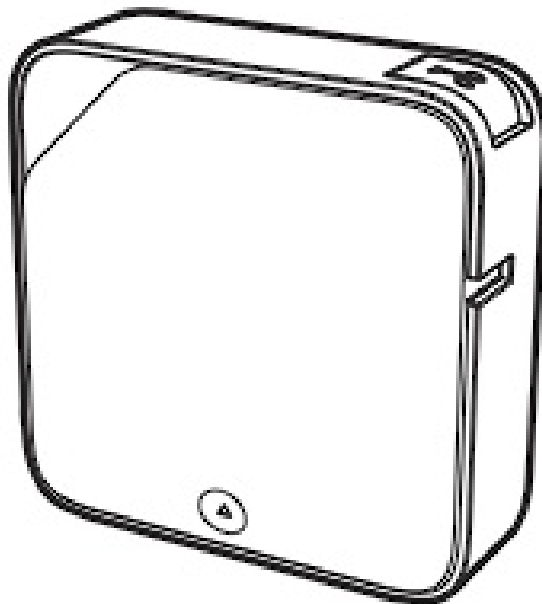

Contents

- 1 Item Checklist
- 2 Specifications
- 3 Product Introduction
 - 3.1 Parts Introduction
 - 3.2 Power and Indicator Light
- 4 How to Install the Label Tape
 - 4.1 Power Source 1: Dry Cell Batteries (6 AAA Batteries)
 - 4.2 Power Source 2: USB Cable
- 5 Downloading the App
- 6 Connecting the label maker
- 7 How to Print
- 8 Print Head Maintenance
- 9 Troubleshooting
- 10 Documents / Resources
 - 10.1 References
- 11 Related Posts

Item Checklist



Label Maker



Label Tape



USB Cable



Instruction Manual




The number of label tapes in the package is subject to actual shipment.

Specifications

Name	Portable Label Maker
Model	D1600D
Technology	Thermal Transfer Printing
Label Width (Max)	12mm
Resolution	203dpi
Print Head Lifespan	50KM
Communication Port	Bluetooth
Product Dimensions	128*128*51.5mm (5*5*2 inch)
Power Input	5V= 2A
Power Supply	Alkaline Battery
	Type-C
OS Supported	iOS
	Android

Product Introduction


Parts Introduction

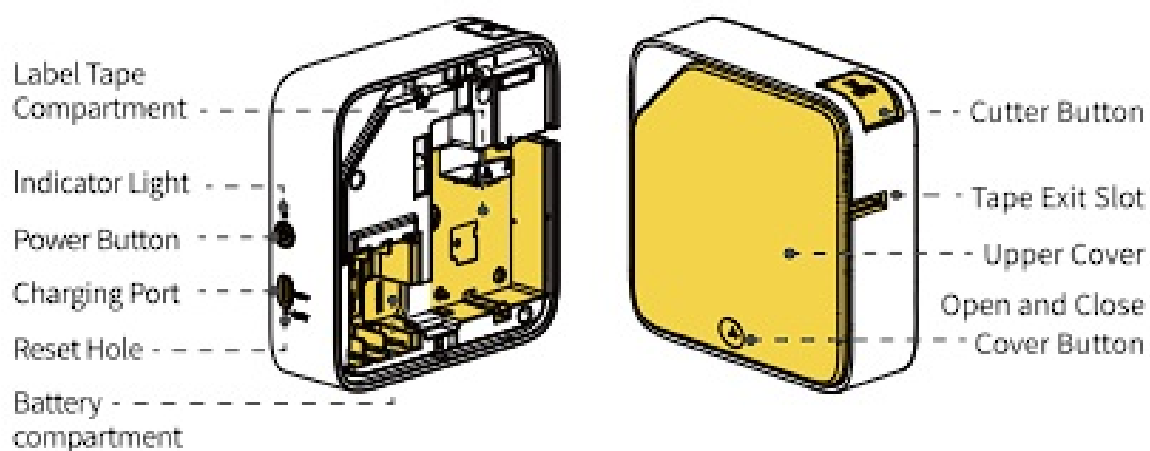




Power and Indicator Light

Power button description

Button	Operation	Functions
Power button	Hold for 3 seconds	Power on/off
	Press twice	Print diagnostic page




Indicator Light

 Green light stays on	Normal
 Red Light stays on	Error (No Label Tape)
 Red Light flashes quickly	Exhausted Battery or No Label Tape


How to Install the Label Tape

Power Source 1: Dry Cell Batteries (6 AAA Batteries)


1. Press the “” button to open the label tape compartment cover of the label maker.

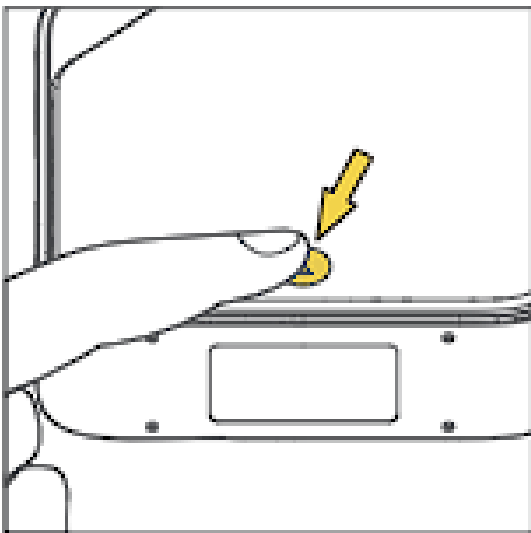


2. Please install the batteries according to the polarity marks in the battery compartment.

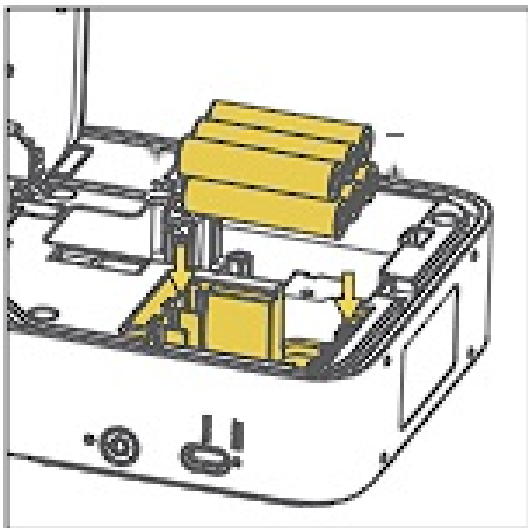

3. Long press the power button for 3 seconds to turn on the label maker.

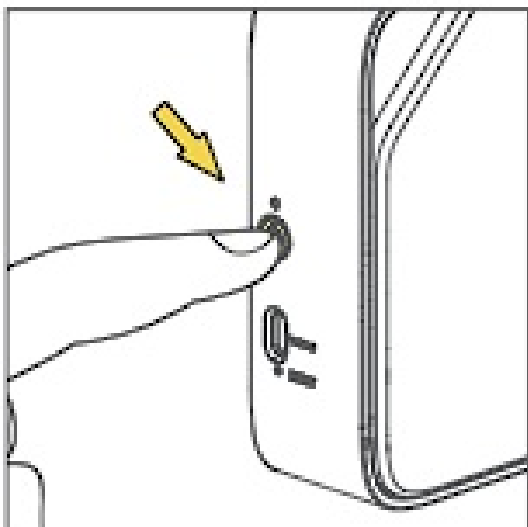


4. Make sure that the label and ribbon are taut across the mouth of the cassette and that the label passes between the label guides.

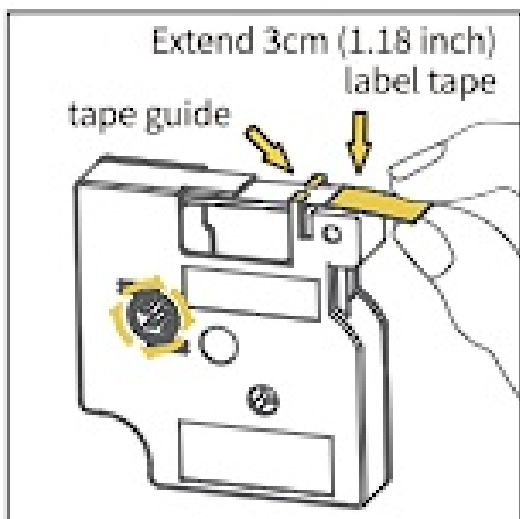


If necessary, turn the wheel in the direction of the arrow twice to tighten the carbon tape.

5. Install the label tape as instructed and press firmly, and make sure the extended tape passes through the outlet

of label maker.

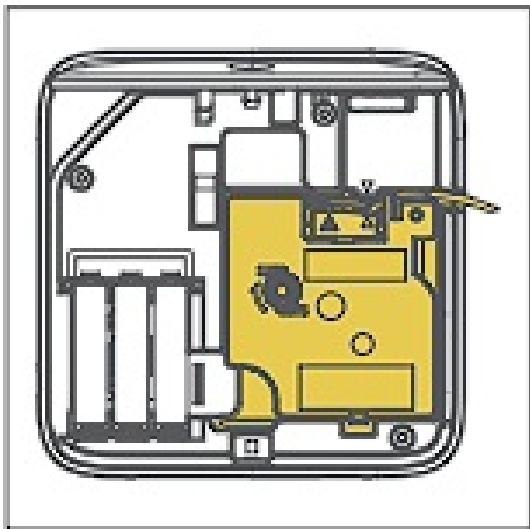


6. Press the “⏻” button on the label tape compartment cover to close the cover.

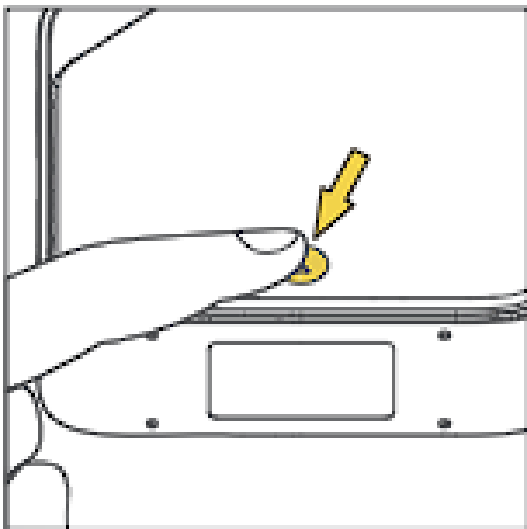


- A: This product can be powered with a USB cable or dry cell batteries. However, it can not be charged.
- B: To prevent damages from battery leakage, please remove the Batteries after use.
- C: When replacing batteries, please replace all batteries at once.

Power Source 2: USB Cable

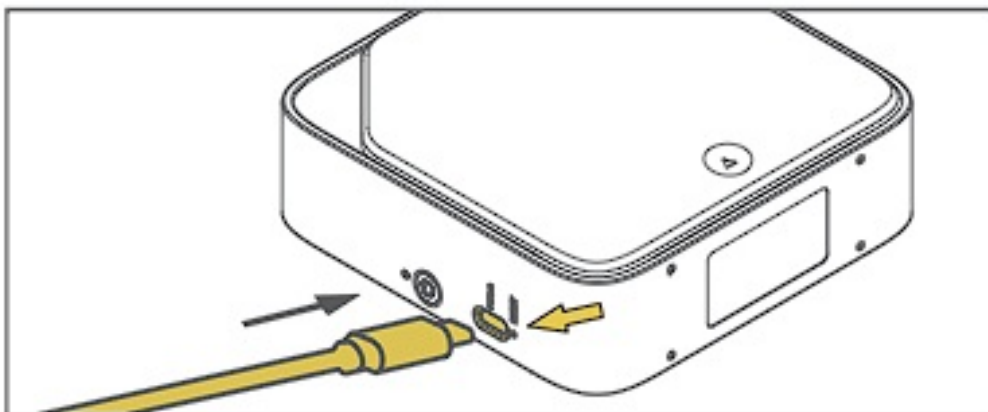

Downloading the App

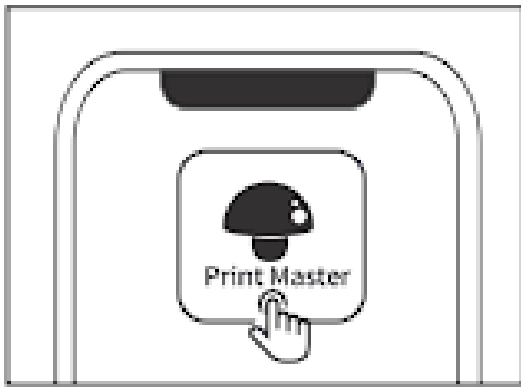

- This product must be used with the App.
- You need to connect the label maker through the Print Master app.
- In compliance with Google's requirement, Android phones must enable GPS (Location Services) before using Bluetooth.

Method 1:

Use your phone to scan the QR code to install the App.



Method 2:

Search for "Print Master" in the app store on your phone to download the App.




Connecting the label maker

1. Turn on GPS (Location Services) (Android devices only).




2. Open Print Master.

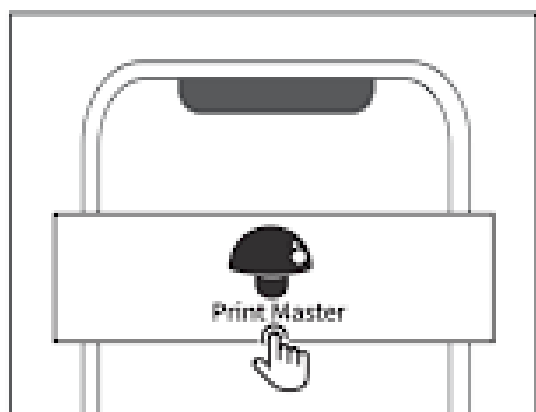

3. Tap the “**Connect now**” button to search for your device.



4. Press “Start using”.

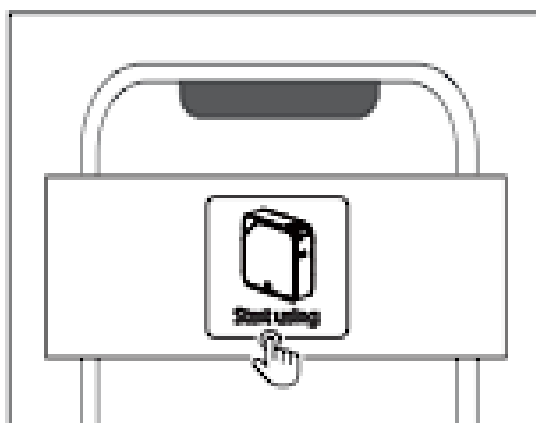





- In compliance with Google's requirement, Android phones must enable GPS (Location Services) before using Bluetooth.
- Before connecting to your device in Print Master, please make sure your printer is turned on and your phone's Bluetooth is on.

How to Print


1. Press "New" to start editing.

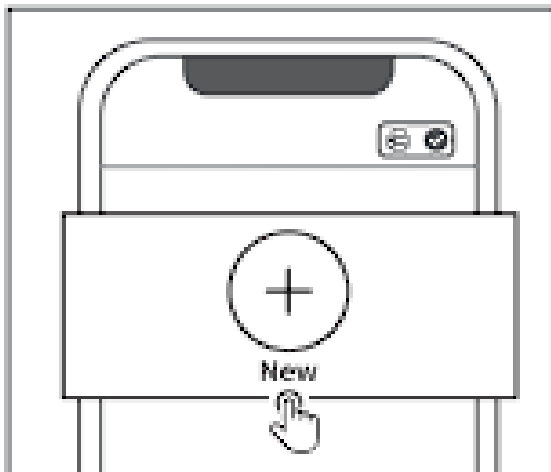

2. After the printing is complete, press the cutter button and take out the label.

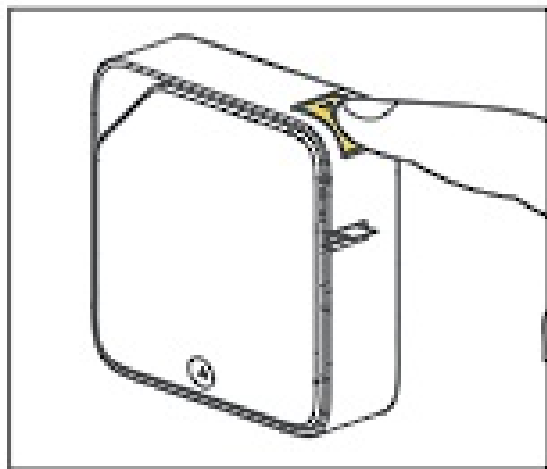


3. Remove the backing from the label to expose the adhesive, and then attach the label.

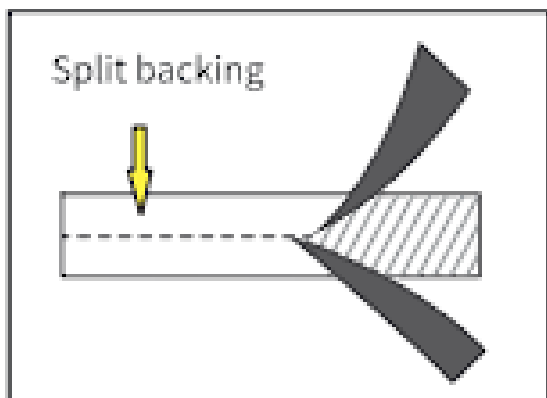


Print Head Maintenance


1. Turn off the label maker.

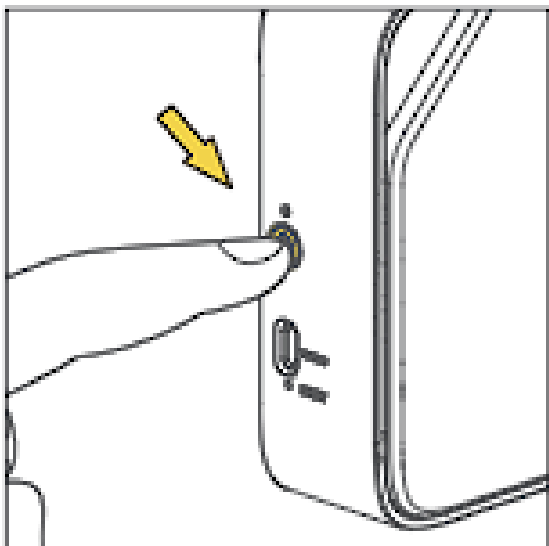


2. Use a cotton bud with a little ethyl alcohol.

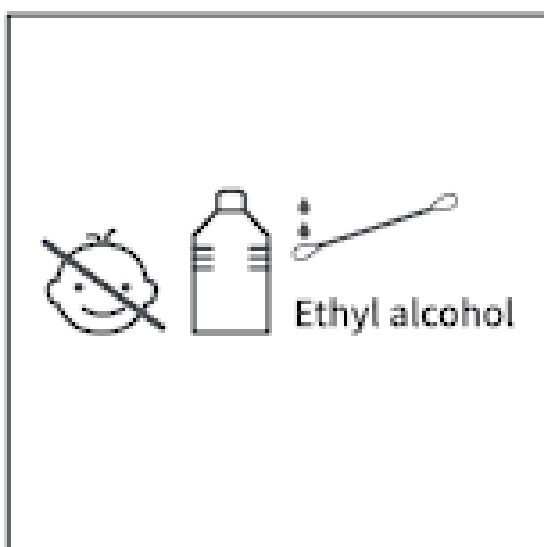

3. Gently wipe the print head.

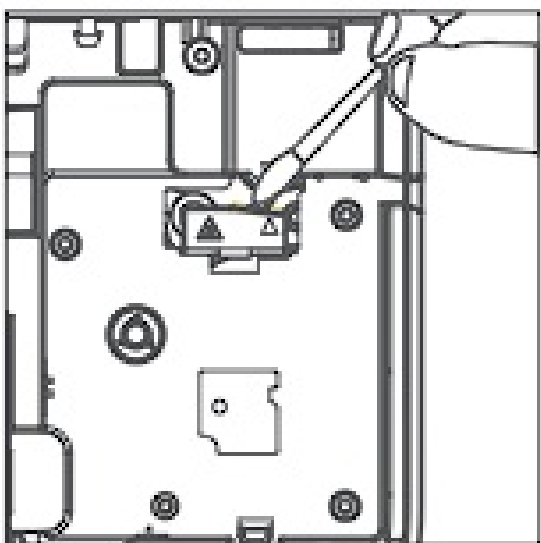

4. After the alcohol has dried off, turn on the label maker and press the power button twice to print the diagnostic page.

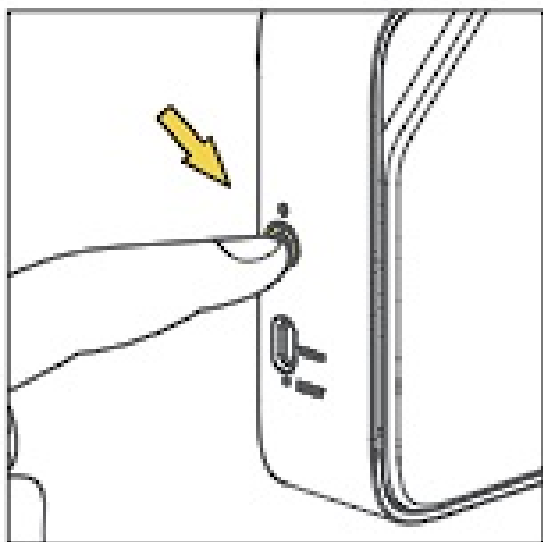

Please do not scratch the print head with any hard object. If the print head is damaged, the label maker will not print properly.

Troubleshooting

Problem	Solution
Unable to start the label maker	<ol style="list-style-type: none"> 1. Check if the batteries are installed properly with the correct polarity. 2. Replace the batteries. 3. Make sure the USB cable is connected to a power source and the power source is on.
Cannot print or the texts are not displayed correctly	<ol style="list-style-type: none"> 1. Check if the label tape is installed correctly. 2. Check if the paper compartment cover is closed. 3. Check if the label tape is exhausted.
There is a white horizontal line in printed labels	<p>The Printhead may be dusty. Take out the label tape, gently wipe the print head vertically with a dry cotton swab.</p> <p>Warning: Please do not touch the print head with your hand to avoid getting burned.</p>
Unable to print using my phone	Check if Bluetooth is enabled on your phone and make sure to connect the printer through the App

Documents / Resources



[Zhuhai Quin Technology D1600D Portable Label Maker](#) [pdf] Instruction Manual
D1600D, 2ASRB-D1600D, 2ASRBD1600D, D1600D Portable Label Maker, D1600D, Portable Label Maker

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.