



zidoo Z9X 4K HDR Media Player 4K 1080P Android Box Instructions

[Home](#) » [Zidoo](#) » zidoo Z9X 4K HDR Media Player 4K 1080P Android Box Instructions 

Contents

- [1 Z9X 4K HDR Media Player 4K 1080P Android Box](#)
- [2 3. Mobile phone control APP](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

Z9X 4K HDR Media Player 4K 1080P Android Box

Instructions


BT Download

Zidoo RTD1619DR series models Z9X Z10pro Z1000Pro do not have an OPENWRT system. If you want to use these media players for BT download, You could try tTorrent.


1. Installs tTorrent app on Zidoo media player and install Transdrone on cell phone via link below.

https://mega.nz/folder/sUhUHYzR#pASPkh_lInk2epx7Mml2dw


2. Switch the remote control to mouse mode by pressing “mouse” key on remote, then click the icon in the upper left corner of the main interface to set.

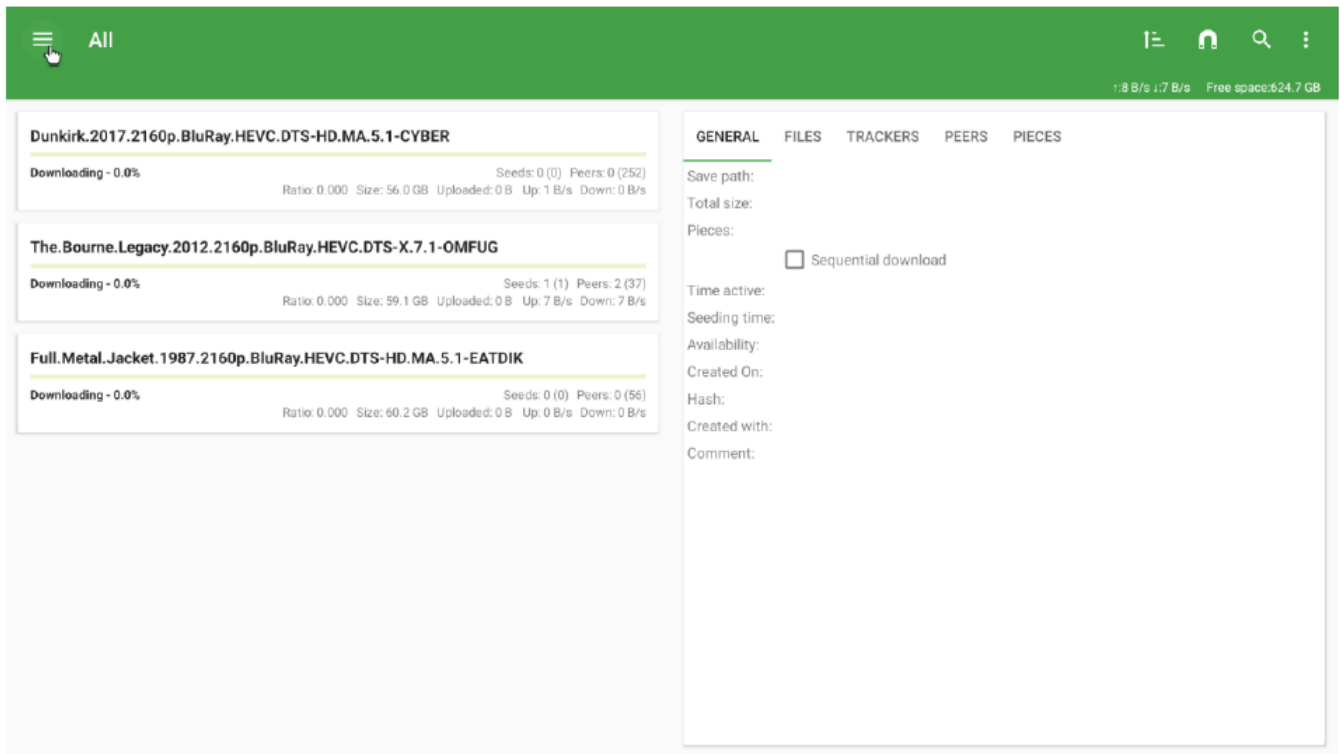

3. Select settings in the pop-up sidebar.

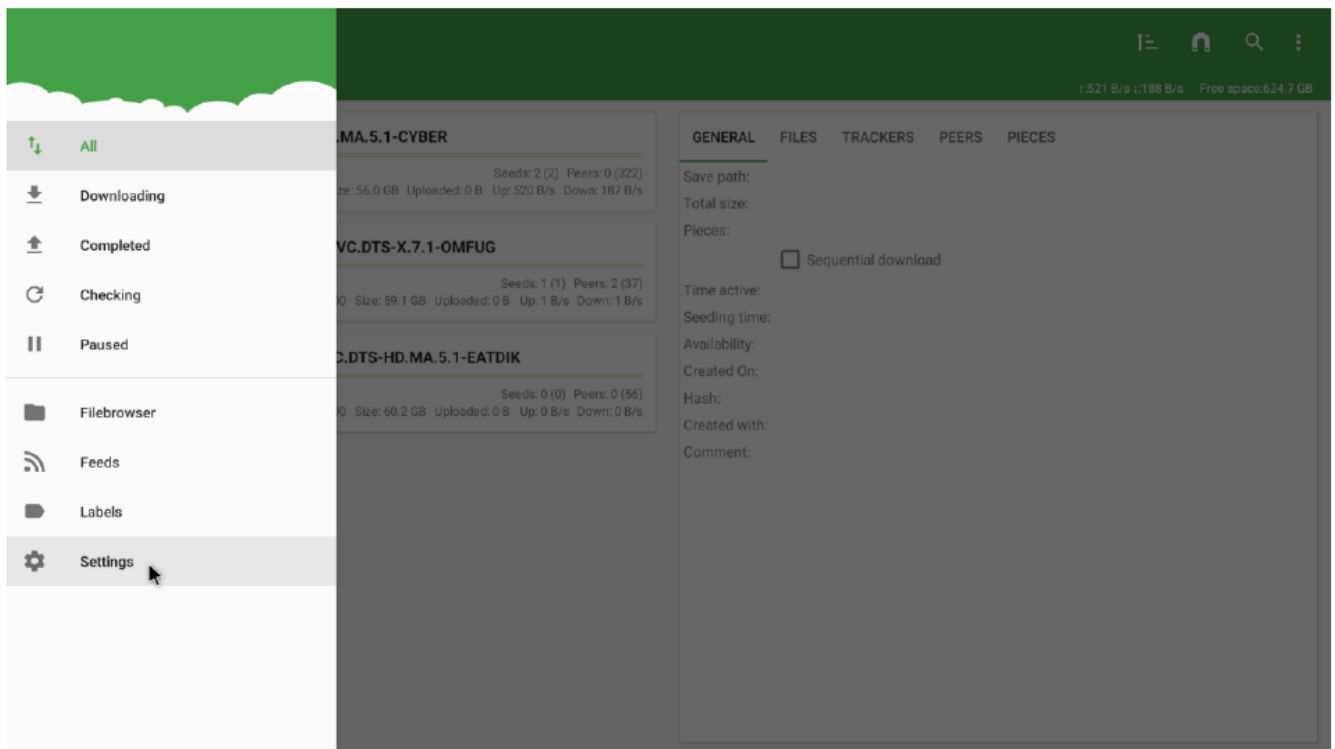


4. Set five items: Directory, Limits, Network setting, Interface and Web interface.

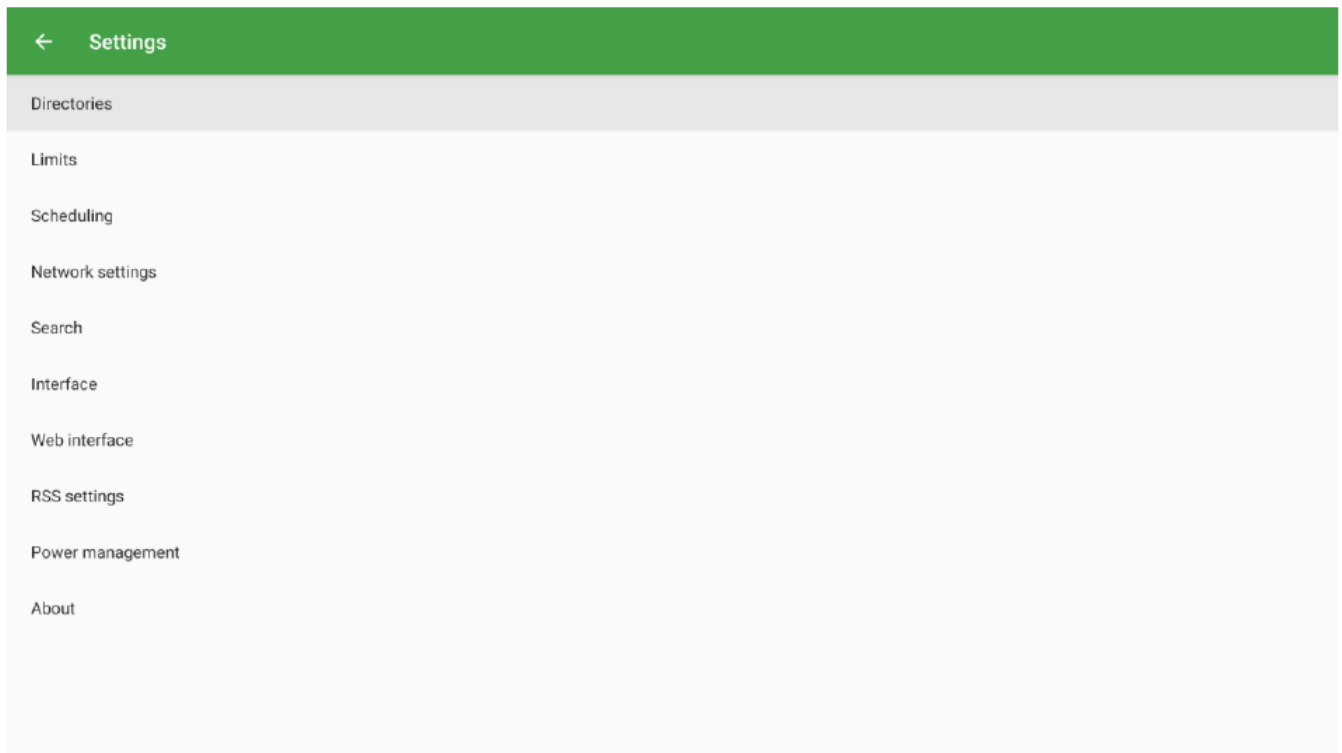

(1) Directory

Set the “Set save directory” to Zidoo external hard disk;

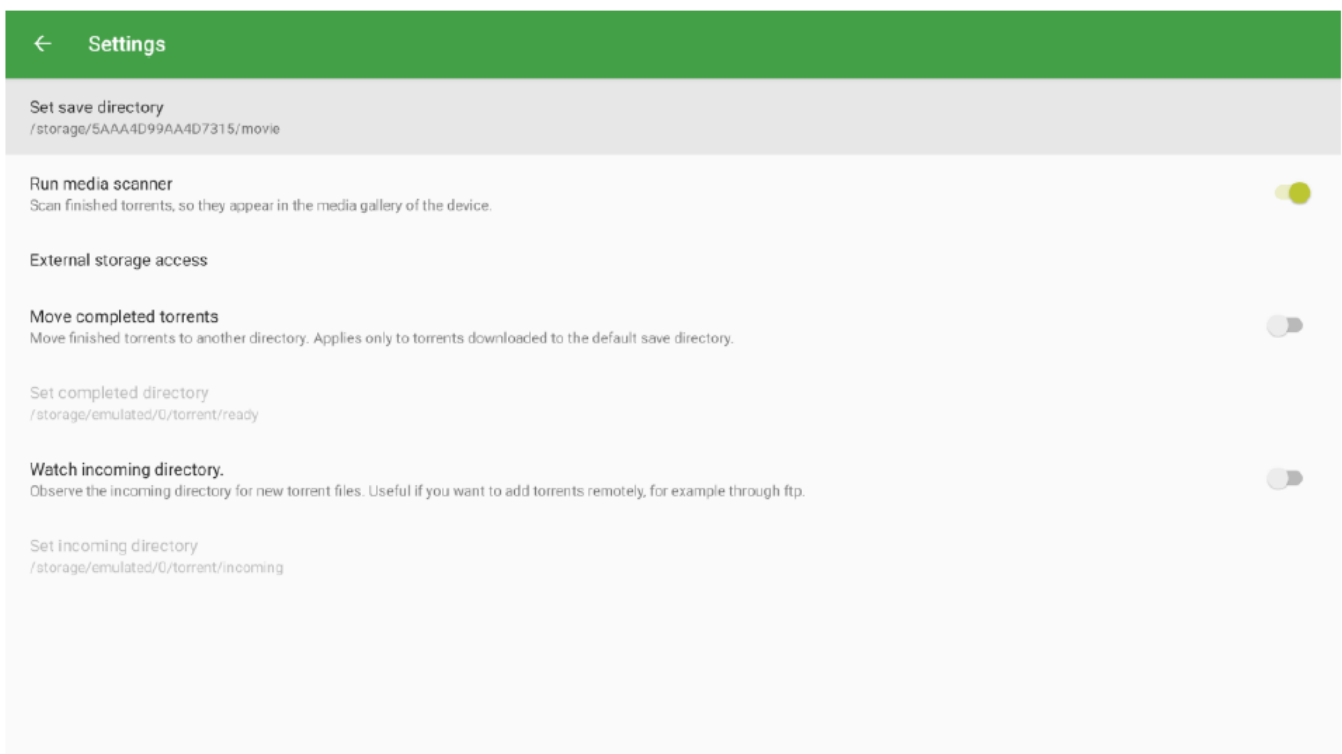


(2) limits

“Set max.active downloads” 5

“Set the active seeds “6

You can also set a larger number according to your own needs. It is suggested that the number of active needs are greater than the number of downloading tasks.

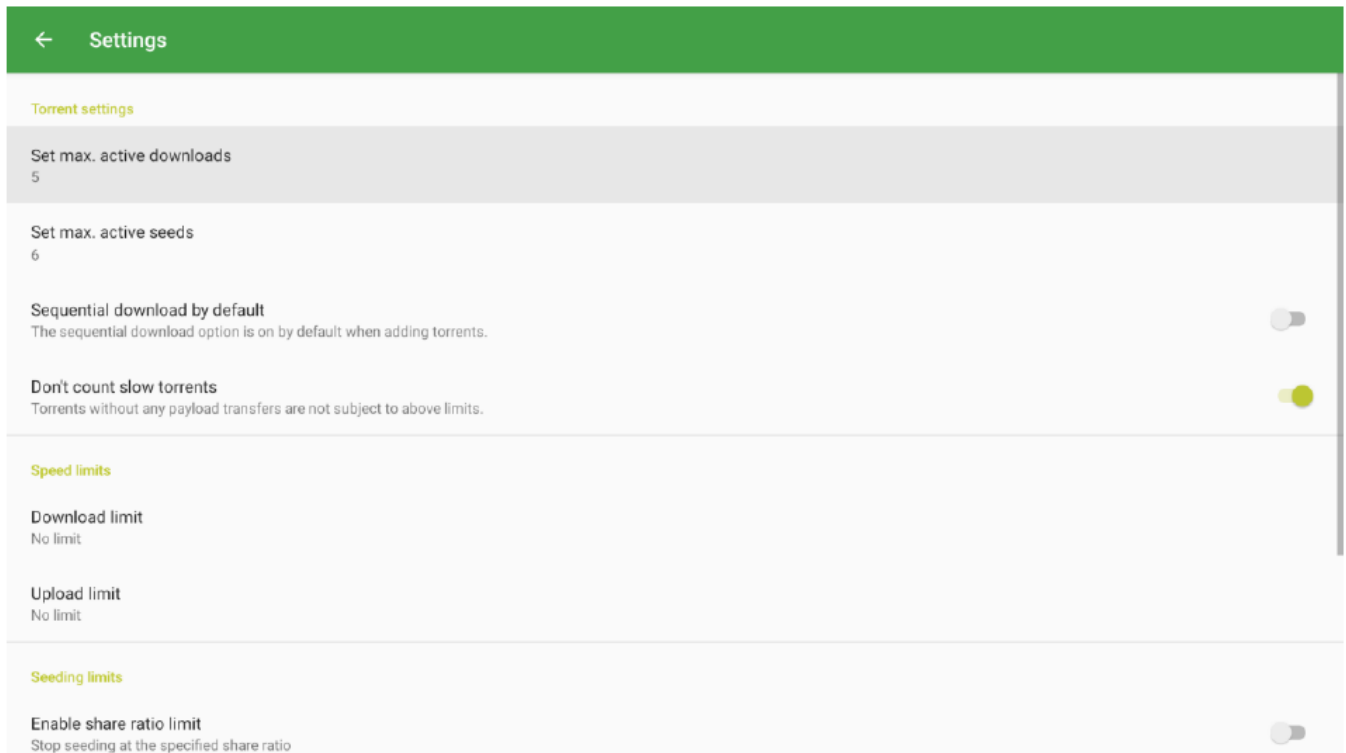

(3) Network settings

Set “Network Usage” to any available connection;


Set “Max. open connections” and “Max. incoming connections” to 64;

The public network IP user router forwards port 6890 for better connectivity;




(4) Interface

Change theme color

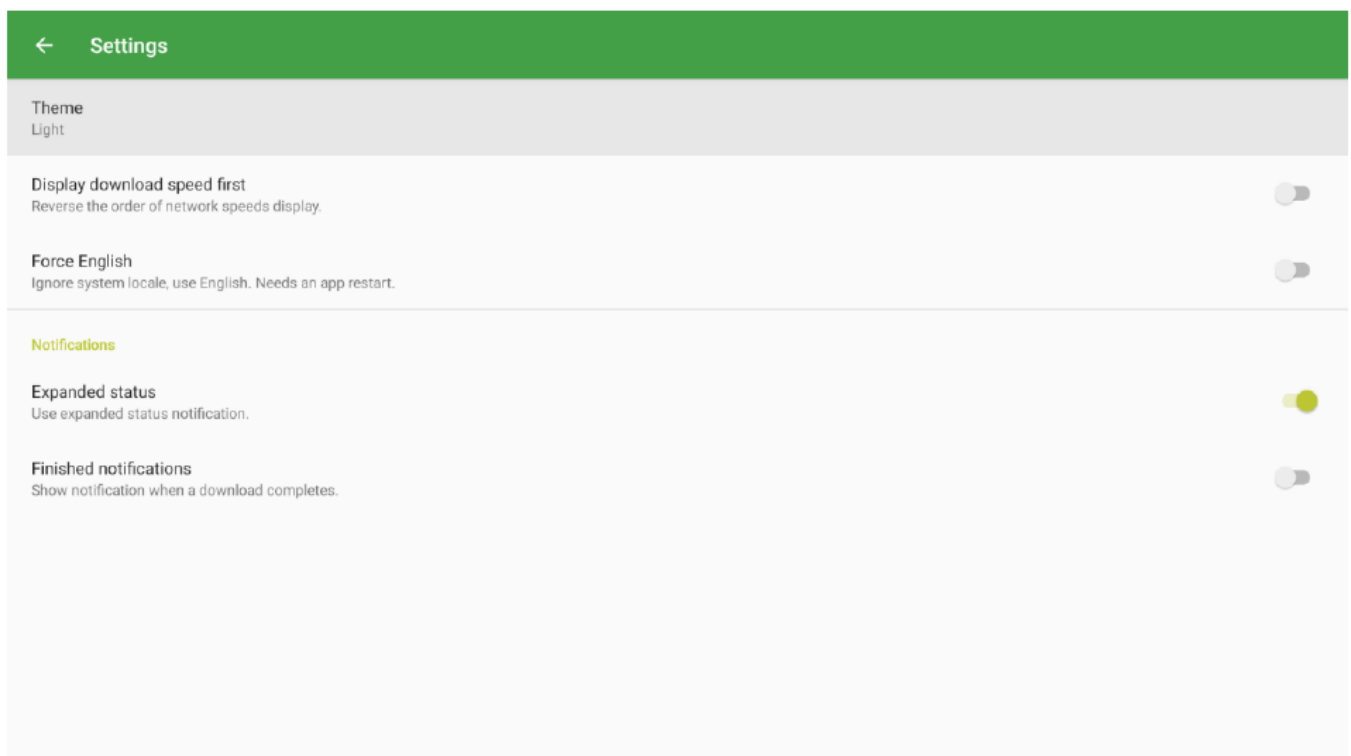


(5) Web interface


Enable the web interface and set web interface logging username and password.

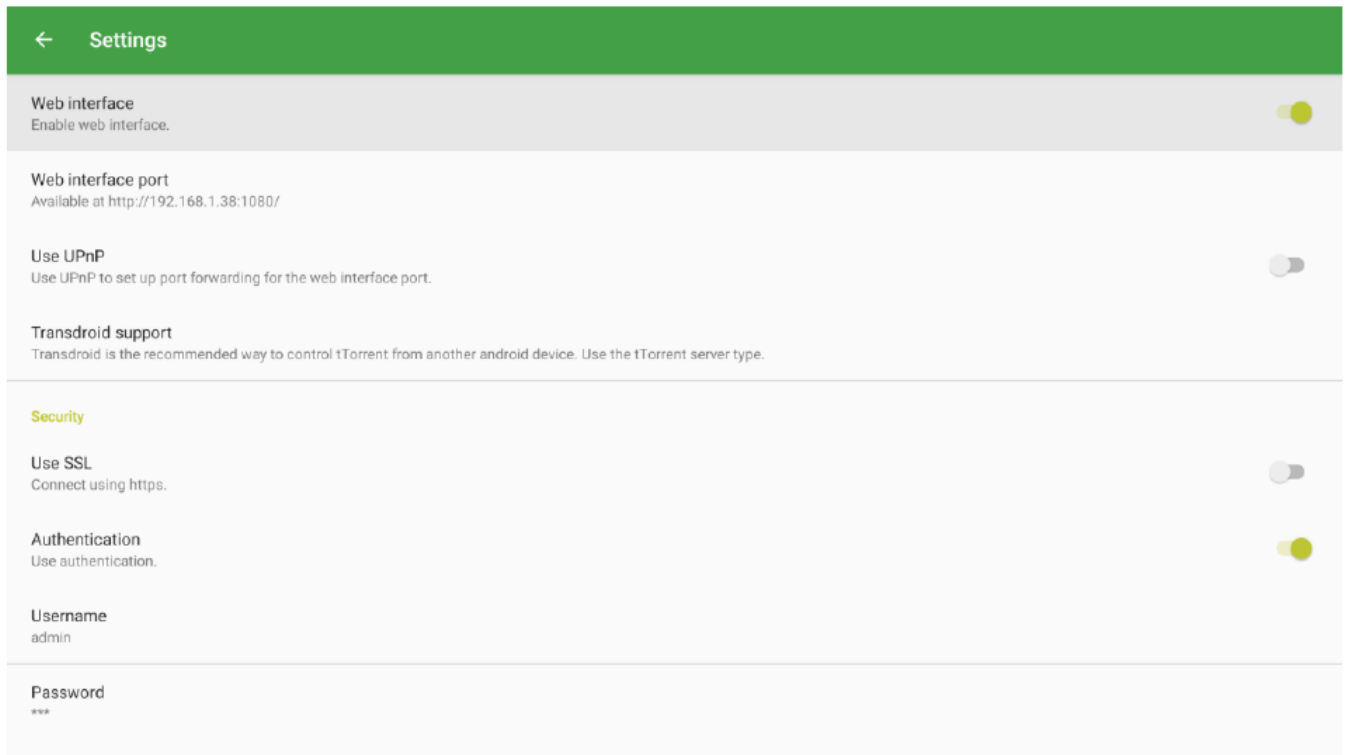

3. Mobile phone control APP

(1) Install Transdrone on the mobile phone, then enter into setting >Add server >Add normal, custom server

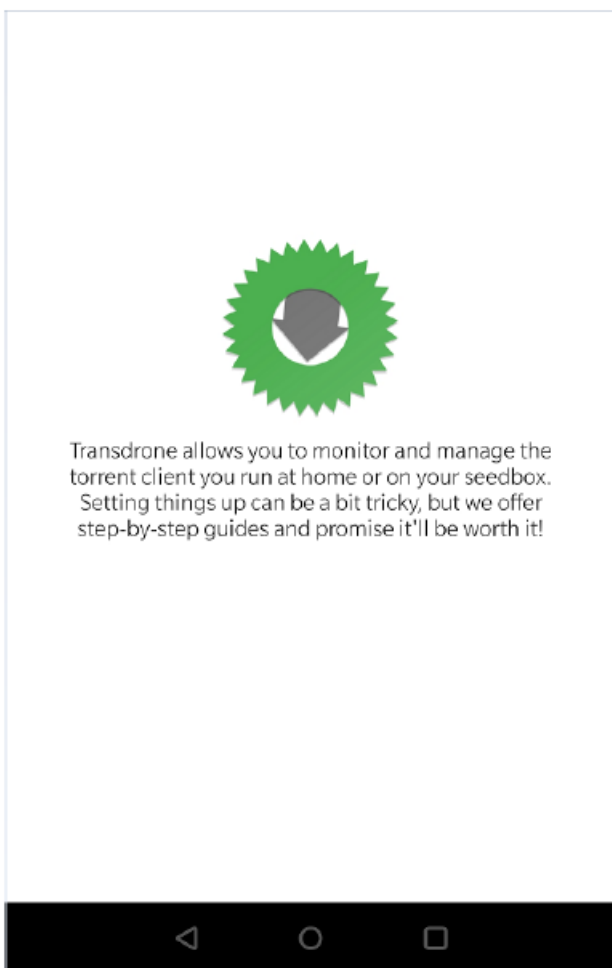

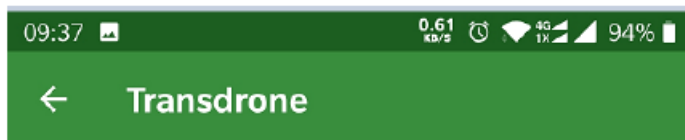

Servers

Add new server


Default server

Other settings

Background notifications

System

Transdroid help

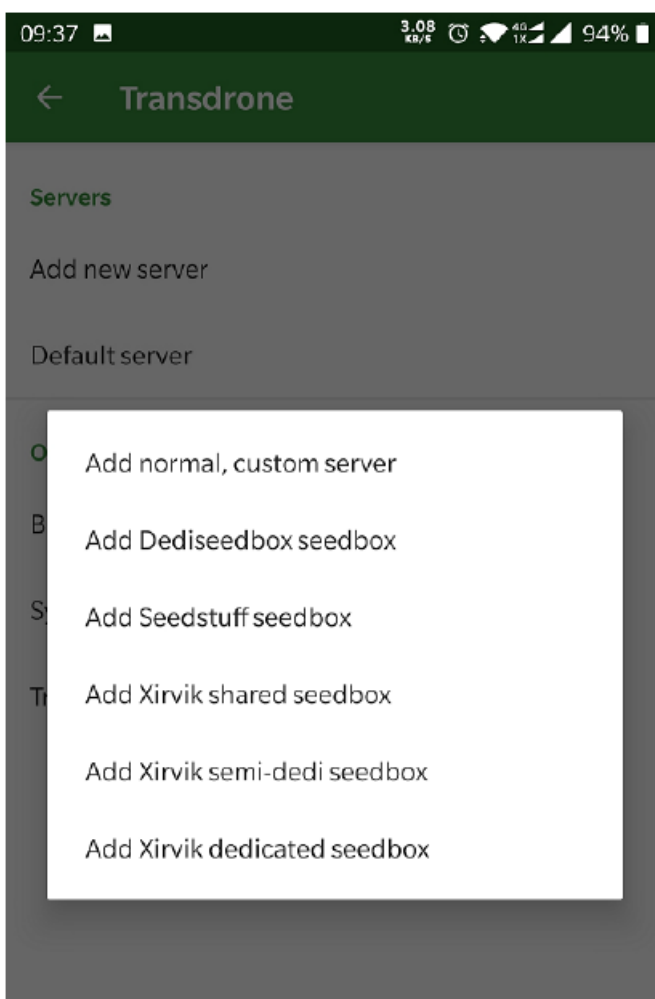

(2) Fill in the parameters set by tTorrent before.


Name: (Random)

Server type: tTorrent

IP and domain name: Zidoo's IP address or domain name


User and password: User name and password set in the tTorrent Web interface.

Name	Z9X
Server type	tTorrent
IP or host name	192.168.1.38
User name	admin
Password	
Secret token	
Advanced settings	
Optional settings	

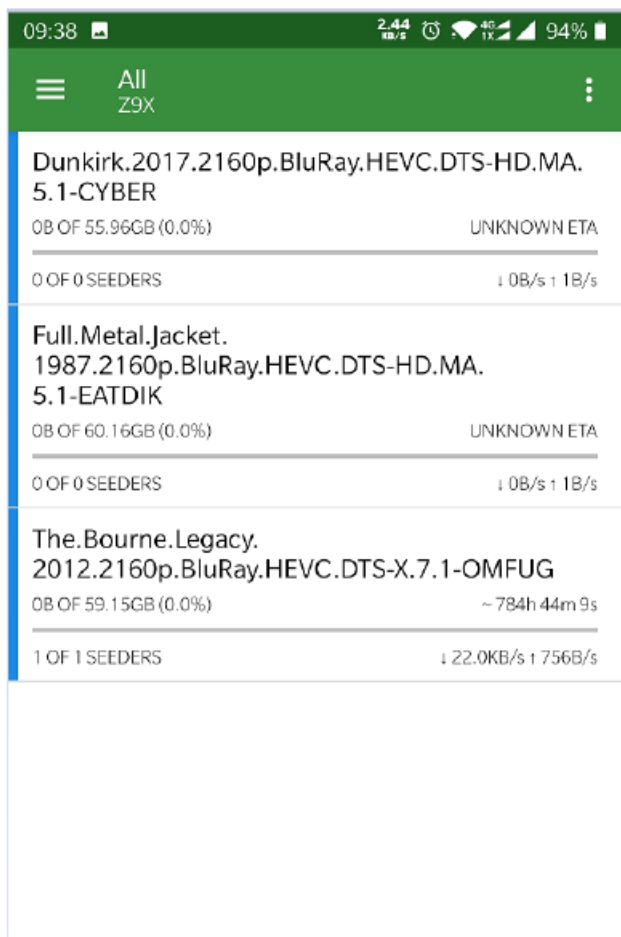

After setting as shown above, you can start downloading files.

Documents / Resources

	zidoo Z9X 4K HDRR Media Player 4K 1080P Android Box [pdf] Instructions Z9X, 4K HDRR Media Player 4K 1080P Android Box
---	--