

seenda 060B

seenda Multi-Device Bluetooth Keyboard (Model 060B)

INSTRUCTION MANUAL

[Setup](#)

[Operating](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

[Warranty & Support](#)

1. Setup

1.1 Unboxing and Package Contents

Before you begin, ensure all items are present in the package:

- seenda Multi-Device Bluetooth Keyboard
- USB Cable (for charging, if applicable, or for 2.4G receiver extension)
- Note: 2 AAA batteries are required and not included.



Image: The back of the keyboard, illustrating the battery compartment and the dedicated slot for the USB receiver.

1.2 Powering On

1. Insert two AAA batteries into the battery compartment located on the underside of the keyboard. Ensure correct polarity.
2. Locate the power switch on the top right edge of the keyboard. Slide the switch to the 'ON' position.



Image: An overhead view of the keyboard, highlighting the power switch (labeled '1') and other key features.

1.3 Pairing with Devices (Bluetooth)

The keyboard supports connecting up to two devices via Bluetooth.

1. Turn on the keyboard using the power switch.
2. Press and hold the **BT1** or **BT2** button for 3-5 seconds until the corresponding indicator light flashes rapidly. This indicates the keyboard is in pairing mode.
3. On your device (e.g., computer, tablet, smartphone), enable Bluetooth and search for available devices.
4. Select "seenda Keyboard" or a similar name from the list of found devices.
5. Follow any on-screen prompts to complete the pairing process. The indicator light will stop flashing once successfully paired.
6. Repeat these steps for a second Bluetooth device using the other **BT** button.

PAIR 3 DEVICES



Image: A detailed view of the keyboard's top right section, showing the '01' (2.4G), 'BT1', and 'BT2' device selection buttons.

Video: This video demonstrates the process of pairing and switching between multiple devices using the seenda Multi-Device Wireless Bluetooth Keyboard.

1.4 Pairing with Devices (2.4G USB Receiver)

The keyboard also supports connection via a 2.4G USB receiver for devices without Bluetooth or for a more stable connection.

1. Locate the USB receiver, typically stored in the battery compartment on the underside of the keyboard.
2. Plug the USB receiver into an available USB port on your computer or compatible device.
3. Turn on the keyboard.
4. Press the **01** button to select the 2.4G connection mode. The keyboard should automatically connect to the receiver.



Image: The seenda keyboard shown with its USB receiver, indicating its use for 2.4G wireless connection.

2. Operating Instructions

2.1 Switching Between Connected Devices

To switch between your paired devices, simply press the corresponding device selection button:

- Press **01** for the 2.4G USB receiver connection.
- Press **BT1** for the first Bluetooth device.
- Press **BT2** for the second Bluetooth device.

The keyboard will quickly switch its connection to the selected device.



Image: A user typing on the keyboard, with a monitor, tablet, and smartphone simultaneously connected and in use, demonstrating multi-device functionality.

2.2 Using the Integrated Phone Holder

The keyboard features an integrated slot at the top, designed to hold your smartphone or tablet, providing a convenient viewing angle while typing.

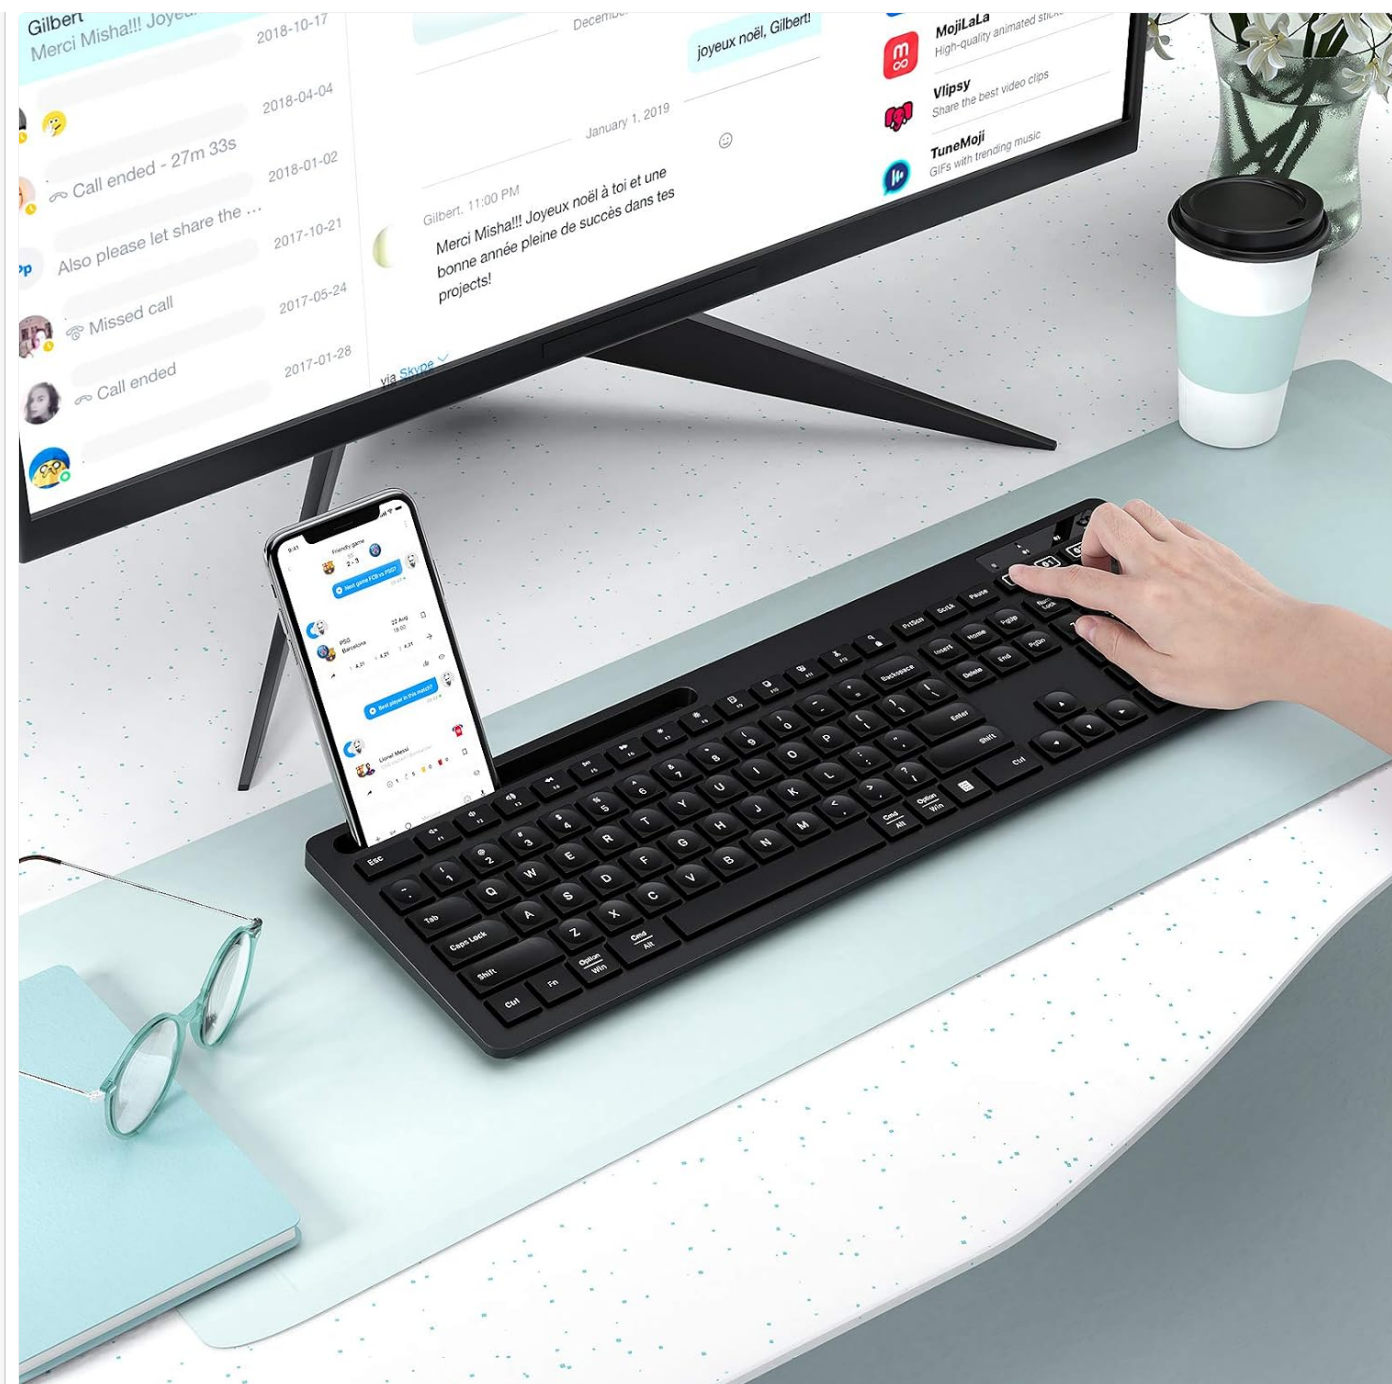


Image: The keyboard with a smartphone securely positioned in its built-in holder, ready for use.

2.3 Multimedia Shortcut Keys

The keyboard includes dedicated multimedia shortcut keys for quick access to common functions. These are typically located on the F-keys row.

- **Fn + F1-F12:** Access various multimedia and system functions such as volume control, playback, and screen brightness. Refer to the keycap legends for specific functions.

2.4 Operating System Layout Switching

The keyboard supports both Windows and Mac layouts. To switch between layouts:

- Press **Fn + Win** for Windows layout.
- Press **Fn + Option/Alt** for Mac layout.



Image: A close-up of the keyboard's modifier keys, indicating the options for switching between Mac OS and Windows layouts.

3. Maintenance

3.1 Cleaning Instructions

To maintain the keyboard's performance and appearance:

- Gently wipe the surface with a soft, damp cloth.
- Avoid using harsh chemicals or abrasive cleaners.
- The keyboard features a waterproof design, allowing for easy cleaning of spills. However, avoid submerging the keyboard in water.

3.2 Battery Replacement

When the keyboard's performance degrades or the indicator light signals low battery:

1. Turn off the keyboard using the power switch.
2. Open the battery compartment cover on the underside of the keyboard.
3. Remove the old AAA batteries.
4. Insert two new AAA batteries, ensuring correct polarity (+/-).
5. Close the battery compartment cover.

4. Troubleshooting

4.1 Common Issues and Solutions

- **Keyboard not connecting or unresponsive:**
 - Ensure the keyboard is powered on.
 - Check battery levels and replace if necessary.
 - For Bluetooth connections, ensure Bluetooth is enabled on your device and try re-pairing.
 - For 2.4G connection, ensure the USB receiver is securely plugged in and the keyboard is set to '01' mode.
 - Try connecting to a different USB port or device to rule out device-specific issues.
- **Keys not responding or typing incorrectly:**
 - Ensure the keyboard is connected to the correct device channel (01, BT1, BT2).
 - Clean around the affected keys to remove any debris.

- Restart the keyboard and the connected device.

- **Lag or delay in typing:**

- Ensure the keyboard is within the effective range of your device (typically up to 10 meters for Bluetooth).
- Minimize interference from other wireless devices.
- Check battery levels.

- **Incompatibility with PlayStation:**

- This keyboard is not designed for use with PlayStation consoles and may not function correctly.

5. Specifications

Brand	seenda
Model Number	060B
Product Dimensions	17.13"L x 5.63"W x 1.04"H
Connectivity Technology	Bluetooth, 2.4G USB
Compatible Devices	Laptop, PC, Smart TV, Smartphone, Tablet (Windows, Mac, Chrome OS, iOS, Android)
Material	Silicone (Enclosure)
Power Source	2 x AAA Batteries (not included)
Number of Keys	79
Keyboard Layout	QWERTY
Special Feature	Waterproof, Multi-Device Switching, Integrated Phone Holder

6. Warranty & Support

6.1 Warranty Information

This seenda product is covered by a standard manufacturer's warranty against defects in materials and workmanship. Please refer to the product packaging or the official seenda website for specific warranty terms and duration.

6.2 Customer Support

For technical assistance, troubleshooting, or further inquiries, please visit the official seenda website or contact their customer support team. Contact information can typically be found on the product packaging or the brand's website.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question