

FMOUSE M113

FMOUSE Slim White Wireless Bluetooth Mouse M113 User Manual

Model: M113

1. INTRODUCTION

This manual provides detailed instructions for the setup, operation, maintenance, and troubleshooting of your FMOUSE Slim White Wireless Bluetooth Mouse M113. Please read this manual thoroughly before using the product to ensure optimal performance and longevity.



Image 1: FMOUSE M113 Slim White Wireless Bluetooth Mouse

2. PACKAGE CONTENTS

Upon opening your package, please verify that all the following items are included:

- 1 x FMOUSE M113 Wireless Mouse
- 1 x USB Charging Cable (Type-C, 80cm/31.5in)
- 1 x USB Receiver (2.4GHz)
- 1 x Instruction Manual


What you get?




FMOUSE M113



USB charging cable
80cm / 31.5inch



USB receiver

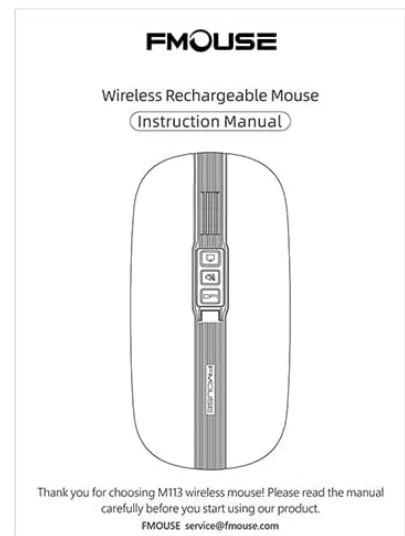

Instruction manual

Image 2: Package contents of the FMOUSE M113 mouse

3. SETUP

3.1 Charging the Mouse

Before initial use, fully charge the mouse using the provided Type-C USB cable. The charging port is located at the front of the mouse.

- **Charging:** The scroll wheel light will display red.
- **Charging Completed:** The scroll wheel light will turn off.
- **Low Battery:** The scroll wheel light will flash red.

Type-C Rechargeable Mouse



Image 3: Type-C charging port and battery indicators

3.2 Connecting the Mouse (Dual Mode)

The FMOUSE M113 supports two connection modes: 2.4GHz Wireless (via USB receiver) and Bluetooth 5.1. You can switch between modes using the selector switch on the bottom of the mouse.



Image 4: Dual connection options for the mouse

3.2.1 2.4GHz Wireless Connection (USB Receiver)

1. Locate the USB receiver stored in the magnetic slot on the bottom of the mouse.
2. Plug the USB receiver into an available USB port on your computer.
3. Slide the switch on the bottom of the mouse to the **2.4G** position (indicated by a USB icon).
4. The mouse should automatically connect to your device.

3.2.2 Bluetooth 5.1 Connection

1. Slide the switch on the bottom of the mouse to the **Bluetooth** position (indicated by a Bluetooth icon).
2. The scroll wheel light will flash, indicating it is in pairing mode.
3. On your device (e.g., MacBook, iPad, Laptop), navigate to the Bluetooth settings.
4. Search for available devices and select "FMOUSE M113" (or similar) to pair.
5. Once paired, the scroll wheel light will stop flashing and remain solid.

Your browser does not support the video tag. This video demonstrates the features and connectivity of the FMOUSE M113 mouse, including USB receiver storage, Type-C charging, special buttons for desktop return and

volume mute, and Bluetooth connection. It highlights the aluminum scroll wheel and silent click functionality.

Video 1: Overview of FMOUSE M113 features and connectivity

4. OPERATING THE MOUSE

4.1 Basic Functions

- **Left Click:** Primary selection and activation.
- **Right Click:** Accesses contextual menus.
- **Scroll Wheel:** Scrolls content vertically.

4.2 DPI Adjustment

The mouse features 4 adjustable DPI levels (800/1200/1600/2400) to customize cursor sensitivity. Press the **DPI button** (located near the scroll wheel) to cycle through the settings. The scroll wheel light color indicates the current DPI level.

- **800 DPI:** (Specific color may vary, refer to image)
- **1200 DPI:** (Specific color may vary, refer to image)
- **1600 DPI:** (Specific color may vary, refer to image)
- **2400 DPI:** (Specific color may vary, refer to image)

To turn the scroll wheel light on or off, long-press the DPI button for 2 seconds.

4 Adjustable DPI



800DPI



1200DPI



1600DPI



2400DPI

Long press 2 seconds to turn on/off the roller light.

Image 5: 4 Adjustable DPI levels and corresponding light indicators

4.3 Desktop Return Button

The mouse includes a dedicated **Desktop Return button**. Pressing this button will instantly minimize all open windows and return you to your computer's desktop. This feature is useful for quick privacy or task switching.

Desktop Return Button

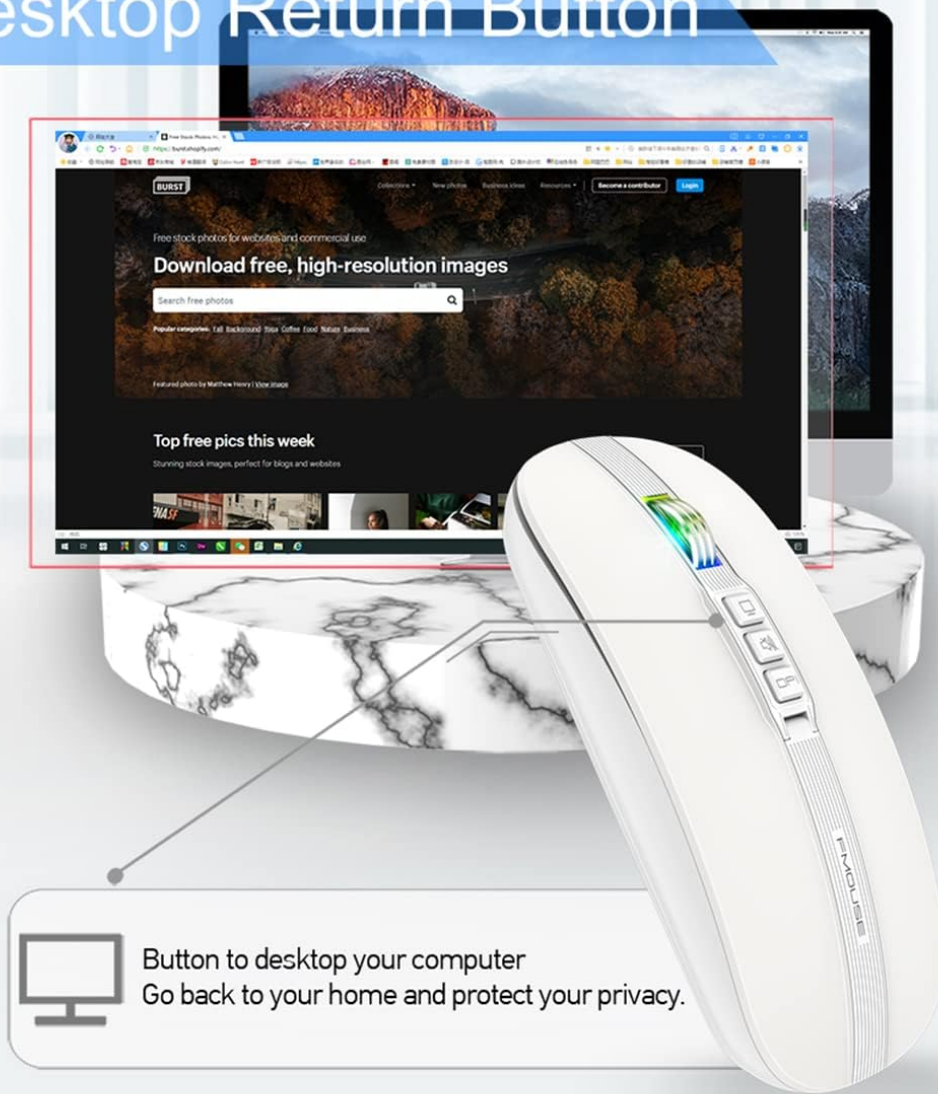


Image 6: Function of the Desktop Return button

4.4 Mute/Volume Control Button

The **Mute button** provides quick audio control:

- **Single Press:** Mutes or unmutes your computer's audio.
- **Long Press (2 seconds) and Scroll:** After a long press, you can adjust the computer's volume by scrolling the wheel up or down.

Quiet Button



Image 7: Mute and volume adjustment functions

4.5 Silent Click Feature

The FMOUSE M113 is designed with silent click buttons, reducing noise during use. This makes it suitable for quiet environments such as libraries, offices, or late-night work.

Silent Mouse

It can be used safely even in places such as libraries and offices, even at midnight, so as not to disturb others.

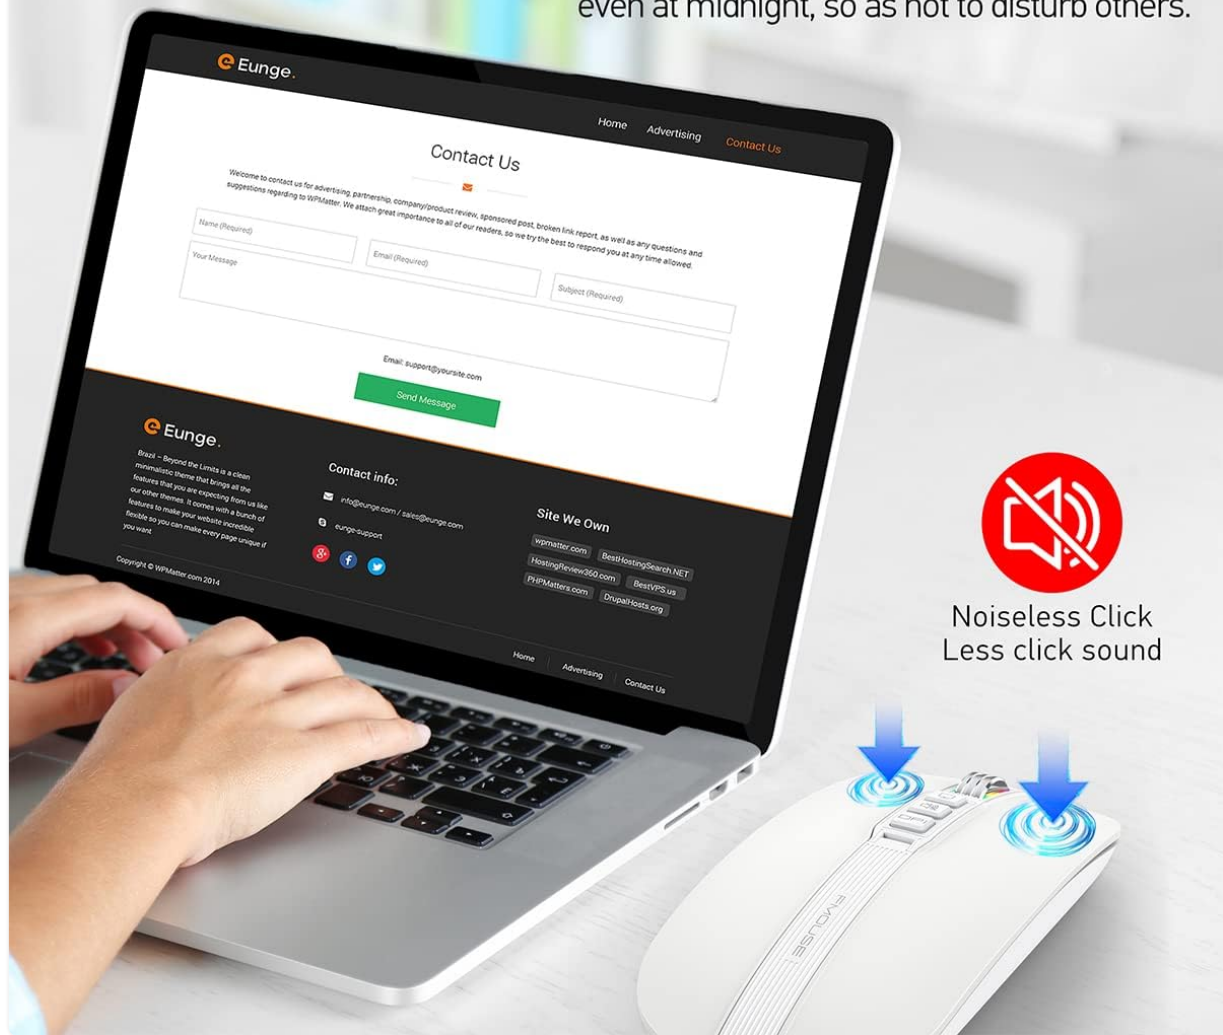


Image 8: Silent click feature of the mouse

5. MAINTENANCE

5.1 Cleaning

- Disconnect the mouse from your device before cleaning.
- Use a soft, dry, lint-free cloth to wipe the surface of the mouse.
- For stubborn dirt, lightly dampen the cloth with water or a mild electronic cleaner. Avoid excessive moisture.
- Do not use harsh chemicals, abrasive cleaners, or solvents.

5.2 Battery Care

- Charge the mouse regularly to maintain battery health.
- Avoid fully discharging the battery frequently.
- Do not expose the mouse to extreme temperatures, as this can affect battery life.

5.3 Storage

- When not in use for extended periods, store the mouse in a cool, dry place.

- Ensure the mouse is turned off to conserve battery life.
- The USB receiver can be stored in its magnetic slot on the bottom of the mouse to prevent loss.

6. TROUBLESHOOTING

6.1 Connection Issues

- **Mouse not connecting via 2.4GHz USB receiver:**
 - Ensure the USB receiver is securely plugged into a working USB port.
 - Verify the switch on the bottom of the mouse is set to the 2.4G position.
 - Try plugging the receiver into a different USB port.
- **Mouse not connecting via Bluetooth:**
 - Ensure the switch on the bottom of the mouse is set to the Bluetooth position.
 - Check that Bluetooth is enabled on your device.
 - Remove any previous pairings of the mouse from your device's Bluetooth settings and attempt to pair again.
 - Ensure the mouse is sufficiently charged.

6.2 DPI Light Behavior

- **DPI light not changing color:** Press the DPI button to cycle through settings. If it still doesn't change, ensure the mouse is powered on and charged.
- **DPI light is off:** Long-press the DPI button for 2 seconds to toggle the light on/off.

6.3 Charging Problems

- **Mouse not charging:**
 - Ensure the Type-C charging cable is securely connected to both the mouse and a power source.
 - Try using a different USB port or power adapter.
 - Check if the charging cable is damaged.
- **Scroll wheel light flashing red:** This indicates a low battery. Connect the mouse to a power source for charging.

6.4 Cursor Movement

- **Erratic or no cursor movement:**
 - Ensure the mouse is properly connected (2.4GHz or Bluetooth).
 - Check the battery level and charge if necessary.
 - Clean the optical sensor on the bottom of the mouse.
 - Ensure the mouse is used on a suitable surface (not highly reflective or transparent).

7. SPECIFICATIONS

Feature	Specification
Product Dimensions	4.45 x 2.24 x 0.98 inches (113 x 57 x 25 mm)
Item Weight	2.4 ounces (68 grams)
Connectivity Technology	Bluetooth 5.1, 2.4GHz Wireless (USB)

Movement Detection Technology	Optical
DPI Levels	800 / 1200 / 1600 / 2400
Battery Type	1 Lithium Ion battery (included)
Charging Port	Type-C
Special Features	One-click DPI adjustment, One-click access to desktop, One-click muting, Three shortcut keys



Image 9: Dimensions of the FMOUSE M113 mouse

8. WARRANTY AND SUPPORT

8.1 Warranty Information





FMOUSE products are designed and manufactured to the highest quality standards. For specific warranty details, please refer to the warranty card included in your product packaging or visit the official FMOUSE website. Keep your purchase receipt as proof of purchase for warranty claims.

8.2 Customer Support

If you encounter any issues or have questions regarding your FMOUSE M113 mouse that are not covered in this manual, please contact FMOUSE customer support through the following channels:

- **Official Website:** [Visit the FMOUSE Store on Amazon](#)
- **Email:** Refer to product packaging or official website for contact email.

Related Documents - M113

	FMOUSE M501 Wireless Gaming Mouse Instruction Manual Comprehensive instruction manual for the FMOUSE M501 wireless gaming mouse, detailing its tri-mode connectivity (2.4GHz, Bluetooth 3.0, Bluetooth 5.0), ergonomic design, adjustable DPI, and rechargeable features.
	FMOUSE M333 Wireless Mouse Instruction Manual User guide for the FMOUSE M333 wireless mouse, featuring RGB lighting, silent clicks, transparent design, and dual connectivity (Bluetooth 5.1, 2.4GHz USB/Type-C). Learn about DPI settings, product features, and usage.
	M113 Instruction Manual Instruction manual for the M113 device, providing setup and usage guidelines.
	700 MOUSE User Manual and Product Information Comprehensive user manual for the 700 MOUSE wireless mouse, covering features, operation instructions for 2.4G and Bluetooth modes, installation, troubleshooting, battery and laser safety warnings, warranty information, and FCC compliance.