



Keychron Q2 Pro Bluetooth Mechanical Keyboard User Guide

[Home](#) » [Keychron](#) » Keychron Q2 Pro Bluetooth Mechanical Keyboard User Guide 




Q2 Pro Bluetooth Mechanical Keyboard User Guide

Contents

- [1 Fully Assembled Version](#)
- [2 Barebone Version](#)
- [3 Quick Start Guide](#)
- [4 Warranty](#)
- [5 Factory Reset](#)
- [6 Q2 PRO BLUETOOTH MECHANICAL KEYBOARD SPECIFICATIONS](#)
- [7 Documents / Resources](#)
- [8 Related Posts](#)

Fully Assembled Version

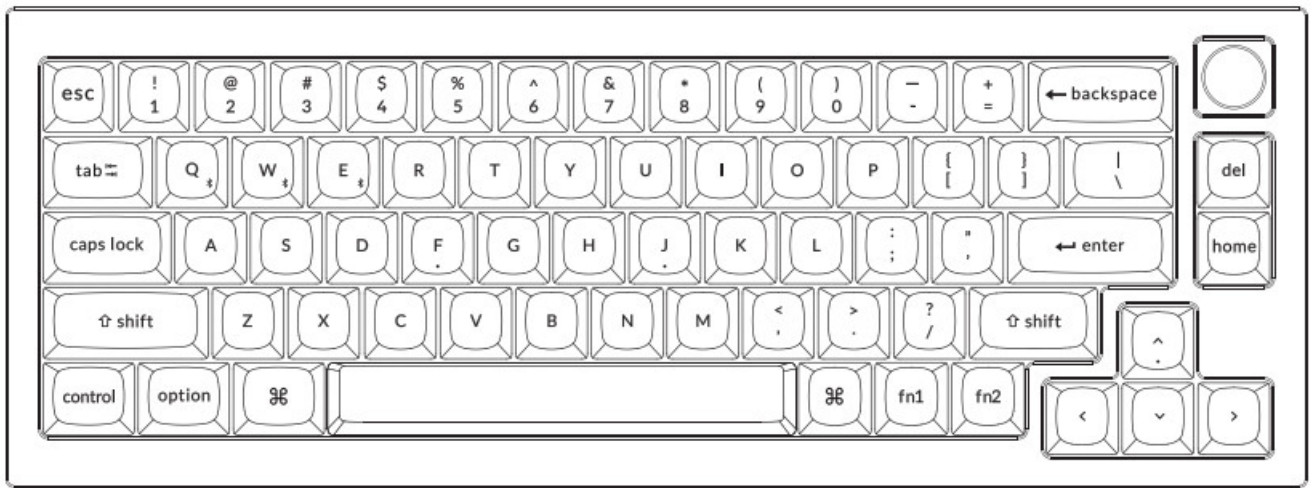

Keyboard

1x Fully Assembled Keyboard

Including

1x Aluminum Case

1x PCB

1x PC Plate

1x Sound Absorbing Foam

1x Case Foam

14x Gaskets (10 Installed and 4 in the Box)

4 Sets x Stabilizers


1 Set x Keycaps (PBT Double-shot)

1 Set x Switches

Cable

1x Type-C to Type-C Cable

1x Type-A to Type-C Adapter



Tools


1x Switch Puller

1x Keycap Puller

1x Screwdriver

1x Hex Key

Barebone Version

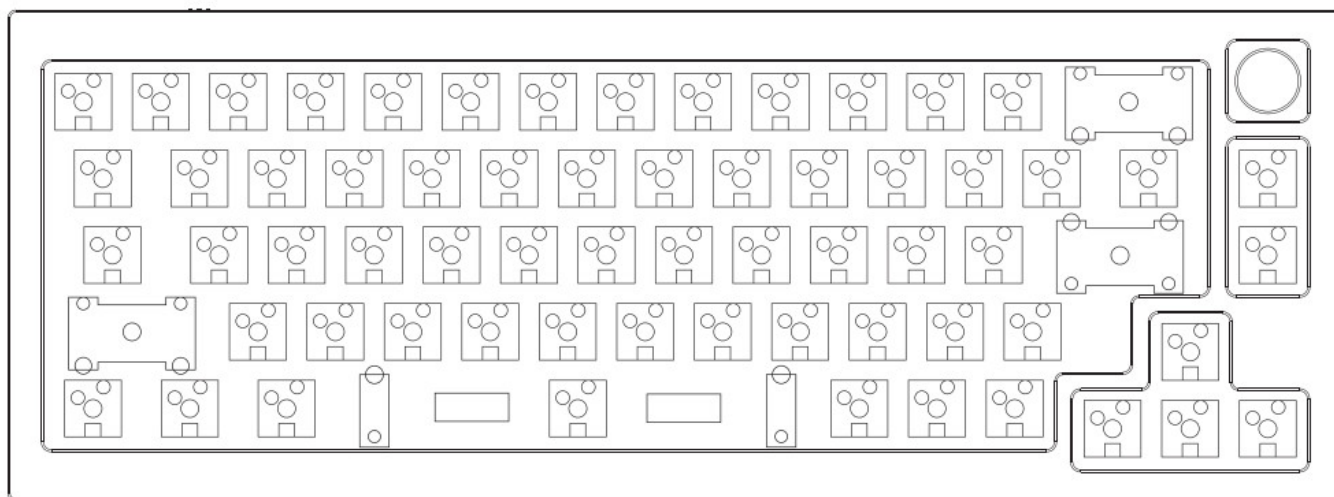

Keyboard Kit

1x Keyboard Kit (Without Keycaps & Switches)

Including

1x Aluminum Case

1x PCB

1x PC Plate

1x Sound Absorbing Foam

1x Case Foam


14x Gaskets (10 Installed and 4 in the Box)

4 Sets x Stabilizers

Cable

1x Type-C to Type-C Cable

1x Type-A to Type-C Adapter

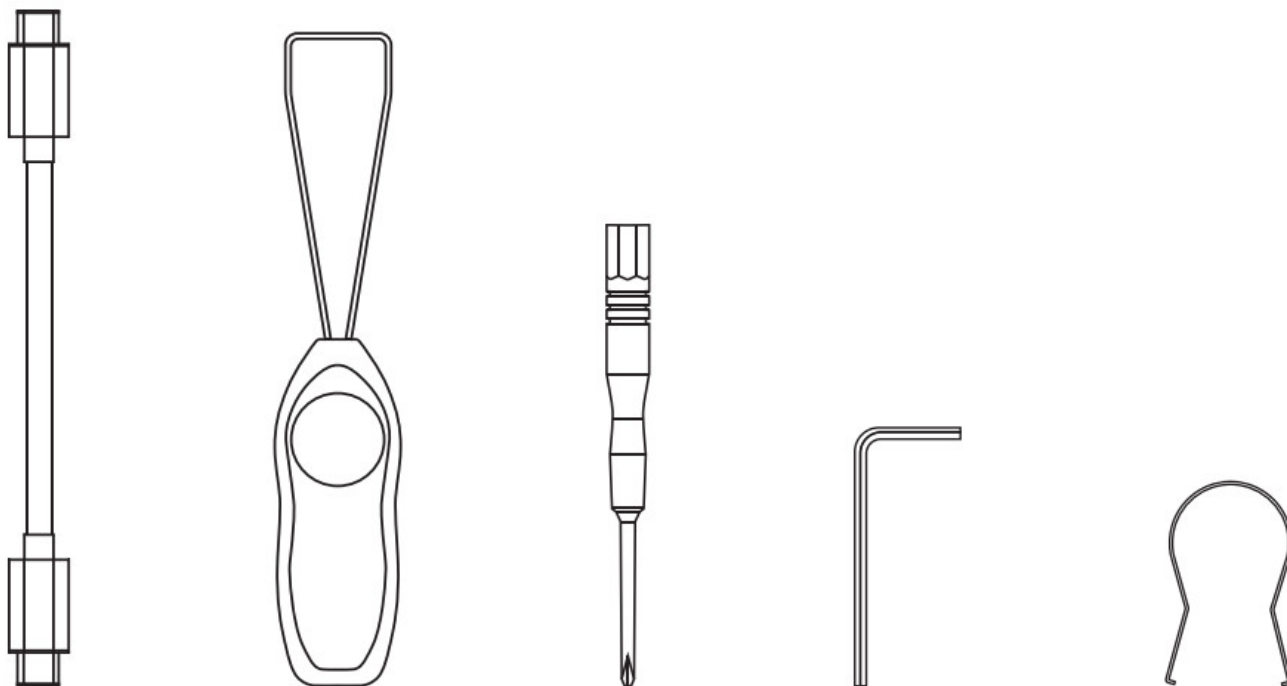

Tools

1x Switch Puller

1x Keycap Puller


1x Screwdriver

1x Hex Key

Quick Start Guide

If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.


Mac / Windows

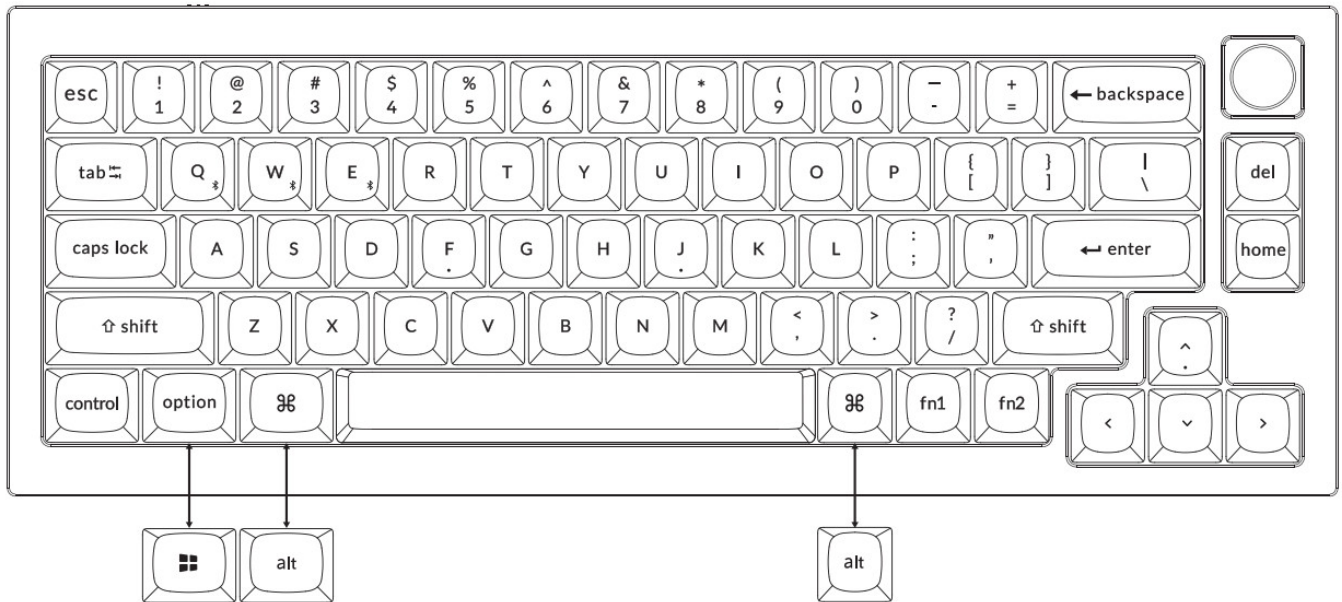

Connect Bluetooth



Switch toggle to Bluetooth




Press fn1 + Q (for 4 seconds) and pair with device named Keychron Q2 Pro.



Connect Cable



Switch toggle to Cable



The VIA Key Remapping Software

Please visit caniusevia.com to download the latest VIA software to remap the keys.

If the VIA software cannot recognize your keyboard, please reach out to our support to get the instruction. (VIA only works when the keyboard is connected by wire to the computer.)



The Layers

There are five layers of key settings on the keyboard.


The layer 0 is for the Mac system.

The layer 1 is for the Windows system.


The layer 2 is for the Mac Multimedia keys.

The layer 3 is for the Windows Multimedia keys.


The layer 4 is for the Function keys.

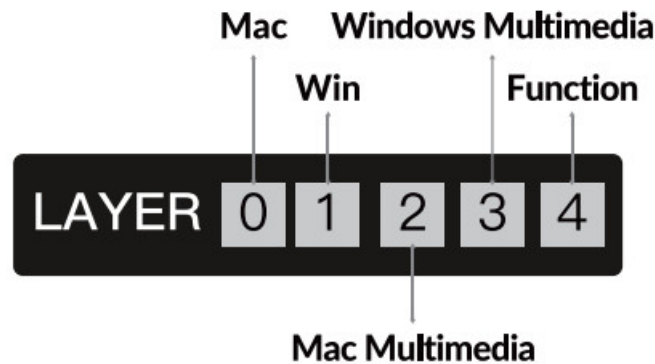

If your system toggle is switched to Mac, then the layer 0 will be activated.

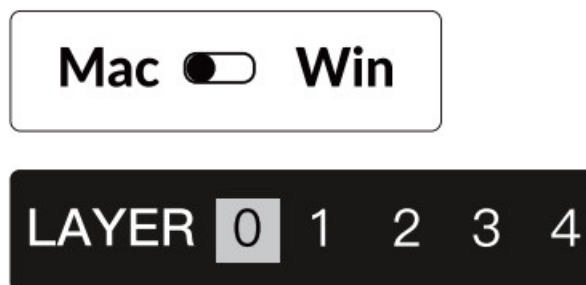


If your system toggle is switched to Windows, then the layer 1 will be activated.

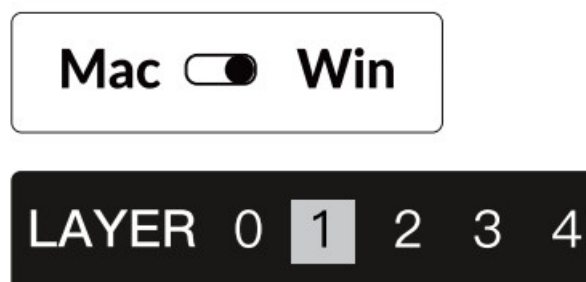

Multimedia Key and Function Key

Multimedia keys



Function keys

F1 / F2 / F3 / F4 / F5 / F6 / F7 / F8 / F9 / F10 / F11 / F12

In order to get Multimedia Key, you need to press fn1 and



Key.


In order to get Function Key, you need to press fn2 and



Key.


The Backlight

Press fn1 + A to change the lighting effect

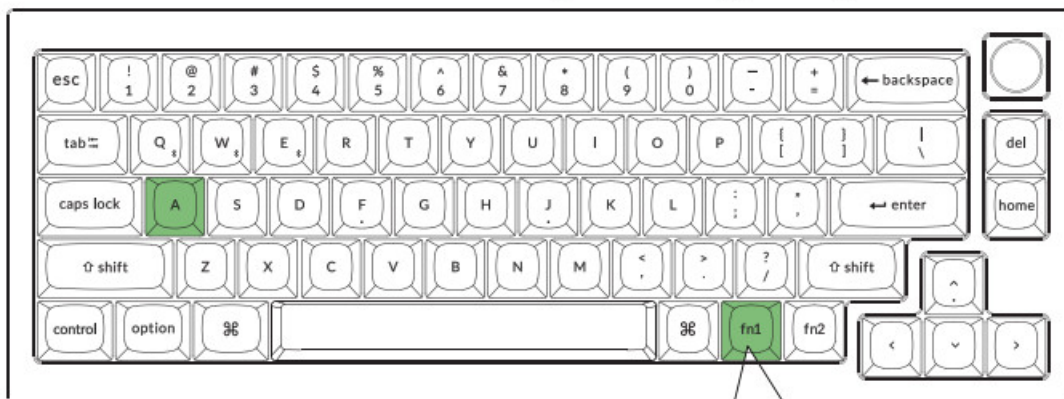

fn1 + A


Press fn1 + caps lock to turn the backlight on/off

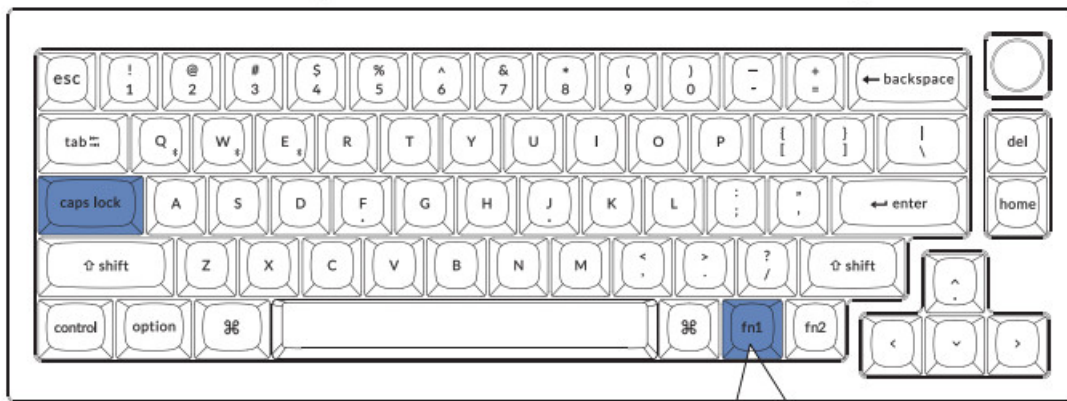

fn1 + caps lock


Adjust The Backlight Brightness

Press fn1 + S to increase the backlight brightness

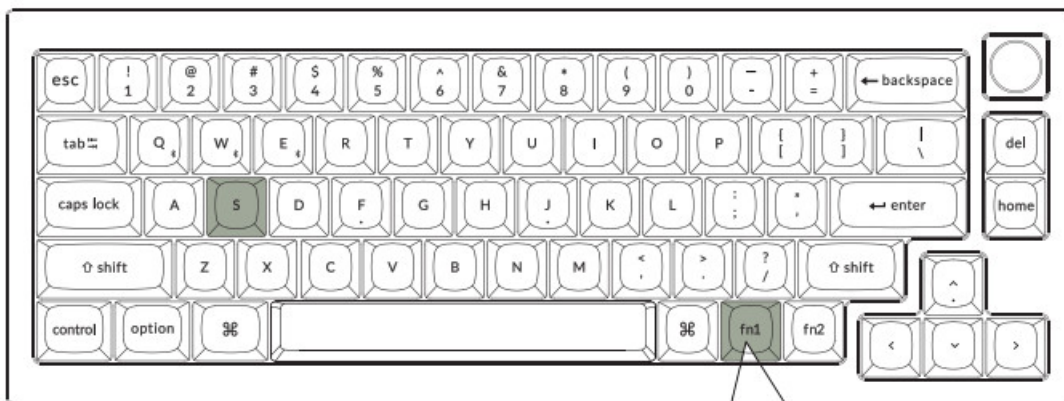

fn1 + S

Press fn1 + X to decrease the backlight brightness

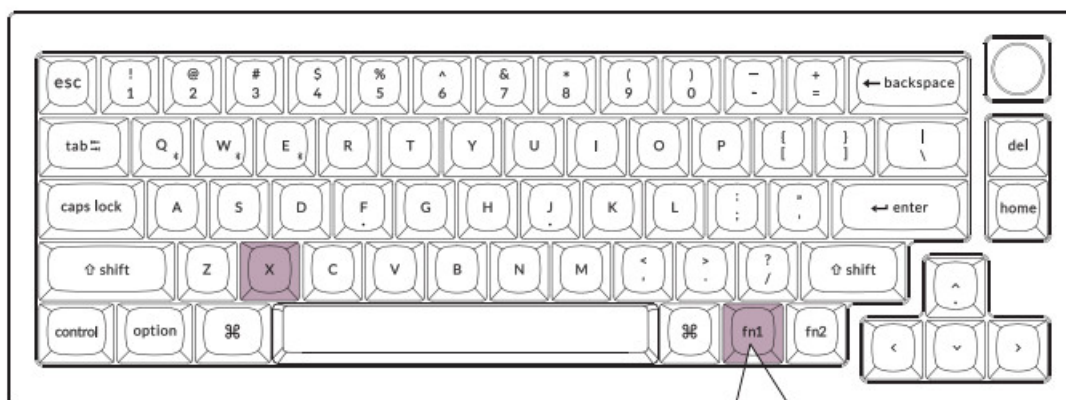

fn1 + X

The keyboard is highly customizable and easy to be rebuilt.

If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.




Watch The Building Tutorial On Our Website

If you are building the keyboard for the first time, we highly recommend you watch the building tutorial video on our website first, then start building the keyboard yourself.



Factory Reset

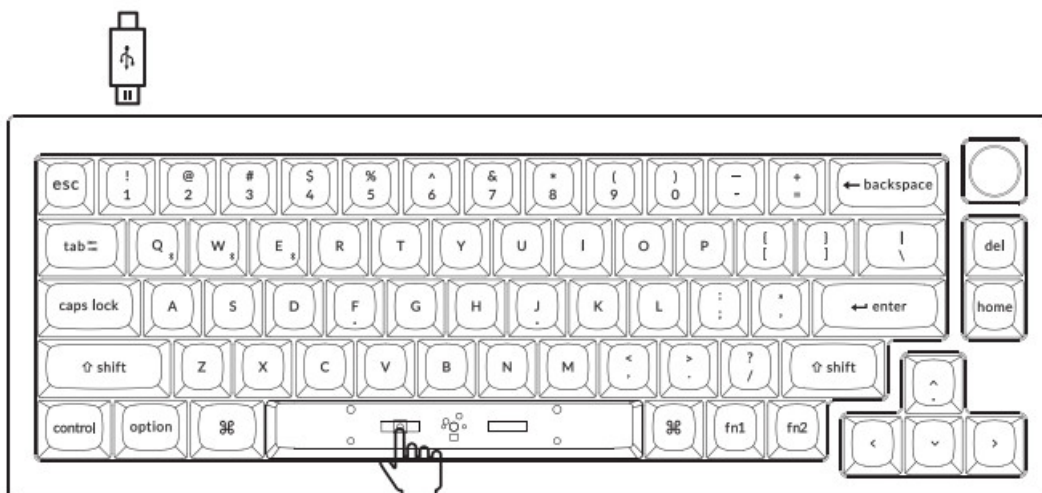

Troubleshooting? Don't know what's going on with the keyboard?


1. Plug in the power cable and switch the keyboard to Cable mode.
2. Factory reset the keyboard by pressing fn2 + J + Z (for 4 seconds).
3. Download the right firmware and QMK Toolbox from our website.

4. Switch the keyboard to OFF mode and remove the space bar keycap to find the reset button on the PCB.
 5. Hold the reset key first, then switch the keyboard to Cable mode.
 6. Release the reset key, and the keyboard will now enter DFU mode.
 7. Flash the firmware with the QMK Toolbox.
 8. Factory reset the keyboard again by pressing fn2 + J + Z (for 4 seconds).
- * Step by step guide can be found on our website.

Q2 PRO BLUETOOTH MECHANICAL KEYBOARD SPECIFICATIONS

Number of keys: 66
Switch type: Mechanical
Battery: 4000mAh
Bluetooth working time (RGB): Up to 100 hours (Lowest brightness)
Charging time: Around 5 hours
Charging port: USB Type-C
Mode: Bluetooth / Wired
Bluetooth operating distance: Within 10 meters (open space)
Name of Bluetooth device: Keychron Q2 Pro

Documents / Resources

	Keychron Q2 Pro Bluetooth Mechanical Keyboard [pdf] User Guide Q2 Pro, Q2 Pro Bluetooth Mechanical Keyboard, Bluetooth Mechanical Keyboard, Mechanical Keyboard, Keyboard
---	--