



LINQ LQ48011 Pro USB-C 10Gbps Multiport Hub with Dual 4K HDMI User Manual

[Home](#) » [LINQ](#) » LINQ LQ48011 Pro USB-C 10Gbps Multiport Hub with Dual 4K HDMI User Manual 



7 in 2 D2 Pro Edition
Model #: LQ48011

Product Manual

Contents








- [1 LQ48011 Pro USB-C 10Gbps Multiport Hub with Dual 4K HDMI](#)
- [2 Product Specifications](#)
- [3 Overview](#)
- [4 Troubleshooting](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

LQ48011 Pro USB-C 10Gbps Multiport Hub with Dual 4K HDMI

Thank you for purchasing our 7 in **2 D2 Pro Edition**.

Please read this user manual carefully and keep it in a safe place for future reference. If you need any assistance, please contact our support team with your product model number and order number of the relevant sales channel.

Product Specifications


      	<ul style="list-style-type: none"> • M1 Compatible MST for All Apple M1 and Intel Mac Laptop • 2x HDMI Output Port HDMI 1 – Up to 4k UHD (3840 x 2160@ 60Hz), HDMI 2 – Up to 4K UHD (3840×2160@30Hz) MST • USB-A Super Speed+ Super Speed USB-A 3.2 Gen 2, Max data transfer speed 10Gbps Power Supply up to 4.5W Max. • USB-C Super Speed+ Super Speed USB-C 3.2 Gen 2, Max data transfer speed 10Gbps Power Supply up to 4.5W Max Only for Data Transfer) • USB-C PD Port Charging up to 100W of Power Delivery 3.0 (Only for laptop charging) • RJ45 Gigabit Ethernet Max Ethernet Speeds up to 1000Mbps • Dual USB-C Connector Compatible with Thunderbolt 3 and 4, Dedicated design for use with a dual USB TypeC port Macbook.
--	--


System Requirements:

MacOSX v10.0 or above-operating systems

Plug and play: Yes

Overview

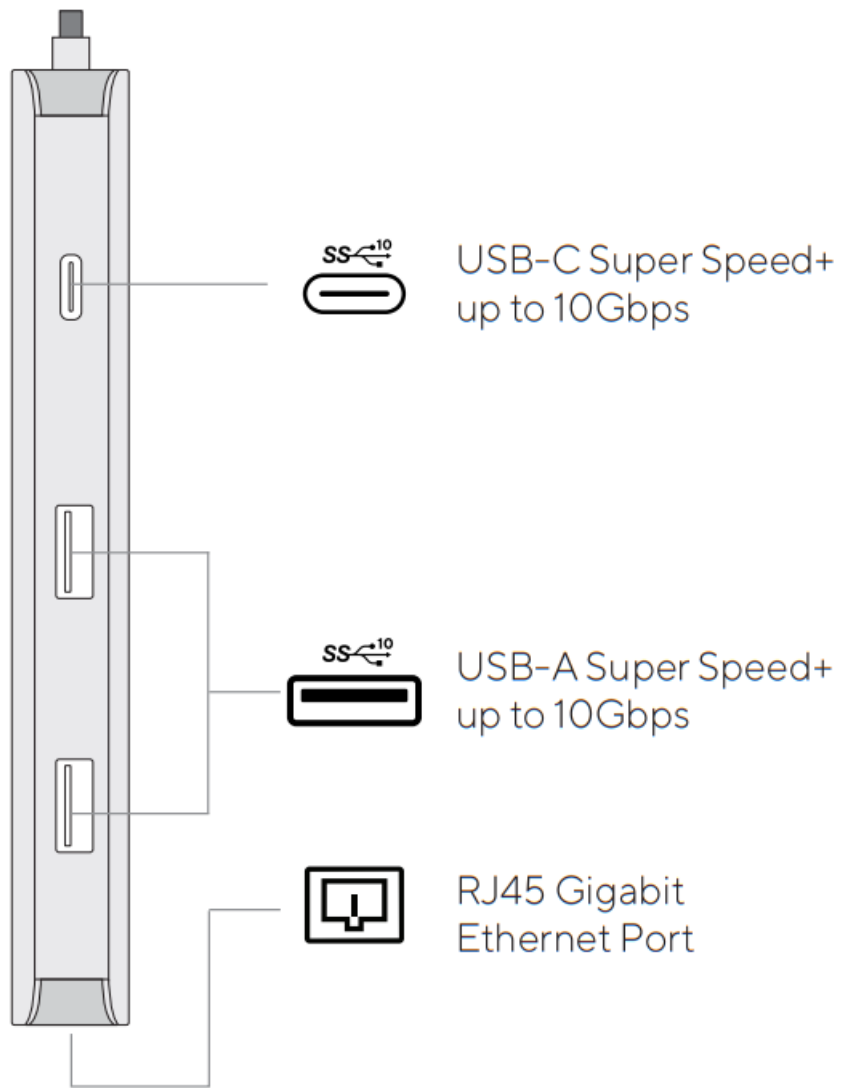

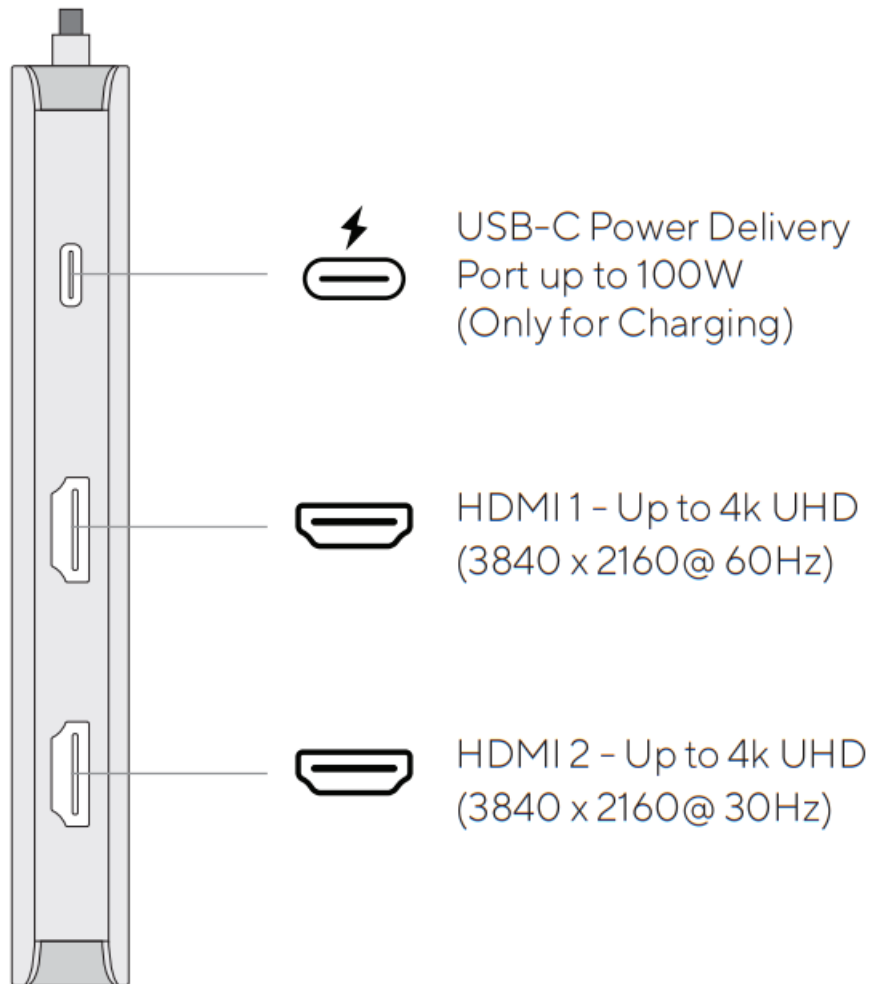

Notes

1. To enable HDMI2, download the latest driver on our website: <http://linqbyelements.dkd2instantview.html>
2. Only one hub is included, power adapters, SD/TF memory cards, cables or other accessories are not included.
3. The up to 100W charging speed can only be achieved when used with a 100W rated USB-C PD cable in a combination of a 100W Type-C PD Power Adapter.
4. The USB Data Ports of this product support Max. 5V 900mAh total charging output.
5. For more stable connection when using high-power devices, connect a PD Power Adaptor to the USB-C female PD port.
6. The USB-C female PD port of this product is only for charging USB-C laptops whose USB-C Port supports USB Power Delivery (PD). The PD USB-C female port of this product does not support data transfer.
7. The USB-C female data port of this product is only for data transfer.
8. The USB-C female data port of this product does not support charging.
9. A 4K capable display and a 4K capable HDMI cable are required to achieve 3840 x 2160 resolution.
10. Make sure to connect your primary display in HDMI 1.
11. HDMI 1.4 cables only support 30Hz, and HDMI 2.0 cables support 4K up to 60Hz.
12. 4K 60Hz Compatibility requires a DP 1.4 compatible Type-C port on your device. How to Use Plug the Dual USB-C male the connector of the Hub into the USB-C port on your Macbook and run the Installer that can be downloaded by scanning the QR code or by visiting our website.



<https://www.mayflash.com>

13. USB-C Power Delivery: Charge your laptop by plugging the USB-C Charger to the Multiport Hub USB-C Female Power Delivery (PD) port.
14. HDMI Output: Connect to your UHDTV or projector with an HDMI 2.0 cable via the HDMI output port and watch videos from your USB-C laptop on your TV or other HDMI-enabled devices.
15. HDMI 1 Output: Capable of 4K Display @ 60Hz HDMI 2 Output: Capable of 4K Display @ 30Hz
16. USB-C Super Speed+: Connect your smartphone, tablet, hard drive or other USB-C peripherals via the USB-C Port and transfer data between your computer and connected device.
17. USB-A Super Speed+: Connect your smartphone, tablet, mouse, keyboard, hard drive, or other USB peripherals via the USB-A ports and transfer data between your computer and connected device.

Troubleshooting

if you experience any issues or have any questions regarding the hub, please visit the support and FAQ page on our website for the most up-to-date information.

LINQ | Support



<https://linqbyelements.dksupport.html>

Compatibilities Details regarding the compatibility of devices can be found on our website or consult your device's manual.

visit:

www.LINQbyELEMENTS.dk

Documents / Resources

	LINQ LQ48011 Pro USB-C 10Gbps Multiport Hub with Dual 4K HDMI [pdf] User Manual LQ48011, Pro USB-C 10Gbps Multiport Hub with Dual 4K HDMI, 10Gbps Multiport Hub, Multip ort Hub, LQ48011, Hub
	LINQ LQ48011 Pro USB-C 10Gbps Multiport Hub [pdf] User Manual LQ48011, Pro USB-C 10Gbps Multiport Hub, LQ48011 Pro, USB-C 10Gbps Multiport Hub, LQ4 8011 Pro USB-C 10Gbps Multiport Hub, 10Gbps Multiport Hub, Multiport Hub, Hub

References

- [LINQ byELEMENTS | Extend connectivity without compromises! – LINQbyELEMENTS](#)
- [LINQ byELEMENTS | Extend connectivity without compromises! – LINQbyELEMENTS](#)
- [LINQ byELEMENTS | Extend connectivity without compromises! – LINQbyELEMENTS](#)

-  [Downloads – LINQbyELEMENTS](#)

Manuals+.