

SEALEY HT104R Head Torch 5w Cob and 3w Led Bulb with Auto Sensor



SEALEY HT104R Head Torch 5w Cob and 3w Led Bulb with Auto Sensor User Guide

[Home](#) » [SEALEY](#) » SEALEY HT104R Head Torch 5w Cob and 3w Led Bulb with Auto Sensor User Guide 

Contents

- [1 SEALEY HT104R Head Torch 5w Cob and 3w Led Bulb with Auto Sensor](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 SAFETY](#)
- [5 SPECIFICATION](#)
- [6 OPERATION](#)
- [7 MAINTENANCE](#)
- [8 ENVIRONMENT PROTECTION](#)
- [9 BATTERY REMOVAL](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)



SEALEY HT104R Head Torch 5w Cob and 3w Led Bulb with Auto Sensor



Product Information

Specifications

- **Model:** HT104R
- **LED Bulb Type:** 5W COB & 3W LED
- **Features:** Auto-sensor, USB Type-C charging
- **Charging Time:** Approximately 2.5 hours

Product Usage Instructions

Safety

- Read and follow all safety instructions provided in the manual.
- Use the product correctly and with care for its intended purpose.
- Keep the product away from water and moisture.
- Do not disassemble the product yourself.

Operation

1. Remove the USB cover on the rear of the lamp unit to access the charging point.
2. Plug the USB cable into a power source for charging.
3. Charging is complete when the Power LED changes from red to green.
4. Adjust the headband for a comfortable fit.
5. The unit has five operating modes: On/Off, Strip Light 100%, Strip Light 30%, Torch 100%, Torch 30%.
6. Press the On/Off Mode Selector to switch between different modes.
7. To activate the Motion Sensor, press the Motion Sensor Selector.
8. Cover the Motion Sensors on the side of the lamp unit to activate the sensor.

Maintenance

- Keep the torch clean by wiping it with a damp cloth.
- Store the torch in a dry and childproof area.
- Recycle unwanted materials and dispose of the product in an environmentally friendly manner.

Frequently Asked Questions (FAQ)

- **Q: How do I know when the torch is fully charged?**

A: The Power LED will change from red to green when the torch is fully charged.

- **Q: How do I switch between different operating modes?**

A: Use the On/Off Mode Selector to cycle through the different modes – Strip Light 100%, Strip Light 30%, Torch 100%, Torch 30%.

- **Q: How do I activate the Motion Sensor feature?**

A: Press the Motion Sensor Selector to turn on the Motion Sensor. Covering the Motion Sensors on the side of the lamp unit will activate the sensor.

- **Q: How should I store the torch when not in use?**

A: Store the torch in a dry and childproof area to maintain its longevity.

Thank you for purchasing a Sealey product. Manufactured to a high standard, this product will, if used according to these instructions, and properly maintained, give you years of trouble free performance.

IMPORTANT: PLEASE READ THESE INSTRUCTIONS CAREFULLY. NOTE THE SAFE OPERATIONAL REQUIREMENTS, WARNINGS & CAUTIONS. USE THE PRODUCT CORRECTLY AND WITH CARE FOR THE PURPOSE FOR WHICH IT IS INTENDED. FAILURE TO DO SO MAY CAUSE DAMAGE AND/OR PERSONAL INJURY AND WILL INVALIDATE THE WARRANTY. KEEP THESE INSTRUCTIONS SAFE FOR FUTURE USE.

SAFETY

GENERAL SAFETY

- Ensure the lamp is fully charged before initial use.
- DO NOT turn the torch on when it is being charged.
- DO NOT shine directly into your, other person's or animal's eyes.
- DO NOT allow children to use the torch.
- DO NOT handle or move the torch whilst it is being charged.
- DO NOT use the torch if you suspect that the battery or the torch casing is damaged.
- DO NOT leave battery in a discharged state, recharge battery immediately.
- Before storage, fully recharge the battery, and subsequently recharge the battery at least once every six months of non-use.1.2.

ELECTRICAL SAFETY

- Use only the USB charging lead supplied to charge the battery.
- **WARNING!** It is the user's responsibility to read, understand and comply with the following electrical instructions: You must ensure the risk of electric shock is minimised by the installation of appropriate safety devices. An RCCB (Residual Current Circuit Breaker) should be incorporated into the main distribution board.

We also recommend that an RCD (Residual Current Device) is used with all electrical products, particularly portable equipment which is plugged into an electrical supply not protected by an RCCB. You must also read and understand the following instructions concerning electrical safety.

- The Electricity At Work Act 1989 requires all portable electrical appliances, if used on business premises, to be tested by a qualified electrician, using a Portable Appliance Tester (PAT), at least once a year.
- The Health & Safety at Work Act 1974 makes owners of electrical appliances responsible for the safe condition of the appliance and the safety of the appliance operator. If in any doubt about electrical safety, contact a qualified electrician.
- You must ensure that you:
 - Inspect the cable and connector for wear and damage to ensure items are safe before connecting to the power supply.
 - DO NOT use if worn or damaged.

BATTERY SAFETY

- **WARNING!** To reduce the risk of burns or fire:
 - DO NOT Attempt to open, disassemble, modify or service the battery pack.
 - DO NOT Crush, puncture, short external contacts or dispose of in fire or water.
 - DO NOT Expose to temperatures above 60°C (140°).
 - Replace only with the battery pack designated for this product.
 - Recycle or dispose of used battery as stipulated by local regulations.
 - If the electrolyte in the cells gets on your skin thoroughly wash with soap and water. If it gets in your eyes, rinse thoroughly with cool water and seek immediate medical attention.

INTRODUCTION

5W COB LED Striplight along front of adjustable headband with 3W LED bulb on one side. Automatic sensor turns on and off when you move your hand in front. Supplied with USB Type-C charging lead.


SPECIFICATION

- **Model No:**.....HT104R
- **Battery:**.....3.7V 1.2Ah Lithium-Polymer
- **Charging Time:**2.5hr
- **LED Type:**.....5W COB + 3W LED Bulb
- **Lumen Output:**.....COB; 350lm
..... 3W LED Bulb; 120lm
- **Operating Time:**..... 2hr @ 100%
..... 6hr @ 30%.

OPERATION

1. Remove USB cover on the rear of the lamp unit to reveal the USB charging point and insert the power cable.
2. Plug the cable into an appropriate power source. Charging will take approximately 2.5 hr.
3. When fully charged the Power LED will change from red to green.

4. When charged, remove USB cable and replace the USB cover.
5. Adjust the head band size for a comfortable and secure fit using the adjusters
6. The unit has five operating modes. These are On/Off, Strip Light 100%, Strip Light 30%, Torch 100%, Torch 30%.
7. To switch the unit on, press On/Off Mode Selector and the Strip Light will illuminate at 100%. Press the Selector again, and the Strip Light will reduce to 30%. Press the Selector again and the Torch will illuminate at 100%. Press the Selector again and the Torch will reduce to 30%. A further press on the Selector will turn the unit off.
8. To turn the Motion Sensor on, press the Motion Sensor Selector. The Power LED will illuminate to half red and half green.
9. The Sensor is activated by covering the Motion Sensors on the side of the lamp unit. Press the Motion Sensor Selector to turn the function off.

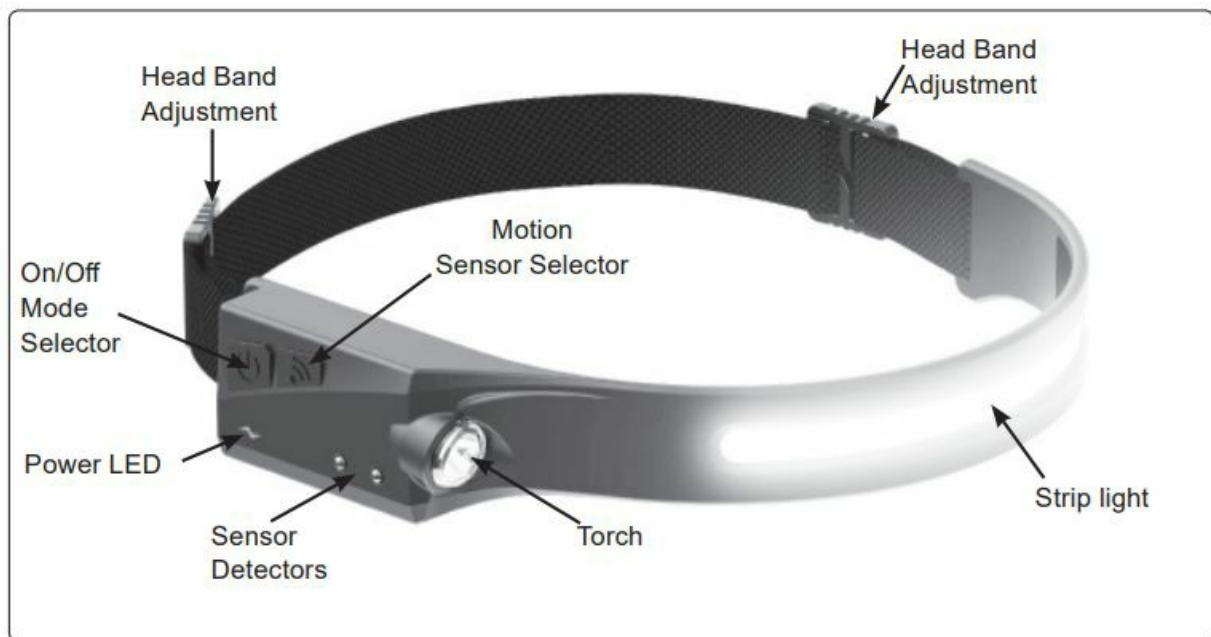

MAINTENANCE

1. Keep the torch clean by wiping with a damp cloth.
2. Store torch in a dry childproof area.

ENVIRONMENT PROTECTION

Recycle unwanted materials instead of disposing of them as waste. All tools, accessories and packaging should be sorted, taken to a recycling centre and disposed of in a manner which is compatible with the environment. When the product becomes completely unserviceable and requires disposal, drain any fluids (if applicable) into approved containers and dispose of the product and fluids according to local regulations.



WEEE REGULATIONS

Dispose of this product at the end of its working life in compliance with the EU Directive on Waste Electrical and Electronic Equipment (WEEE). When the product is no longer required, it must be disposed of in an environmentally protective way. Contact your local solid waste authority for recycling information.

BATTERY REMOVAL

Under the Waste Batteries and Accumulators Regulations 2009, Jack Sealey Ltd are required to inform potential purchasers of products containing batteries (as defined within these regulations), that they are registered with Valpak's registered compliance scheme. Jack Sealey Ltd's Batteries Producer Registration Number (BPRN) is BPRN00705.

Note: It is our policy to continually improve products and as such we reserve the right to alter data, specifications and component parts without prior notice.

Important: No Liability is accepted for incorrect use of this product.


Warranty: Guarantee is 12 months from purchase date, proof of which is required for any claim.

Sealey Group, Kempson Way, Suffolk Business Park, Bury St Edmunds, Suffolk. IP32 7AR 01284 757500

sales@sealey.co.uk

www.sealey.co.uk

Documents / Resources

	<p>SEALEY HT104R Head Torch 5w Cob and 3w Led Bulb with Auto Sensor [pdf] User Guide HT104R Head Torch 5w Cob and 3w Led Bulb with Auto Sensor, HT104R, Head Torch 5w Cob and 3w Led Bulb with Auto Sensor, 3w Led Bulb with Auto Sensor, Bulb with Auto Sensor, Auto Sensor</p>
---	--

References

- [Sealey - Leading Professional Tool & Workshop Equipment Supplier](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.