

# Electric Designer (ED, EDU) Series Counter Equipment

---

## Parts List

**Hotplates**

**Griddles**

**Broilers**

**Fryers**

**Food Warmers**



## Rating Plate Location

---

The Rating plate is readily visible by opening the enameled door located below the control panel.




## Serial# - Year/Month Information

---

From June 2004 to Present:

The Serial Number is **13 Digits** long and is stamped on the Rating Plate.  
See "Rating Plate Location".

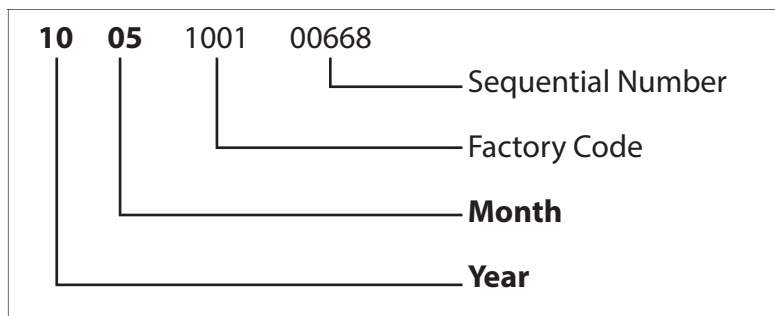




**Electric Designer (ED)  
Counter Equipment Series**  
Hotplates / Fryers / Griddles / Broilers

***Table of Contents***

|                                                                         |    |
|-------------------------------------------------------------------------|----|
| Rating Plate Location, Serial# Information .....                        | 2  |
| Hot Plate — ED-15H .....                                                | 4  |
| Hot Plates — ED-15HSE / ED-15THSE / EDU-15HSE .....                     | 8  |
| Griddles — ED-15G / ED-24G / ED-36G / EDU-15G / EDU-24G / EDU-36G ..... | 12 |
| Broilers — ED-15B / ED-30B / ED-42B / EDU-15B / EDU-30B / EDU-42B ..... | 16 |
| Food Warmer — ED-15W / EDU-15W / ED-15WP .....                          | 20 |
| Super Fryers — ED-15SF / ED-30SFT / EDU-18SF / EDU-36SFT .....          | 24 |
| Fryers — ED-15F / ED-30FT / EDU-18F / EDU-36FT .....                    | 32 |
| Related Bulletins .....                                                 | 39 |
| Revision History .....                                                  | 39 |

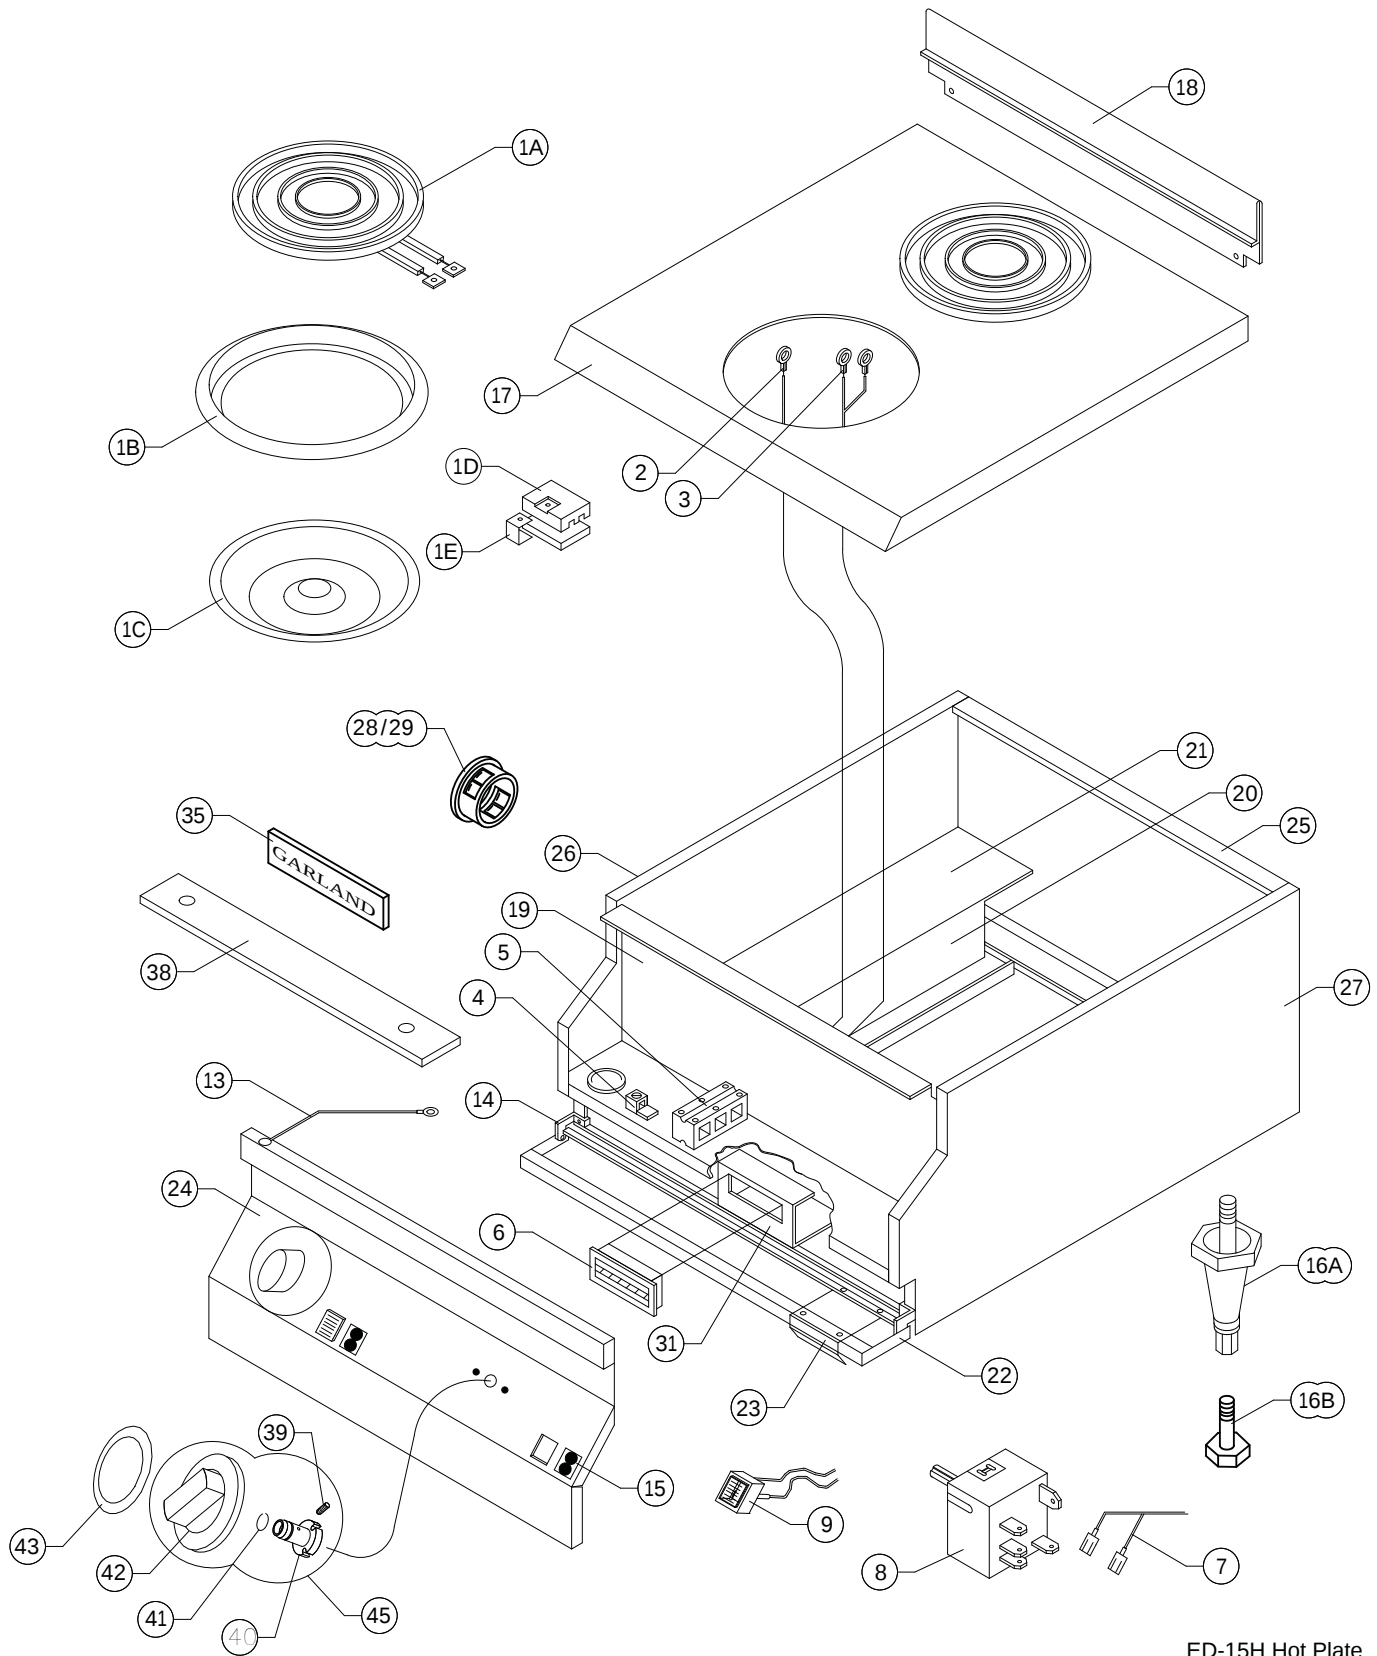

ED-15H Hot Plate

# GARLAND PARTS IDENTIFICATION

## Hot Plate ED-15H

| ITEM | PART #                     | DESCRIPTION                                                                                                                                       | MODEL<br>ED-15H | DATE      |           | CRITICAL |
|------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-----------|-----------|----------|
|      |                            |                                                                                                                                                   | QTY             | FROM      | UP TO     |          |
| 1A   | <a href="#">2195000</a>    | <b>8" Surface Element 208V (2.1Kw)</b>                                                                                                            | 2               |           |           | C        |
|      | <a href="#">2195001</a>    | <b>8" Surface Element 240V (2.1Kw)</b>                                                                                                            | 2               |           |           | C        |
|      | <a href="#">2195002</a>    | <b>8" Surface Element 220V (2.1Kw)</b>                                                                                                            | 2               |           |           | C        |
| 1B   | <a href="#">2602399</a>    | 8" Ring Assembly                                                                                                                                  | 2               |           |           |          |
| 1C   | <a href="#">2195300</a>    | 8" Pan Reflector                                                                                                                                  | 2               |           |           |          |
| 1D   | <a href="#">2195800</a>    | Split Terminal Block (Small)                                                                                                                      | 2               |           |           |          |
| 1E   | <a href="#">2627700</a>    | Terminal Block Clip                                                                                                                               | 2               |           |           |          |
| 2    | <a href="#">2147703</a>    | Ground Wire                                                                                                                                       | 2               |           |           |          |
| 3    | <a href="#">2148100</a>    | Element Wire Harness                                                                                                                              | 1               |           |           |          |
| 4    | <a href="#">G01500-1</a>   | Ground Terminal 55 Amp                                                                                                                            | 1               |           |           |          |
| 5    | <a href="#">2147300</a>    | <b>Terminal Block 3 Circuit</b>                                                                                                                   | 1               |           |           | C        |
|      | <a href="#">2147302</a>    | <b>Terminal Block 3 Circuit Export</b>                                                                                                            | 1               |           |           | C        |
| 6    | <a href="#">078174-1</a>   | <b>Magnetic Door Catch</b>                                                                                                                        | 1               |           |           | C        |
| 7    | <a href="#">2148000</a>    | Primary Wires                                                                                                                                     | 1               |           |           |          |
| 8    | <a href="#">CKG03185-2</a> | <b>Infinite Switch-240 Volt</b>                                                                                                                   | 2               |           |           | C        |
| 9    | <a href="#">2138504</a>    | <b>Green Indicator Light (Obsolete, use <a href="#">CK4533015</a>)</b>                                                                            | 2               |           | 30-Apr-16 | C        |
|      | <a href="#">CK4533015</a>  | <b>Service Kit for Indicator Light 250V Green</b><br>Notes: Kit includes green rectangular 250V light 4533015 and green rectangular lens 4533016. | 2               | 1-May-16  |           | C        |
|      |                            |                                                                                                                                                   |                 |           |           |          |
| 13   | <a href="#">2147700</a>    | Ground Wire                                                                                                                                       | 1               |           |           |          |
| 14   | <a href="#">2149400</a>    | Door Hinge Right Hand                                                                                                                             | 1               |           |           |          |
|      | <a href="#">2149401</a>    | Door Hinge Left Hand                                                                                                                              | 1               |           |           |          |
| 15   | <a href="#">2150000</a>    | Element Identification Plate                                                                                                                      | 2               |           |           |          |
| 16A  | <a href="#">078109-2</a>   | 4" Adjustable Metal Leg                                                                                                                           | 4               |           |           |          |
| 16B  | <a href="#">F157</a>       | Leveling Bolt-3/8-16x1 1/16"                                                                                                                      | 4               |           |           |          |
| 16C* | <a href="#">G01503-10</a>  | Leg Weld Nut                                                                                                                                      | 4               |           |           |          |
| 17   | <a href="#">2132699</a>    | Main Top Assembly                                                                                                                                 | 1               |           |           |          |
| 18   | <a href="#">2168000</a>    | Back Splash to 12/07/95                                                                                                                           | 1               |           | 07-Dec-95 |          |
|      | <a href="#">2385500</a>    | Back Splash from 12/07/95                                                                                                                         | 1               | 07-Dec-95 |           |          |
| 19   | <a href="#">2132798</a>    | Control Shield Assembly                                                                                                                           | 1               |           | 23-Feb-93 |          |
|      | <a href="#">2132799</a>    | Control Shield Assembly                                                                                                                           | 1               | 23-Feb-93 | 04-Apr-94 |          |
|      | <a href="#">2351899</a>    | Control Shield Assembly                                                                                                                           | 1               | 04-Apr-94 |           |          |
| 20   | <a href="#">2149600</a>    | Wireway                                                                                                                                           | 1               |           |           |          |
| 21   | <a href="#">2156500</a>    | Body Shield                                                                                                                                       | 1               |           |           |          |
| 22   | <a href="#">2149299</a>    | Door Assembly 15"                                                                                                                                 | 1               |           |           |          |
| 23   | <a href="#">2149300</a>    | Door Pull                                                                                                                                         | 1               |           |           |          |
| 24   | <a href="#">2137700</a>    | Control Panel                                                                                                                                     | 1               |           | 4-Apr-94  |          |
|      | <a href="#">2349600</a>    | Control Panel                                                                                                                                     | 1               | 4-Apr-94  |           |          |
| 25   | <a href="#">2180900</a>    | Body Back & Bottom                                                                                                                                | 1               |           |           |          |
|      | <a href="#">2180901</a>    | Body Back & Bottom S/S                                                                                                                            | 1               |           |           |          |
| 26   | <a href="#">2180699</a>    | Body Side Assembly LH - Black (Code 9402CG0180)                                                                                                   | 1               |           | 21-Feb-94 |          |
|      | <a href="#">2180698</a>    | Body Side Assembly LH S/S (Code 9402CG0180)                                                                                                       | 1               |           | 21-Feb-94 |          |
|      | <a href="#">2349498</a>    | Body Side Assembly LH (Code 9402CG0181)                                                                                                           | 1               | 21-Feb-94 |           |          |
|      | <a href="#">2349496</a>    | Body Side Assembly LH (Code 9402CG0181)                                                                                                           | 1               | 21-Feb-94 |           |          |
| 27   | <a href="#">2180599</a>    | Side Assembly RH - Black (Code 9402CG0180)                                                                                                        | 1               |           | 21-Feb-94 |          |
|      | <a href="#">2180598</a>    | Side - Right Assembly S/S (Code 9402CG0180)                                                                                                       | 1               |           | 21-Feb-94 |          |
|      | <a href="#">2349499</a>    | Body Side Assembly RH (Code 9402CG0181)                                                                                                           | 1               | 21-Feb-94 |           |          |
|      | <a href="#">2349497</a>    | Body Side Assembly RH (Code 9402CG0181)                                                                                                           | 1               | 21-Feb-94 |           |          |
| 28   | <a href="#">G01487-8</a>   | Heyco Bushing 11/16 ID                                                                                                                            | 1               |           |           |          |
| 29   | <a href="#">G01487-5</a>   | Heyco Bushing 1-5/16 ID                                                                                                                           | 1               |           |           |          |
| 30*  | <a href="#">2174500</a>    | Joiner Tab                                                                                                                                        | 2               |           |           |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

## GARLAND PARTS IDENTIFICATION


### Hot Plate ED-15H

| ITEM | PART #                  | DESCRIPTION                               | MODEL<br>ED-15H | DATE     |          | CRITICAL |
|------|-------------------------|-------------------------------------------|-----------------|----------|----------|----------|
|      |                         |                                           | QTY             | FROM     | UP TO    |          |
| 31   | 2139600                 | Magnet Mounting Bracket to 5/07/91        | 1               |          | 7-May-91 |          |
|      | <a href="#">2183500</a> | Magnet Bracket from 5/07/91               | 1               | 7-May-91 |          |          |
| 32*  | <a href="#">2149800</a> | Access Panel                              | 1               |          |          |          |
| 33*  | <a href="#">2171400</a> | Terminal Block Mounting Bracket           | 1               |          |          |          |
| 34*  | <a href="#">2139700</a> | Control Panel Clip                        | 2               |          |          |          |
| 35   | <a href="#">4529725</a> | Garland Nameplate 4 7/8"                  | 1               |          |          |          |
| 36*  | 2146100                 | Wiring Diagram (Domestic) Ed-15H 208V     |                 |          |          |          |
| 37*  | 2146200                 | Wiring Diagram (Export) Ed-15H 220V       |                 |          |          |          |
| 38   | <a href="#">2285999</a> | Leg Channel Assembly 15"                  | 2               |          |          |          |
| 39   | <a href="#">F561</a>    | 10-32 - 3/16 Socket Head Screw            | 2               |          |          |          |
| 40   | <a href="#">3043207</a> | Knob Hub                                  | 2               |          |          |          |
| 41   | <a href="#">3043300</a> | Retaining Spring                          | 2               |          |          |          |
| 42   | <a href="#">3043100</a> | Dial                                      | 2               |          |          |          |
| 43   | <a href="#">2139000</a> | Dial Insert                               | 2               |          |          |          |
| 45   | <a href="#">4512224</a> | Dial Kit – Includes Items: 39, 40, 41, 42 |                 |          |          |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

Blank Page

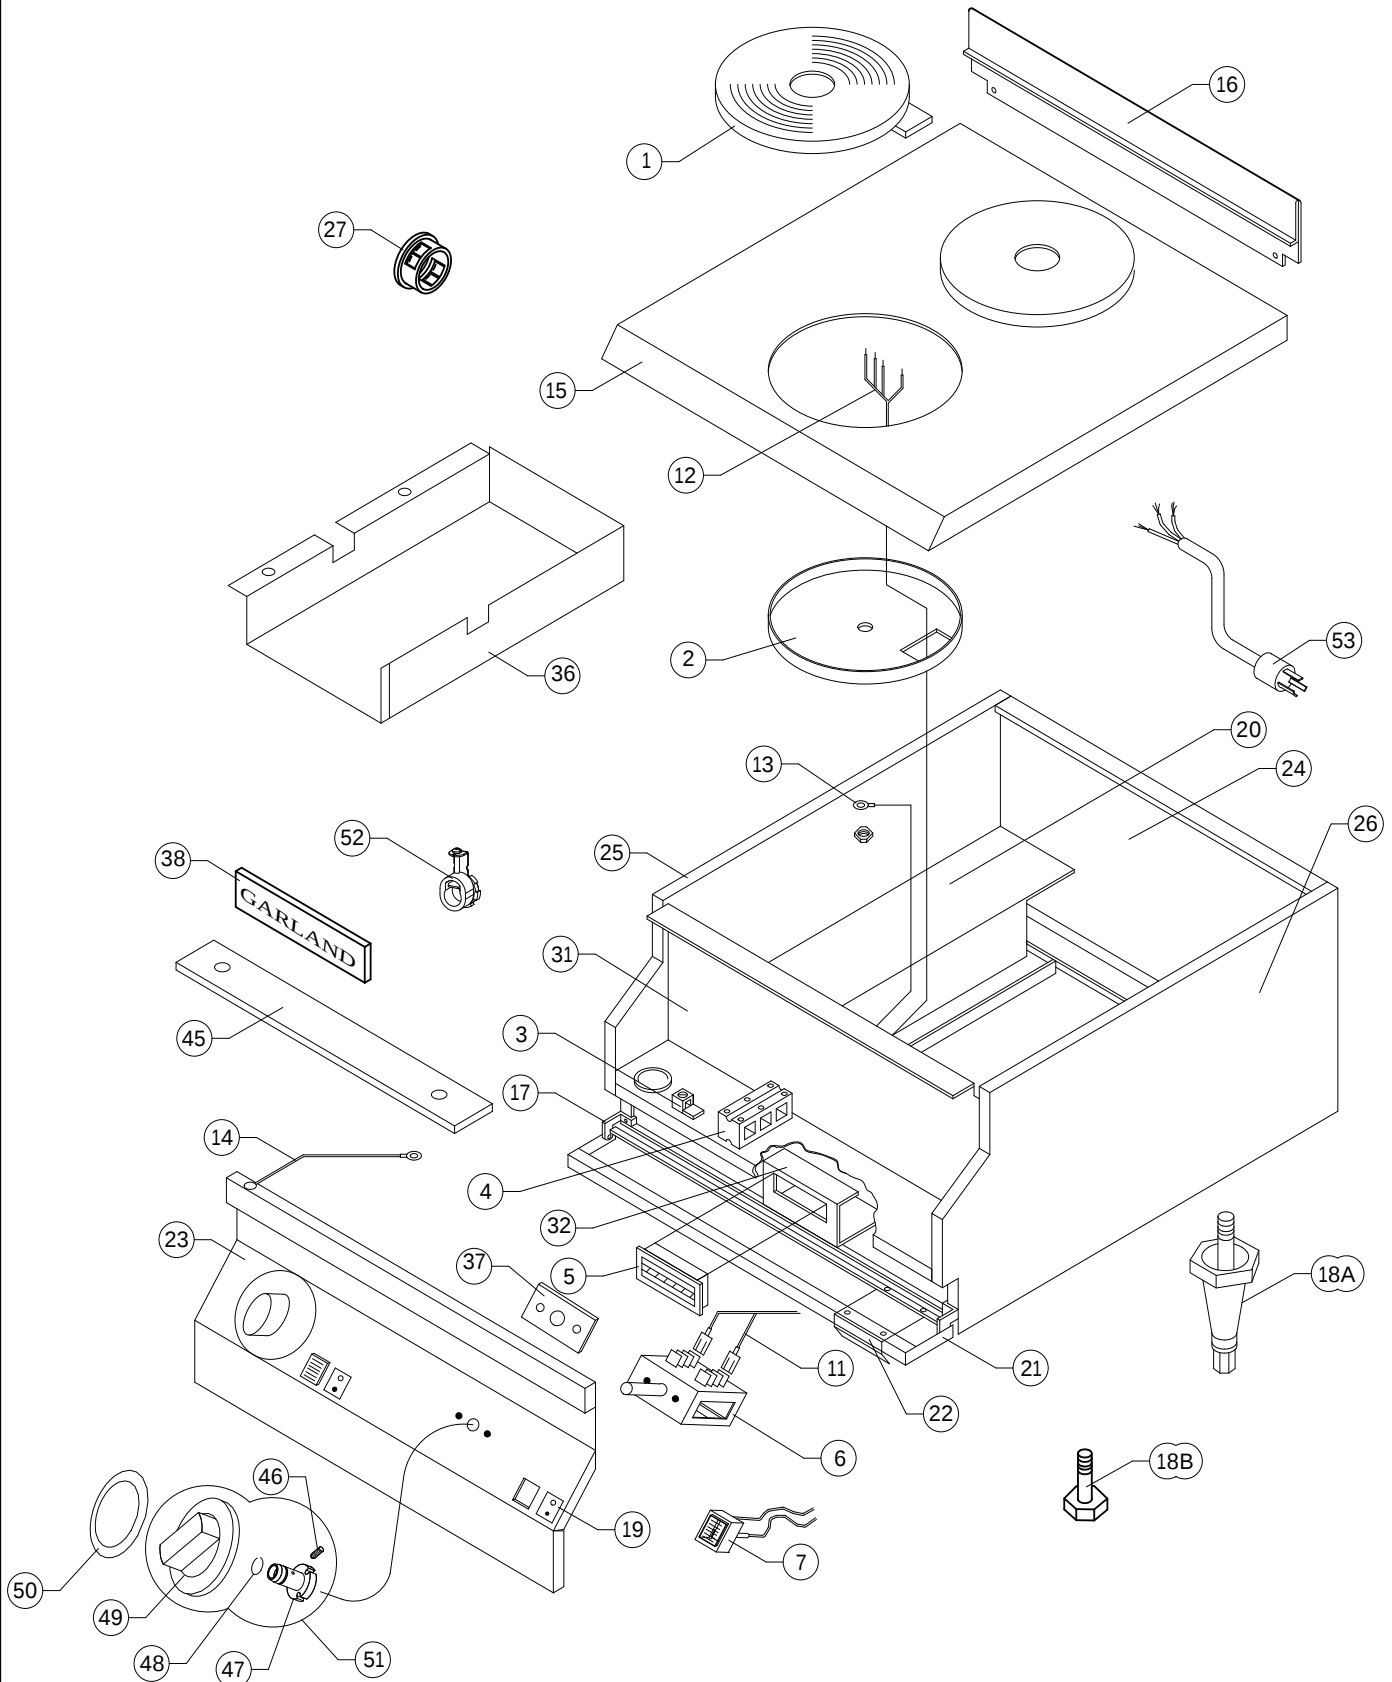

ED-15HSE Hot Plate

**GARLAND PARTS IDENTIFICATION**  
**Hot Plates ED-15HSE, ED15THSE & EDU-15HSE**

| ITEM | PART#     | DESCRIPTION                                                                                                                                | MODEL    |           |           | DATE      |           | CRITICAL |
|------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------|----------|-----------|-----------|-----------|-----------|----------|
|      |           |                                                                                                                                            | QUANTITY |           |           | FROM      | UP TO     |          |
|      |           |                                                                                                                                            | ED-15HSE | ED-15THSE | EDU-15HSE |           |           |          |
| 1    | 2590200   | Sealed Element 208<br>Tim Hortons Only                                                                                                     |          | 2         |           |           |           | C        |
|      | 2590201   | Sealed Element 220<br>Tim Hortons Only                                                                                                     |          | 2         |           |           |           | C        |
|      | 2590202   | Sealed Element 240<br>Tim Hortons Only                                                                                                     |          | 2         |           |           |           | C        |
|      | 2147100   | Sealed Element 208                                                                                                                         | 2        |           | 2         |           |           | C        |
|      | 2147101   | Sealed Element 220                                                                                                                         | 2        |           | 2         |           |           | C        |
|      | 2147102   | Sealed Element 240                                                                                                                         | 2        |           | 2         |           |           | C        |
| 2    | 2147200   | Screening Sheet 237mm                                                                                                                      | 2        |           | 2         |           |           |          |
|      | 2147201   | Screening Street 180mm<br>Tim Hortons Only                                                                                                 |          | 2         |           |           |           |          |
| 3    | G01500-1  | Ground Terminal 55 Amp                                                                                                                     | 1        | 1         | 1         |           |           |          |
| 4    | 2147300   | Terminal Block 3 Circuit                                                                                                                   | 1        | 1         |           |           |           | C        |
|      | 2147302   | Terminal Block 3 Circuit Export                                                                                                            | 1        |           | 1         |           |           | C        |
| 5    | 078174-1  | Magnetic Door Catch                                                                                                                        | 1        | 1         | 1         |           |           | C        |
| 6    | 4523166   | 6-Heat Switch, cCSAus                                                                                                                      | 2        | 2         | 2         |           |           |          |
|      | 4523167   | 6 Heat Switch, CE                                                                                                                          | 2        | 2         | 2         |           |           | C        |
| 7    | 2138504   | Green Indicator Light (Obsolete, use CK4533015)                                                                                            | 2        | 2         | 2         |           | 30-Apr-16 | C        |
|      | CK4533015 | Service Kit for Indicator Light 250V Green<br>Notes: Kit includes green rectangular 250V light 4533015 and green rectangular lens 4533016. | 2        | 2         | 2         | 1-May-16  |           | C        |
| 11   | 2147800   | Primary Wires Harness                                                                                                                      | 1        | 1         | 1         |           |           |          |
| 12   | 2147900   | Element Wires Harness                                                                                                                      | 2        | 2         | 2         |           |           |          |
| 13   | 2147702   | Ground Wire Rear                                                                                                                           | 2        | 2         | 2         |           |           |          |
| 14   | 2147700   | Ground Wire                                                                                                                                | 1        | 1         | 1         |           |           |          |
| 15   | 2147399   | Main Top Assembly                                                                                                                          | 1        |           | 1         |           |           |          |
|      | 2137298   | Main Top Assembly<br>Tom Hortons Only                                                                                                      |          | 1         |           |           |           |          |
| 16   | 2168000   | Back Splash                                                                                                                                | 1        |           | 1         |           | 07-Dec-95 |          |
|      | 2385500   | Back Splash                                                                                                                                | 1        | 1         | 1         | 07-Dec-95 |           |          |
| 17   | 2149400   | Door Hinge Right Hand                                                                                                                      | 1        | 1         | 1         |           |           |          |
|      | 2139401   | Door Hinge Left Hand                                                                                                                       | 1        | 1         | 1         |           |           |          |
| 18A  | 078109-2  | 4" Adjustable Metal Leg                                                                                                                    | 4        | 4         | 4         |           |           |          |
| 18B  | F-157     | Leveling Bolt-3/8-16x1-1/16"                                                                                                               | 4        | 4         | 4         |           |           |          |
| 18C* | G01503-10 | Leg Weld Nut                                                                                                                               | 4        | 4         | 4         |           |           |          |
| 19   | 2150000   | Element Identification Plate                                                                                                               | 2        | 2         | 2         |           |           |          |
| 20   | 2149600   | Wireway                                                                                                                                    | 1        | 1         | 1         |           |           |          |
| 21   | 2149299   | Door Assembly 15"                                                                                                                          | 1        | 1         | 1         |           |           |          |
| 22   | 2149300   | Door Pull                                                                                                                                  | 1        | 1         | 1         |           | 06-Mar-00 |          |
|      | 2149301   | Door Handle                                                                                                                                | 1        | 1         | 1         | 06-Mar-00 |           |          |
| 23   | 2137700   | Control Panel                                                                                                                              | 1        |           |           |           | 04-Apr-94 |          |
|      | 2349600   | Control Panel                                                                                                                              | 1        | 1         |           | 04-Apr-94 |           |          |
|      | 9349602   | Control Panel                                                                                                                              |          |           | 1         |           |           |          |
| 24   | 2180900   | Body Back & Bottom                                                                                                                         | 1        | 1         | 1         |           |           |          |
|      | 2180901   | Body Back & Bottom S/S                                                                                                                     | 1        | 1         | 1         |           |           |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

## GARLAND PARTS IDENTIFICATION


### Hot Plates ED-15HSE, ED15THSE & EDU-15HSE

| ITEM | PART#                    | DESCRIPTION                                                                                                                     | MODEL    |           |           | DATE      |           | CRITICAL |
|------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------|----------|-----------|-----------|-----------|-----------|----------|
|      |                          |                                                                                                                                 | QUANTITY |           |           | FROM      | UP TO     |          |
|      |                          |                                                                                                                                 | ED-15HSE | ED-15THSE | EDU-15HSE |           |           |          |
| 25   | <a href="#">2180699</a>  | Body Side Assembly LH Black (Code 9402CG0180)                                                                                   | 1        | 1         |           |           | 21-Feb-94 |          |
|      | <a href="#">2180698</a>  | Body Side Assembly LH S/S (Code 9402CG0180)                                                                                     | 1        | 1         |           |           | 21-Feb-94 |          |
|      | <a href="#">2349498</a>  | Body Side Assembly LH (Code 9402CG0181)                                                                                         | 1        | 1         | 1         | 21-Feb-94 |           |          |
|      | <a href="#">2349496</a>  | Body Side Assembly LH (Code 9402CG0181)                                                                                         | 1        | 1         | 1         | 21-Feb-94 |           |          |
| 26   | 2180599                  | Side Assembly RH (Code 9402CG0180)                                                                                              | 1        | 1         |           |           | 21-Feb-94 |          |
|      | 2180598                  | Side - Right Assembly S/S (Code 9402CG0180)                                                                                     | 1        | 1         |           |           | 21-Feb-94 |          |
|      | 2394999                  | Body Side Assembly RH (Code 9402CG0181)                                                                                         | 1        | 1         | 1         | 21-Feb-94 |           |          |
|      | <a href="#">2349497</a>  | Body Side Assembly RH (Code 9402CG0181)                                                                                         | 1        | 1         | 1         | 21-Feb-94 |           |          |
| 27   | <a href="#">G01487-8</a> | Heyco Bushing 11/16 ID                                                                                                          | 1        | 1         | 1         |           |           |          |
| 28*  | <a href="#">G01487-5</a> | Heyco Bushing 1-5/16 ID                                                                                                         | 1        | 1         | 1         |           |           |          |
| 29*  | 2193700                  | Control Panel Clip                                                                                                              | 2        | 2         | 2         |           |           |          |
| 30*  | <a href="#">2174500</a>  | Joiner Tab                                                                                                                      | 2        | 2         | 2         |           |           |          |
| 31   | 2132799                  | Control Shield Assembly                                                                                                         | 1        | 1         |           | 23-Feb-93 | 04-Apr-94 |          |
|      | <a href="#">2351899</a>  | Control Shield Assembly                                                                                                         | 1        | 1         | 1         | 04-Apr-94 |           |          |
| 32   | 2139600                  | Magnet Mounting Bracket                                                                                                         | 1        | 1         | 1         |           | 07-May-94 |          |
|      | <a href="#">2183500</a>  | Magnetic Bracket                                                                                                                | 1        | 1         | 1         | 07-May-94 |           |          |
| 33*  | <a href="#">2149800</a>  | Access Panel                                                                                                                    | 1        | 1         | 1         |           |           |          |
| 34*  | 2150200                  | Bottom Baffle                                                                                                                   | 1        | 1         | 1         |           |           |          |
| 35*  | <a href="#">2171400</a>  | Terminal Black Mounting Bracket                                                                                                 | 1        | 1         | 1         |           |           |          |
| 36   | 2608700                  | Wireway                                                                                                                         |          |           | 1         |           |           |          |
| 37   | <a href="#">2618500</a>  | Switch Seal                                                                                                                     |          |           | 2         |           |           |          |
| 38   | <a href="#">4529725</a>  | Garland Nameplate 4 7/8"                                                                                                        | 1        | 1         | 1         |           |           |          |
| 39*  | 26186600                 | Side Seal                                                                                                                       |          |           | 2         |           |           |          |
| 40*  | 2618700                  | Front Seal                                                                                                                      |          |           | 1         |           |           |          |
| 41*  | 2146401                  | Wiring Diagram, EDU-15HSE-CE V                                                                                                  |          |           | 1         |           |           |          |
| 42*  | 2146300                  | Wiring Diagram ED-15HSE 208DOM                                                                                                  | 1        |           |           |           |           |          |
| 43*  | 2146400                  | Wiring Diagram ED-15HSE 220EXP                                                                                                  | 1        |           |           |           |           |          |
| 44*  | 2146301                  | Wiring Diagram<br>Tim Hortons Only                                                                                              |          | 1         |           |           |           |          |
| 45   | <a href="#">2285999</a>  | Leg Channel Assembly 15"                                                                                                        | 2        | 2         | 2         |           |           |          |
| 46   | <a href="#">F561</a>     | 10-32 – 3/16 Socket Head Screw                                                                                                  | 2        | 2         | 2         |           |           |          |
| 47   | <a href="#">3043207</a>  | Knob Hub                                                                                                                        | 2        | 2         | 2         |           |           |          |
| 48   | <a href="#">3043300</a>  | Retaining Spring                                                                                                                | 2        | 2         | 2         |           |           |          |
| 49   | <a href="#">3043100</a>  | Dial                                                                                                                            | 2        | 2         | 2         |           |           |          |
| 50   | <a href="#">2139000</a>  | Dial Insert                                                                                                                     | 2        | 2         | 2         |           |           |          |
| 51   | <a href="#">4512224</a>  | Dial Kit – Inculdes Items: 46, 47, 48, 49                                                                                       |          |           |           |           |           |          |
| 52   | <a href="#">G01497-1</a> | Bx Connector Straight 3/8"                                                                                                      |          | 1         |           |           |           |          |
| 53   | <a href="#">4523405</a>  | Power Cord W/L6-30 Plug – Only Available On<br>ED-15THSE - 208 Volts 1/Phase Models<br>Manufactured From Serial # 0803100100956 |          | 1         |           | 17-Mar-08 |           |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

Blank Page

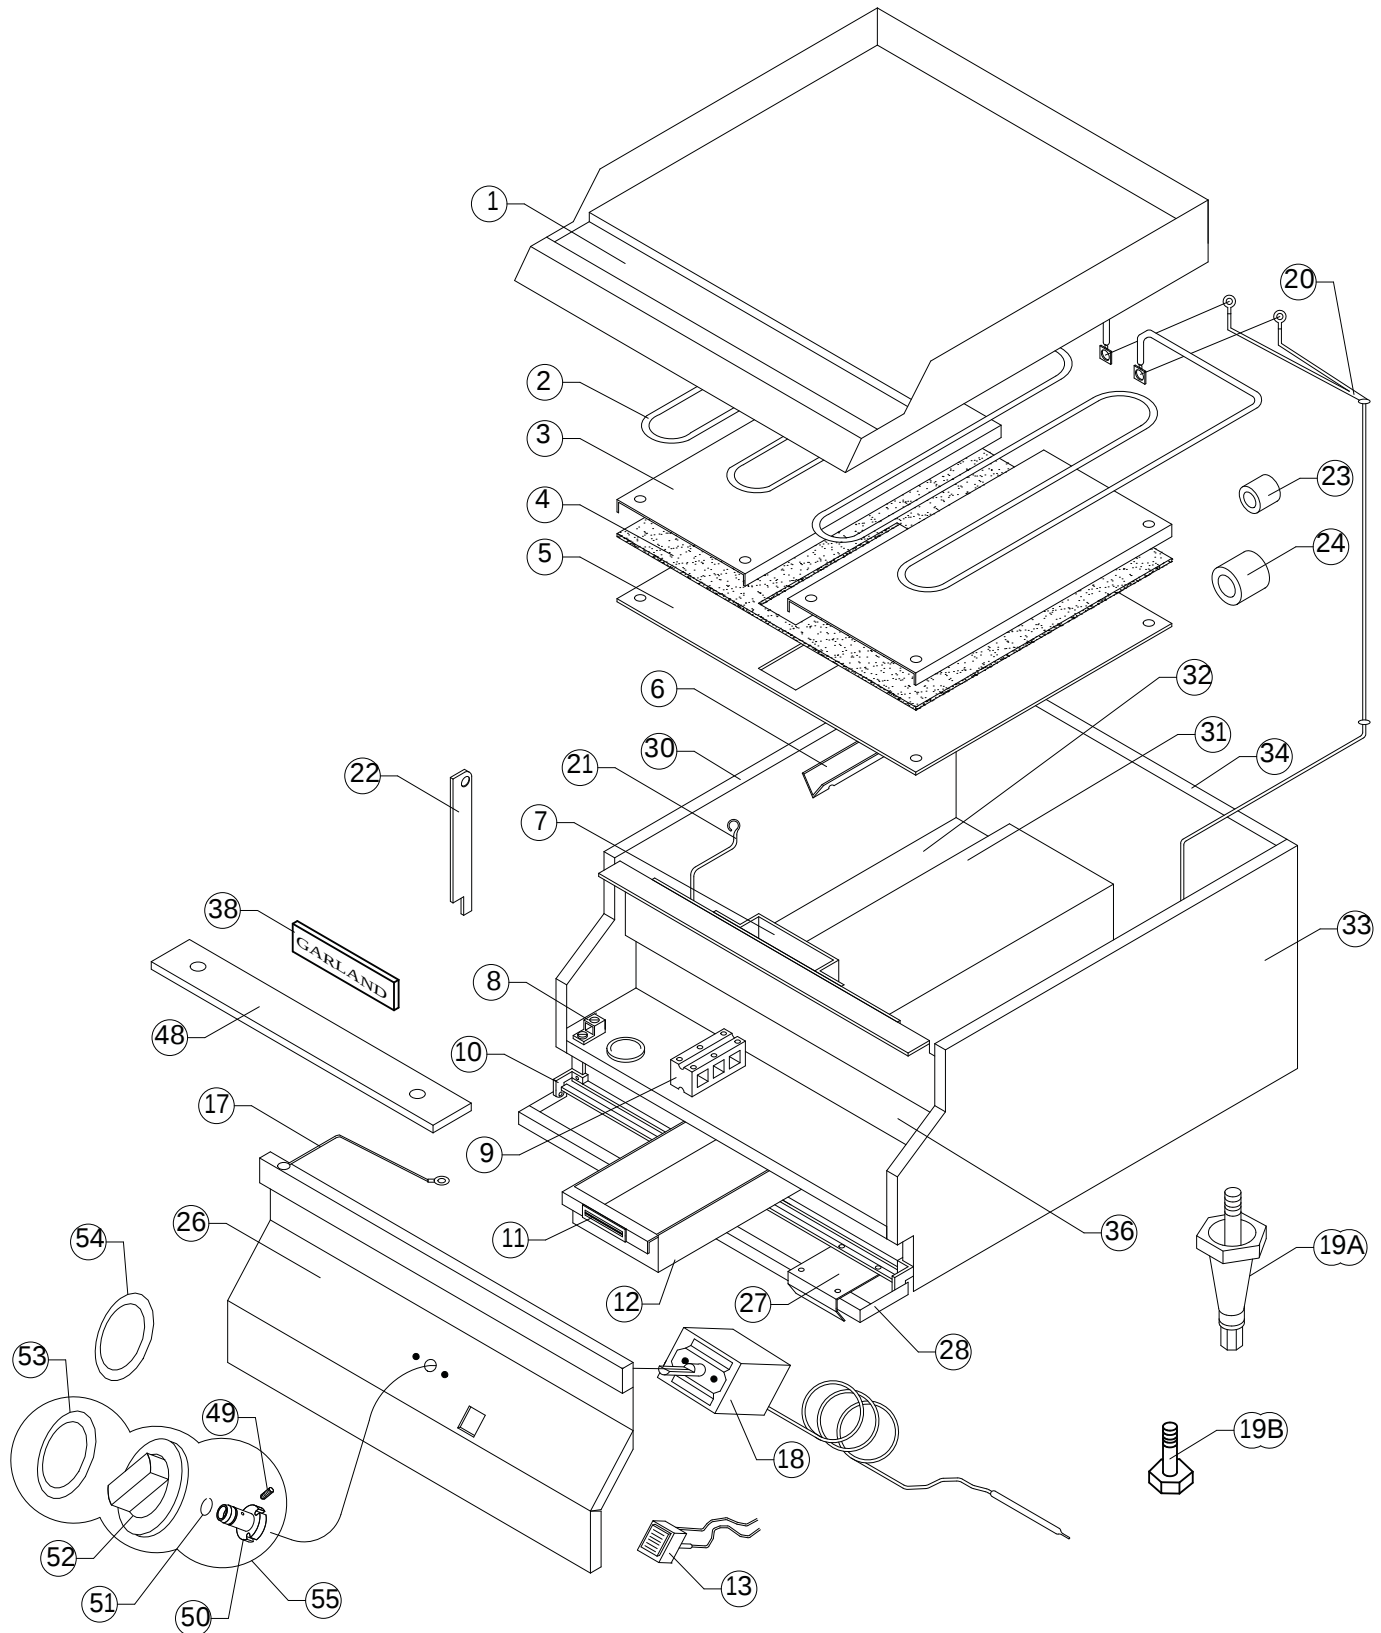

ED-15,24,36G-GRIDDLES

**GARLAND PARTS IDENTIFICATION**  
**Griddles ED/EDU-15G, ED/EDU-24G, ED/EDU-36G**

| ITEM | PART #                     | DESCRIPTION                                                                                                                                       | MODEL<br>QUANTITY |            |            | DATE     |           | CRITICAL |
|------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|------------|----------|-----------|----------|
|      |                            |                                                                                                                                                   | ED/EDU-15G        | ED/EDU-24G | ED/EDU-36G | FROM     | UP TO     |          |
| 1    | <a href="#">2142699</a>    | Griddle Assembly 15"                                                                                                                              | 1                 |            |            |          |           |          |
|      | <a href="#">2220399</a>    | 15" Grooved Griddle Assembly                                                                                                                      | 1                 |            |            |          |           |          |
|      | <a href="#">2151097</a>    | Griddle Assembly 24"                                                                                                                              |                   | 1          |            |          |           |          |
|      | <a href="#">2220499</a>    | 24" Griddle Assy Fully Grooved                                                                                                                    |                   | 1          |            |          |           |          |
|      | <a href="#">2220498</a>    | 24" Griddle Assy 12" Grooved LT                                                                                                                   |                   | 1          |            |          |           |          |
|      | <a href="#">2220497</a>    | 24" Griddle Assy 12" Grooved RT                                                                                                                   |                   | 1          |            |          |           |          |
|      | <a href="#">2151197</a>    | Griddle Assembly 36"                                                                                                                              |                   |            | 1          |          |           |          |
|      | <a href="#">2220599</a>    | 36" Griddle Assy Fully Grooved                                                                                                                    |                   |            | 1          |          |           |          |
|      | <a href="#">2220597</a>    | 36" Griddle Assy. 24" Grooved RT                                                                                                                  |                   |            | 1          |          |           |          |
|      | <a href="#">2220598</a>    | 36" Griddle Assy. 24" Grooved LT                                                                                                                  |                   |            | 1          |          |           |          |
|      | <a href="#">2220595</a>    | 36" Griddle Ass'y 12" Grooved LT                                                                                                                  |                   |            | 1          |          |           |          |
| 2    | <a href="#">G01816-1</a>   | <b>Element 208V, 3350W</b>                                                                                                                        | 1                 | 2          | 3          |          |           | C        |
|      | <a href="#">G01816-2</a>   | <b>Element 240V, 3350W</b>                                                                                                                        | 1                 | 2          | 3          |          |           | C        |
|      | <a href="#">G01816-3</a>   | <b>Element 220V, 3350W</b>                                                                                                                        | 1                 | 2          | 3          |          |           | C        |
|      | <a href="#">G01816-4</a>   | <b>Element 230 Volts<br/>EDU Models Only</b>                                                                                                      | 1                 | 2          | 3          |          |           | C        |
| 3    | <a href="#">G01884-1-6</a> | Element Clamp                                                                                                                                     | 2                 | 4          | 6          |          |           |          |
| 4    | <a href="#">4526300</a>    | Superwool 607 Biofriendly Insulation                                                                                                              | 1                 | 2          | 3          |          |           |          |
| 5    | <a href="#">2142700</a>    | Element Cover                                                                                                                                     | 1                 | 2          | 3          |          |           |          |
| 6    | <a href="#">G01891-1-6</a> | Bulb Clamp                                                                                                                                        | 1                 | 2          | 3          |          |           |          |
| 7    | <a href="#">2155499</a>    | Grease Chute Assembly                                                                                                                             | 1                 | 1          | 1          |          |           |          |
| 8    | <a href="#">G01500-1</a>   | Ground Terminal 55 Amp                                                                                                                            | 1                 | 1          | 1          |          |           |          |
| 9    | <a href="#">2147300</a>    | <b>Terminal Block 3 Circuit</b>                                                                                                                   | 1                 | 1          | 1          |          |           | C        |
|      | <a href="#">2147302</a>    | <b>Terminal Block 3 Circuit (Export, 2 Phase)</b>                                                                                                 | 1                 | 1          | 1          |          |           | C        |
|      | <a href="#">2147301</a>    | <b>Terminal Block-4 Circuit (Export, 3 Phase)</b>                                                                                                 | 1                 | 1          | 1          |          |           | C        |
| 10   | <a href="#">2149400</a>    | Door Hinge Right Hand                                                                                                                             | 1                 | 1          | 1          |          |           |          |
|      | <a href="#">2149401</a>    | Door Hinge Left Hand                                                                                                                              | 1                 | 1          | 1          |          |           |          |
| 11   | <a href="#">078174-1</a>   | <b>Magnetic Door Catch</b>                                                                                                                        | 1                 | 1          | 1          |          |           | C        |
| 12   | <a href="#">2142800</a>    | Grease Tray                                                                                                                                       | 1                 | 1          | 1          |          |           |          |
| 13   | <a href="#">2138500</a>    | <b>Amber Indicator Light (Obsolete, use <a href="#">CK4533018</a>)</b>                                                                            | 1                 | 2          | 3          |          | 30-Apr-16 | C        |
|      | <a href="#">CK4533018</a>  | <b>Service Kit for Indicator Light 250V Amber</b><br>Notes: Kit includes green rectangular 250V light 4533018 and amber rectangular lens 4533017. | 1                 | 2          | 3          | 1-May-16 |           | C        |
| 17   | <a href="#">2147700</a>    | Ground Wire                                                                                                                                       | 1                 | 1          | 1          |          |           |          |
| 18   | <a href="#">G2674-1</a>    | Thermostat G1 150F TO 450F                                                                                                                        | 1                 | 2          | 3          |          |           |          |
| 19A  | <a href="#">078109-2</a>   | 4" Adjustable Metal Leg                                                                                                                           | 4                 | 4          | 4          |          |           |          |
| 19B  | <a href="#">F157</a>       | Leveling Bolt-3/8-16x1 1/16"                                                                                                                      | 4                 | 4          | 4          |          |           |          |
| 19C* | <a href="#">G01503-10</a>  | Leg Weld Nut                                                                                                                                      | 4                 | 4          | 4          |          |           |          |
| 20   | <a href="#">2158900</a>    | Wire Harness                                                                                                                                      | 1                 |            |            |          |           |          |
|      | <a href="#">2158901</a>    | Wire Harness                                                                                                                                      |                   | 1          |            |          |           |          |
|      | <a href="#">2158902</a>    | Wire Harness                                                                                                                                      |                   |            | 1          |          |           |          |
| 21   | <a href="#">H87</a>        | 14 Ga Nickel Wire Bare 651ALLOY                                                                                                                   | 1                 | 1          | 1          |          |           |          |
| 22   | <a href="#">G2402-3-5</a>  | Top Support Prop                                                                                                                                  | 1                 | 1          | 1          |          |           |          |
| 23   | <a href="#">G01487-8</a>   | Heyco Bushing 11/16 ID                                                                                                                            | 1                 | 2          | 3          |          |           |          |
| 24   | <a href="#">G01487-5</a>   | Heyco Bushing 1-5/16 ID                                                                                                                           | 1                 | 1          | 1          |          |           |          |
| 25*  | <a href="#">2139700</a>    | Control Panel Clip                                                                                                                                | 2                 | 2          | 3          |          |           |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

**GARLAND PARTS IDENTIFICATION**  
**Griddles ED/EDU-15G, ED/EDU-24G, ED/EDU-36G**

| ITEM | PART #  | DESCRIPTION                                 | MODEL      |            |            | DATE      |           | CRITICAL |
|------|---------|---------------------------------------------|------------|------------|------------|-----------|-----------|----------|
|      |         |                                             | QUANTITY   |            |            | FROM      | UP TO     |          |
|      |         |                                             | ED/EDU-15G | ED/EDU-24G | ED/EDU-36G |           |           |          |
| 26   | 2137900 | Control Panel                               | 1          |            |            |           | 6-May-94  |          |
|      | 2349700 | Control Panel 15"                           | 1          |            |            | 6-May-94  |           |          |
|      | 2138000 | Control Panel                               |            | 1          |            |           | 23-Feb-94 |          |
|      | 2349800 | Control Panel 24"                           |            | 1          |            | 23-Feb-94 |           |          |
|      | 2138300 | Control Panel                               |            |            | 1          |           | 23-Feb-94 |          |
|      | 2350100 | Control Panel 36"                           |            |            | 1          | 23-Feb-94 |           |          |
| 27   | 2149300 | Door Pull                                   | 1          | 1          | 1          |           |           |          |
| 28   | 2149299 | Door Assembly 15"                           | 1          |            |            |           |           |          |
|      | 2149297 | Door Assembly 24"                           |            | 1          |            |           |           |          |
|      | 2149295 | Door Assembly 36"                           |            |            | 1          |           |           |          |
| 29*  | 2372800 | Body Side Stiffener                         | 2          | 2          | 2          |           |           |          |
| 30   | 2180699 | Body Side Assy LH Black (Code 9402CG0180)   | 1          | 1          | 1          |           |           |          |
|      | 2180698 | Body Side Assy LH S/S (Code 9402CG0180)     | 1          | 1          | 1          |           |           |          |
|      | 2349498 | Body Side Assembly LH (Code 9402CG0181)     | 1          | 1          | 1          |           |           |          |
|      | 2349496 | Body Side Assembly LH (Code 9402CG0181)     | 1          | 1          | 1          |           |           |          |
| 31   | 2156300 | Tray Cover                                  | 1          | 1          | 1          |           |           |          |
| 32   | 2149600 | Wireway                                     | 1          | 1          | 1          |           |           |          |
| 33   | 2180599 | Side Assembly RH (Code 9402CG0180)          | 1          | 1          | 1          |           |           |          |
|      | 2180598 | Side - Right Assembly S/S (Code 9402CG0180) | 1          | 1          | 1          |           |           |          |
|      | 2349499 | Body Side Assembly RH (Code 9402CG0181)     | 1          | 1          | 1          |           |           |          |
|      | 2349497 | Body Side Assembly RH (Code 9402CG0181)     | 1          | 1          | 1          |           |           |          |
| 34   | 2180900 | Body Back & Bottom                          | 1          |            |            |           |           |          |
|      | 2180901 | Body Back & Bottom S/S                      | 1          |            |            |           |           |          |
|      | 2181100 | Body Back & Bottom (24G)                    |            | 1          |            |           |           |          |
|      | 2181101 | Body Back & Bottom S/S                      |            | 1          |            |           |           |          |
|      | 2181400 | Body Back & Bottom (36G)                    |            |            | 1          |           |           |          |
|      | 2181401 | Body Back & Bottom S/S                      |            |            | 1          |           |           |          |
| 35*  | 2155700 | Grease Tray Slide                           | 2          | 2          | 2          |           |           |          |
| 36   | 2156199 | Control Shield Assembly                     | 1          |            |            |           | 3-Mar-94  |          |
|      | 2352299 | Control Shield Assembly                     | 1          |            |            | 3-Mar-94  |           |          |
|      | 2156999 | Control Shield Assembly                     |            | 1          |            |           | 23-Feb-94 |          |
|      | 2352499 | Control Shield Assembly                     |            | 1          |            | 23-Feb-94 |           |          |
|      | 2156699 | Control Shield Assembly                     |            |            | 1          |           | 23-Feb-94 |          |
|      | 2352399 | Control Shield Assembly                     |            |            | 1          | 23-Feb-94 |           |          |
| 37*  | 2174500 | Joiner Tab                                  | 2          | 2          | 2          |           |           |          |
| 38   | 4529725 | Garland Nameplate 4 7/8"                    | 1          | 1          | 1          |           |           |          |
| 39*  | 2144500 | Wiring Diagram                              |            |            |            |           |           |          |
| 40*  | 2144600 | Wiring Diagram                              |            |            |            |           |           |          |
| 41*  | 2144601 | Wiring Diagram, EDU-15G-CE VER.             |            |            |            |           |           |          |
| 42*  | 2144700 | Wiring Diagram                              |            |            |            |           |           |          |
| 43*  | 2144800 | Wiring Diagram                              |            |            |            |           |           |          |

\* NOT ILLUSTRATED


**RECOMMENDED STOCK PARTS**

**GARLAND PARTS IDENTIFICATION**  
**Griddles ED/EDU-15G, ED/EDU-24G, ED/EDU-36G**

| ITEM | PART #                  | DESCRIPTION                                   | MODEL      |            |            | DATE |       | CRITICAL |
|------|-------------------------|-----------------------------------------------|------------|------------|------------|------|-------|----------|
|      |                         |                                               | QUANTITY   |            |            |      |       |          |
|      |                         |                                               | ED/EDU-15G | ED/EDU-24G | ED/EDU-36G | FROM | UP TO |          |
| 44*  | 2144801                 | Wiring Diagram, EDU-24G-CE VER                |            |            |            |      |       |          |
| 45*  | 2144900                 | Wiring Diagram                                |            |            |            |      |       |          |
| 46*  | 2145000                 | Wiring Diagram                                |            |            |            |      |       |          |
| 47*  | 2145001                 | Wiring Diagram, EDU-36G-CE VER                |            |            |            |      |       |          |
| 48   | <a href="#">2285999</a> | Leg Channel Assembly 15"                      | 2          |            |            |      |       |          |
|      | <a href="#">2285997</a> | Leg Channel Assembly 24"                      |            | 2          |            |      |       |          |
|      | <a href="#">2285995</a> | Leg Channel Assembly 36"                      |            |            | 2          |      |       |          |
| 49   | <a href="#">F561</a>    | 10-32 – 3/16 Socket Head Screw                | 1          | 2          | 3          |      |       |          |
| 50   | <a href="#">3043207</a> | Knob Hub                                      | 1          | 2          | 3          |      |       |          |
| 51   | <a href="#">3043300</a> | Retaining Spring                              | 1          | 2          | 3          |      |       |          |
| 52   | <a href="#">3043100</a> | Dial                                          | 1          | 2          | 3          |      |       |          |
| 53   | <a href="#">2138800</a> | Dial Insert Degrees F                         | 1          | 2          | 3          |      |       |          |
| 54   | <a href="#">2138801</a> | Dial Insert Degrees C                         | 1          | 2          | 3          |      |       |          |
| 55   | <a href="#">4512111</a> | Dial Kit – Includes Items: 49, 50, 51, 52, 53 | 1          | 2          | 3          |      |       |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

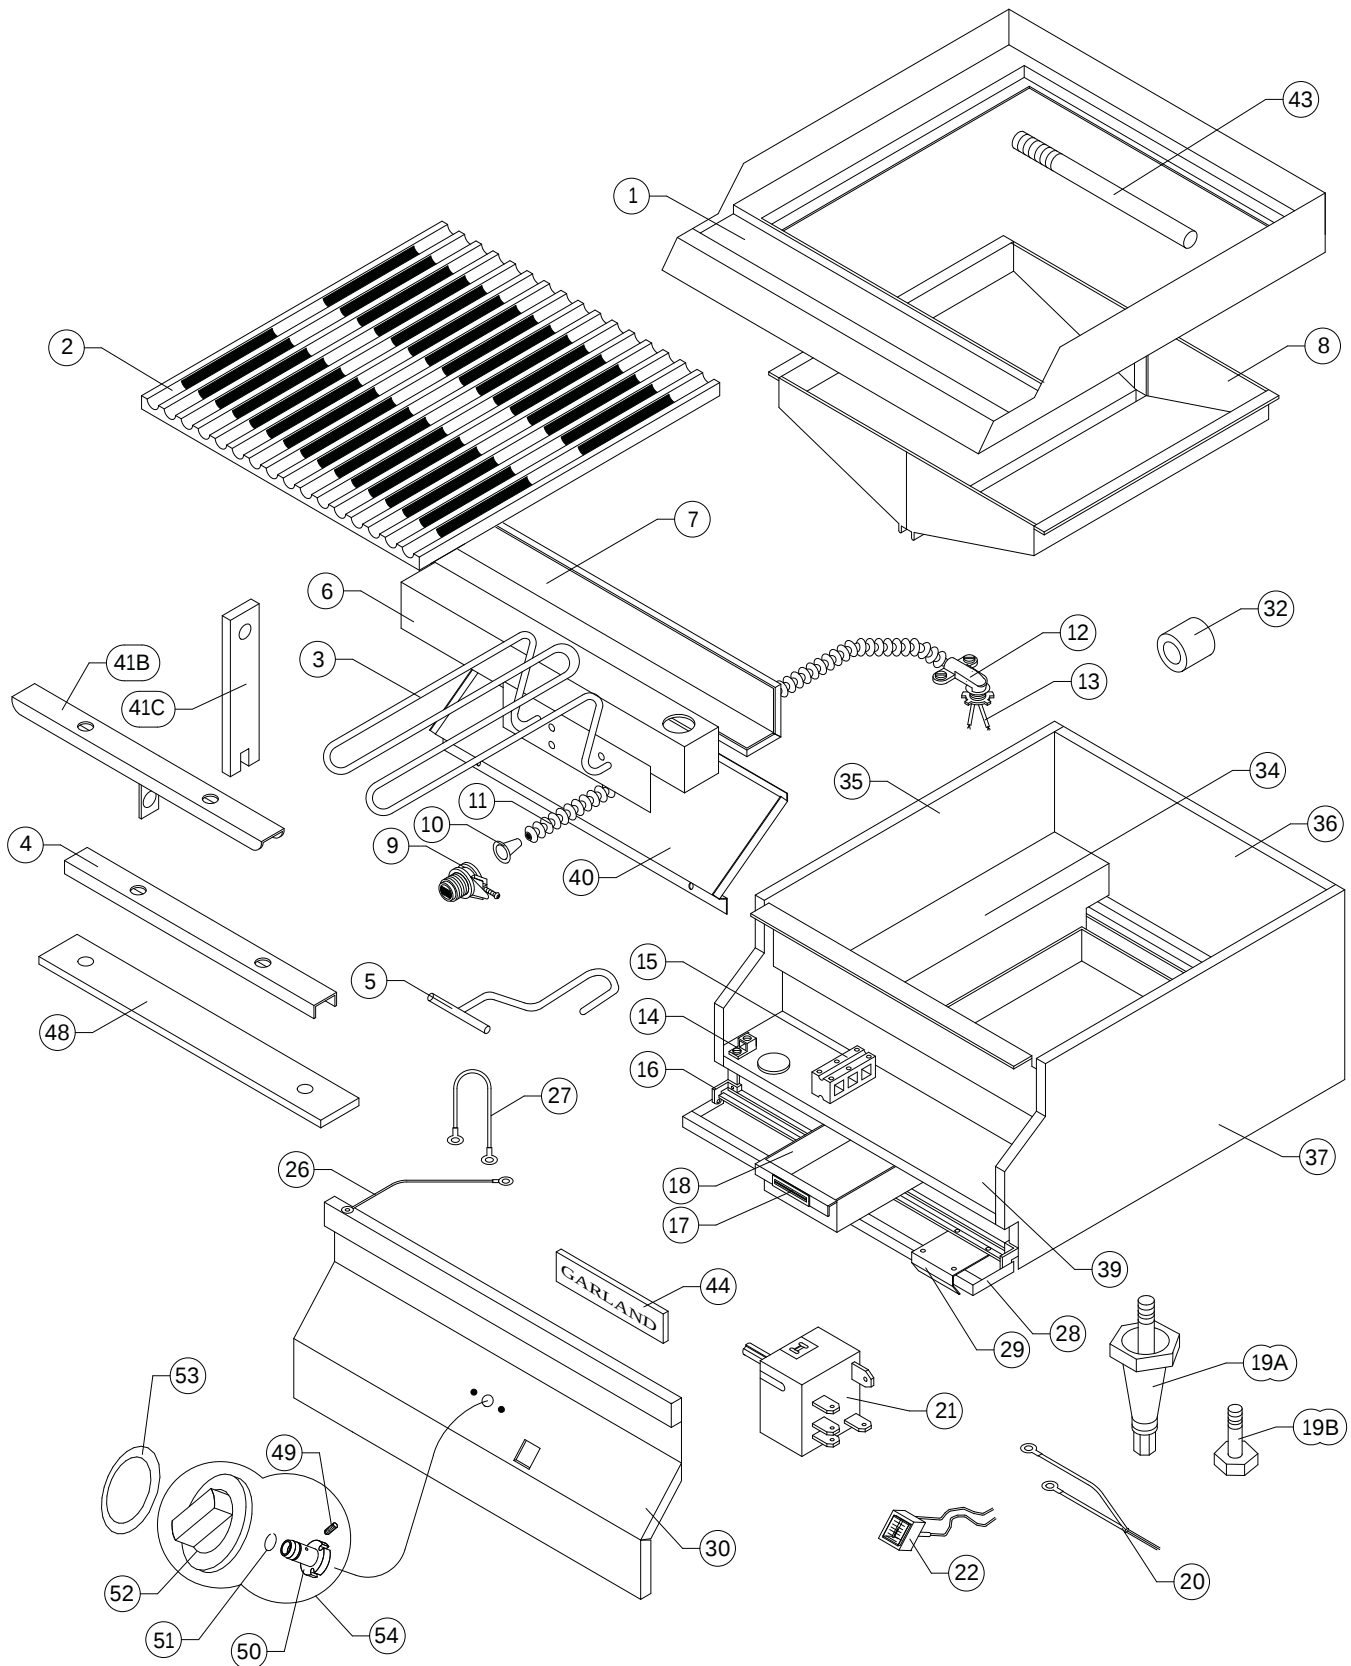

ED-15,30,42B BROILERS

**GARLAND PARTS IDENTIFICATION**  
**Broiler ED/EDU-15B, ED/EDU-30B, ED/EDU-42B**

| ITEM | PART #                     | DESCRIPTION                                                                                                                                       | MODEL<br>QUANTITY |            |            | DATE     |           | CRITICAL |
|------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------|------------|----------|-----------|----------|
|      |                            |                                                                                                                                                   | ED/EDU-15B        | ED/EDU-30B | ED/EDU-42B | FROM     | UP TO     |          |
| 1    | <a href="#">2134899</a>    | Main Top Assembly                                                                                                                                 | 1                 |            |            |          |           |          |
|      | <a href="#">2161499</a>    | Main Top Assembly                                                                                                                                 |                   | 1          |            |          |           |          |
|      | <a href="#">2165399</a>    | Main Top Assembly                                                                                                                                 |                   |            | 1          |          |           |          |
| 2    | <a href="#">G0844-1</a>    | Broiler Grate                                                                                                                                     | 1                 | 2          | 3          |          |           |          |
| 3    | <a href="#">G0875-2</a>    | <b>Element Broiler 208V, 1.35KW</b>                                                                                                               | 2                 | 4          | 6          |          |           | C        |
|      | <a href="#">G0875-1</a>    | <b>Element Broiler 240V, 1.35KW</b>                                                                                                               | 2                 | 4          | 6          |          |           | C        |
|      | <a href="#">G0875-4</a>    | <b>Element Broiler 220V, 1.35KW</b><br>Note: No Longer Available. Use <a href="#">G0875-5</a> .                                                   | 2                 | 4          | 6          |          |           |          |
|      | <a href="#">G0875-5</a>    | <b>Element Assy, 230V, 1350W</b><br><b>EDU Models Only</b>                                                                                        | 2                 | 4          | 6          |          |           | C        |
| 4    | <a href="#">4526176</a>    | Element Clamp                                                                                                                                     | 2                 | 4          | 6          |          |           |          |
| 5    | <a href="#">2135799</a>    | Grate Handle Assembly                                                                                                                             | 1                 | 1          | 1          |          |           |          |
| 6    | <a href="#">2135400</a>    | Element Terminal Box                                                                                                                              | 1                 | 2          | 3          |          |           |          |
| 7    | <a href="#">2135500</a>    | Element Terminal Box Cover                                                                                                                        | 1                 | 2          | 3          |          |           |          |
| 8    | <a href="#">2159499</a>    | Grease Collector Assembly                                                                                                                         | 1                 |            |            |          |           |          |
|      | <a href="#">2162199</a>    | Grease Collector Assembly                                                                                                                         |                   | 1          |            |          |           |          |
|      | <a href="#">2165899</a>    | Grease Collector Assembly                                                                                                                         |                   |            | 1          |          |           |          |
| 9    | <a href="#">G01497-1</a>   | Bx Connector Straight 3/8"                                                                                                                        | 1                 | 2          | 3          |          |           |          |
| 10   | <a href="#">1029600</a>    | Antishots # 1                                                                                                                                     | 2                 | 4          | 6          |          |           |          |
| 11   | <a href="#">1029400</a>    | BX Cable 3/8"                                                                                                                                     | 1                 | 2          | 3          |          |           |          |
| 12   | <a href="#">1028500</a>    | Connector 3/8" 90 DEG. Romex                                                                                                                      | 1                 | 2          | 3          |          |           |          |
| 13   | <a href="#">2159100</a>    | Element Wires                                                                                                                                     | 1                 | 2          | 3          |          |           |          |
| 14   | <a href="#">G01500-1</a>   | Ground Terminal 55 Amp                                                                                                                            | 1                 | 1          | 1          |          |           |          |
| 15   | <a href="#">2147300</a>    | <b>Terminal Block 3 Circuit</b>                                                                                                                   | 1                 | 1          | 1          |          |           | C        |
|      | <a href="#">2147302</a>    | <b>Terminal Block 3 Circuit (Export, 2 Phase)</b>                                                                                                 | 1                 | 1          |            |          |           | C        |
|      | <a href="#">2147301</a>    | <b>Terminal Block 4 Circuit (Export, 3 Phase)</b>                                                                                                 |                   |            | 1          |          |           | C        |
| 16   | <a href="#">2149400</a>    | Door Hinge Right Hand                                                                                                                             | 1                 | 1          | 1          |          |           |          |
|      | <a href="#">2149401</a>    | Door Hinge Left Hand                                                                                                                              | 1                 | 1          | 1          |          |           |          |
| 17   | <a href="#">078174-1</a>   | <b>Magnetic Door Catch</b>                                                                                                                        | 1                 | 1          | 1          |          |           | C        |
| 18   | <a href="#">2142800</a>    | Grease Tray                                                                                                                                       | 1                 | 1          |            |          |           |          |
|      | <a href="#">2222900</a>    | Grease Tray                                                                                                                                       |                   |            | 1          |          |           |          |
| 19A  | <a href="#">078109-2</a>   | 4" Adjustable Metal Leg                                                                                                                           | 4                 | 4          | 4          |          |           |          |
| 19B  | <a href="#">F157</a>       | Bolt-3/8-16x1 1/16"                                                                                                                               | 4                 | 4          | 4          |          |           |          |
| 19C* | <a href="#">G01503-10</a>  | Leg Weld Nut                                                                                                                                      | 4                 | 4          | 4          |          |           |          |
| 20   | <a href="#">2159000</a>    | Primary Wires                                                                                                                                     | 1                 |            |            |          |           |          |
|      | <a href="#">2159001</a>    | Primary Wires                                                                                                                                     |                   | 1          |            |          |           |          |
|      | <a href="#">2159002</a>    | Primary Wires                                                                                                                                     |                   |            | 1          |          |           |          |
| 21   | <a href="#">CKG03185-2</a> | <b>Infinite Switch-240 Volt</b>                                                                                                                   | 1                 | 2          | 3          |          |           | C        |
| 22   | <a href="#">2138504</a>    | <b>Green Indicator Light (Obsolete, use <a href="#">CK4533015</a>)</b>                                                                            | 1                 | 2          | 3          |          | 30-Apr-16 | C        |
|      | <a href="#">CK4533015</a>  | <b>Service Kit for Indicator Light 250V Green</b><br>Notes: Kit includes green rectangular 250V light 4533015 and green rectangular lens 4533016. | 1                 | 2          | 3          | 1-May-16 |           | C        |
| 26   | <a href="#">2147700</a>    | Ground Wire                                                                                                                                       | 1                 | 1          | 1          |          |           |          |
| 27   | <a href="#">2159101</a>    | Element Wires                                                                                                                                     | 2                 | 4          | 6          |          |           |          |
| 28   | <a href="#">2149299</a>    | Door Assembly 15"                                                                                                                                 | 1                 |            |            |          |           |          |
|      | <a href="#">2149296</a>    | Door Assembly 30"                                                                                                                                 |                   | 1          |            |          |           |          |
|      | <a href="#">2149289</a>    | Door Assembly 42"                                                                                                                                 |                   |            | 1          |          |           |          |
| 29   | <a href="#">2149300</a>    | Door Pull                                                                                                                                         | 1                 | 1          | 1          |          |           |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

**GARLAND PARTS IDENTIFICATION**  
**Broiler ED/EDU-15B, ED/EDU-30B, ED/EDU-42B**

| ITEM | PART #   | DESCRIPTION                                 | MODEL      |            |            | DATE      |           | CRITICAL |
|------|----------|---------------------------------------------|------------|------------|------------|-----------|-----------|----------|
|      |          |                                             | QUANTITY   |            |            |           |           |          |
|      |          |                                             | ED/EDU-15B | ED/EDU-30B | ED/EDU-42B | FROM      | UNTO      |          |
| 30   | 2137900  | Control Panel                               | 1          |            |            |           | 6-May-94  |          |
|      | 2349700  | Control 15"                                 | 1          |            |            | 6-May-94  |           |          |
|      | 2138100  | Control Panel                               |            | 1          |            |           | 4-Apr-94  |          |
|      | 2349900  | Control Panel 30"                           |            | 1          |            | 4-Apr-94  |           |          |
|      | 2139400  | Control Panel                               |            |            | 1          |           | 28-Mar-94 |          |
|      | 2350200  | Control Panel 42"                           |            |            | 1          | 28-Mar-94 |           |          |
| 31*  | 2139700  | Control Panel Clip                          | 2          | 2          | 3          |           |           |          |
| 32   | G01487-5 | Heyco Bushing 1-5/16 ID                     | 1          | 1          | 1          |           |           |          |
| 33*  | 2155700  | Grease Tray Slide                           | 2          | 2          | 2          |           |           |          |
| 34   | 2149600  | Wireway                                     | 1          | 1          | 1          |           |           |          |
| 35   | 2180699  | Body Side Assy LH - Black (Code 9402CG0180) | 1          | 1          | 1          |           |           |          |
|      | 2180698  | Body Side Assy LH S/S (Code 9402CG0180)     | 1          | 1          | 1          |           |           |          |
|      | 2349498  | Body Side Assembly LH (Code 9402CG0181)     | 1          | 1          | 1          |           |           |          |
|      | 2349496  | Body Side Assembly LH (Code 9402CG0181)     | 1          | 1          | 1          |           |           |          |
| 36   | 2181000  | Body Back & Bottom                          | 1          |            |            |           |           |          |
|      | 2181001  | Body Back & Bottom S/S                      | 1          |            |            |           |           |          |
|      | 2181200  | Body Back & Bottom (30B)                    |            | 1          |            |           |           |          |
|      | 2181201  | Body Back & Bottom S/S                      |            | 1          |            |           |           |          |
|      | 2181500  | Body Back & Bottom (42B)                    |            |            | 1          |           |           |          |
|      | 2181501  | Body Back & Bottom S/S                      |            |            | 1          |           |           |          |
| 37   | 2180599  | Side Assembly RH (Code 9402CG0180)          | 1          | 1          | 1          |           |           |          |
|      | 2180598  | Side -Right Assembly S/S (Code 9402CG0180)  | 1          | 1          | 1          |           |           |          |
|      | 2349499  | Body Side Assembly RH (Code 9402CG0181)     | 1          | 1          | 1          |           |           |          |
|      | 2349497  | Body Side Assembly RH (Code 9402CG0181)     | 1          | 1          | 1          |           |           |          |
| 38*  | 22174500 | Joiner Tab                                  | 2          | 2          | 2          |           |           |          |
| 39   | 2135199  | Control Shield Assembly                     | 1          |            |            |           | 3-Mar-94  |          |
|      | 2352199  | Control Shield Assembly                     | 1          |            |            | 3-Mar-94  |           |          |
|      | 2161699  | Control Shield Assembly                     |            | 1          |            |           | 4-Apr-94  |          |
|      | 2352699  | Control Shield Assembly                     |            | 1          |            | 4-Apr-94  |           |          |
|      | 2165299  | Control Shield Assembly                     |            |            | 1          |           | 3-Mar-94  |          |
|      | 2352799  | Control Shield Assembly                     |            |            | 1          | 3-Mar-94  |           |          |
| 40   | 2135600  | Shield                                      | 1          | 2          | 3          |           |           |          |
| 41B  | 4526178  | Prop Hanger                                 | 1          | 2          | 3          |           |           |          |
| 41C  | 2436100  | Prop                                        | 1          | 2          | 3          |           |           |          |
| 43   | 2159800  | Grate Stop                                  | 1          | 2          | 3          |           |           |          |
| 44   | 4529725  | Garland Nameplate 4 7/8"                    | 1          | 1          | 1          |           |           |          |
| 45*  | 2145100  | Wiring Diagram ED-15B-Domestic              | 1          |            |            |           |           |          |
|      | 2145200  | Wiring Diagram ED-15B-Exp                   | 1          |            |            |           |           |          |
|      | 2145201  | Wiring Diagram -EDU-15B-CE VER.             | 1          |            |            |           |           |          |
| 46*  | 2155300  | Wiring Diagram ED-30B-Domestic              |            | 1          |            |           |           |          |
|      | 2145400  | Wiring Diagram ED-30B-Exp.                  |            | 1          |            |           |           |          |
|      | 2145401  | Wiring Diagram -EDU-30B-CE VER.             |            | 1          |            |           |           |          |
| 47*  | 2145500  | Wiring Diagram ED-42B-Domestic              |            |            | 1          |           |           |          |
|      | 2145600  | Wiring Diagram ED-42B-Exp.                  |            |            | 1          |           |           |          |
|      | 2145601  | Wiring Diagram EDU-42B-CE VER.              |            |            | 1          |           |           |          |

\* NOT ILLUSTRATED


**RECOMMENDED STOCK PARTS**

**GARLAND PARTS IDENTIFICATION**  
**Broiler ED/EDU-15B, ED/EDU-30B, ED/EDU-42B**

| ITEM | PART #  | DESCRIPTION                               | MODEL      |            |            | DATE |      | CRITICAL |
|------|---------|-------------------------------------------|------------|------------|------------|------|------|----------|
|      |         |                                           | QUANTITY   |            |            | FROM | UNTO |          |
|      |         |                                           | ED/EDU-15B | ED/EDU-30B | ED/EDU-42B |      |      |          |
| 48   | 2285999 | Leg Channel Assembly 15"                  | 2          |            |            |      |      |          |
|      | 2285996 | Leg Channel Assembly 30"                  |            | 2          |            |      |      |          |
|      | 2285994 | Leg Channel Assembly 42"                  |            |            | 2          |      |      |          |
| 49   | F561    | 10-32 – 3/16 Socket Head Screw            | 2          | 2          | 2          |      |      |          |
| 50   | 3043207 | Knob Hub                                  | 2          | 2          | 2          |      |      |          |
| 51   | 3043300 | Retaining Spring                          | 2          | 2          | 2          |      |      |          |
| 52   | 3043100 | Dial                                      | 2          | 2          | 2          |      |      |          |
| 53   | 2139000 | Dial Insert                               | 2          | 2          | 2          |      |      |          |
| 54   | 4512224 | Dial Kit – Includes Items: 49, 50, 51, 52 | 2          | 2          | 2          |      |      |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

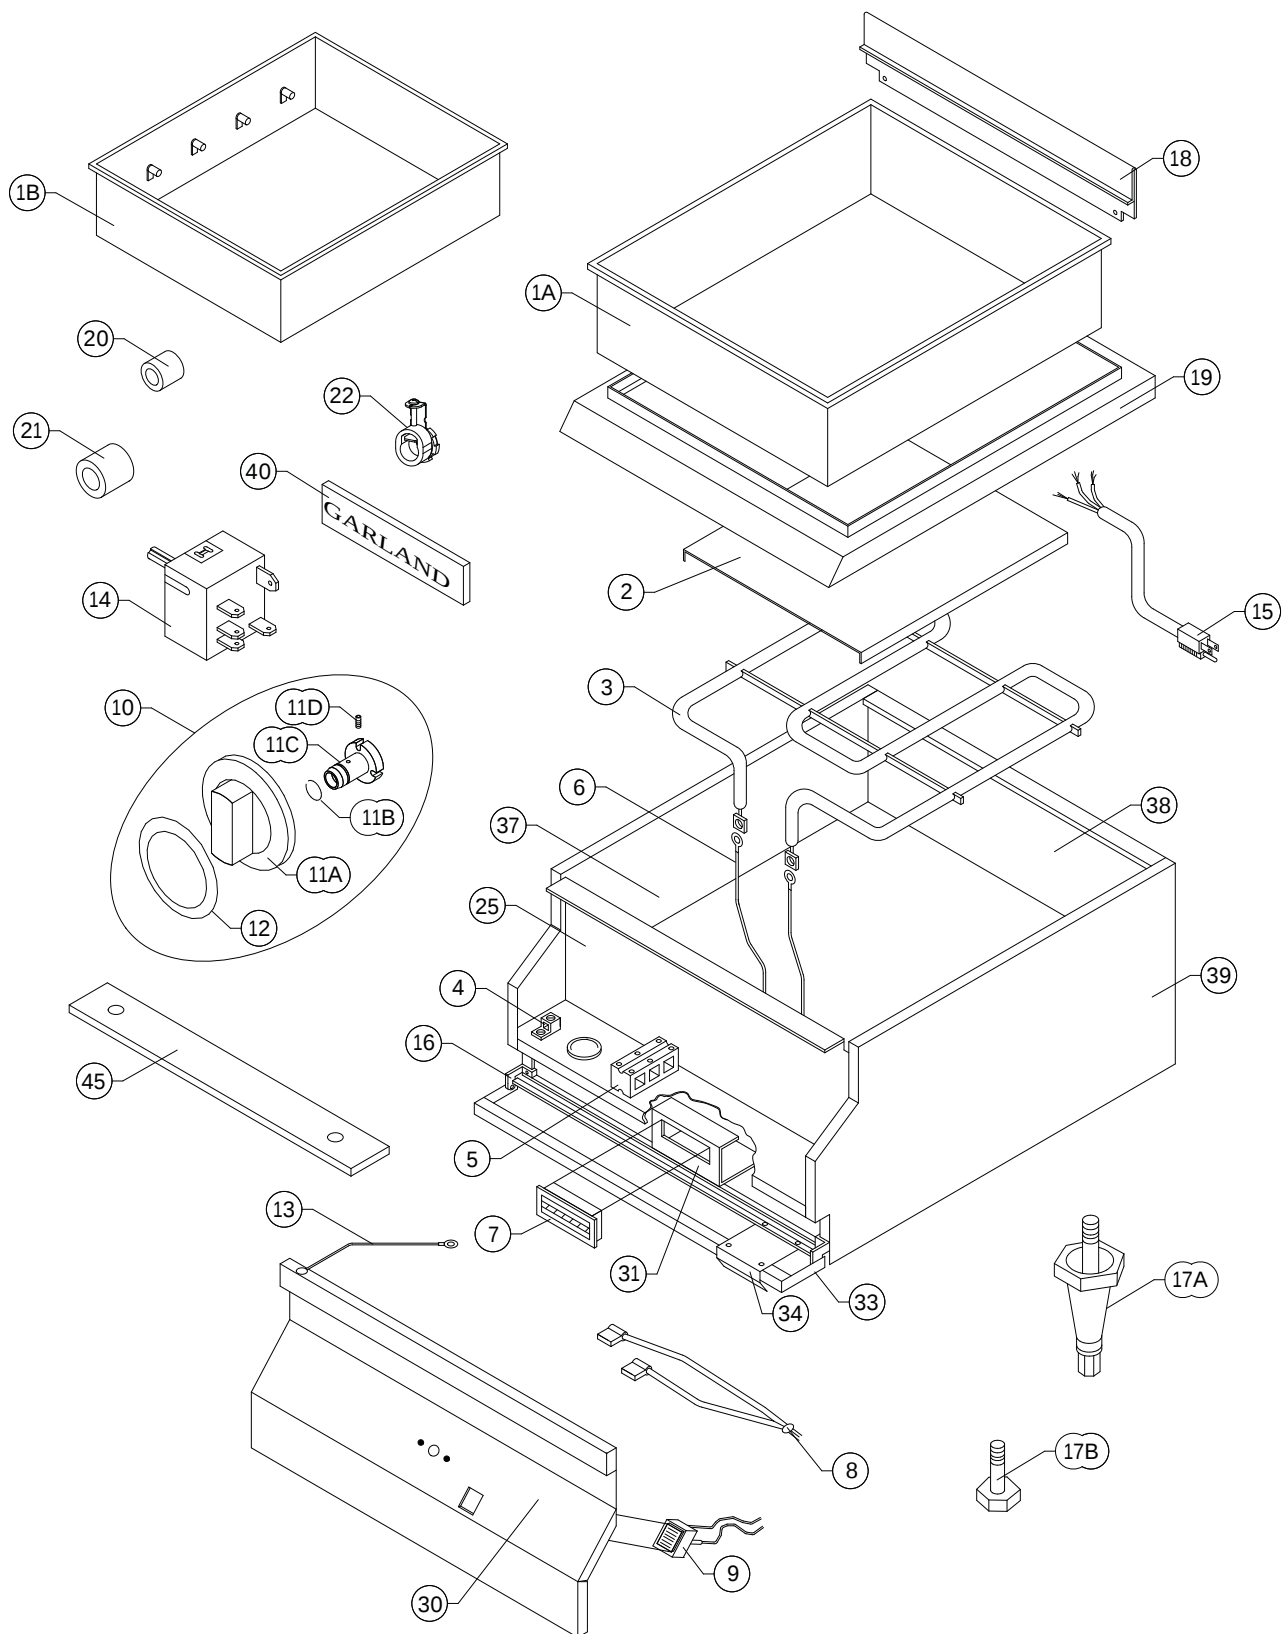

ED-15-W,P Food Warmer

**GARLAND PARTS IDENTIFICATION**  
**Food Warmer ED/EDU-15W, ED-15WP**

| ITEM | PART #                     | DESCRIPTION                                                                                                                                       | MODEL      |         | DATE      |           | CRITICAL |
|------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|-----------|-----------|----------|
|      |                            |                                                                                                                                                   | QTY        |         |           |           |          |
|      |                            |                                                                                                                                                   | ED/EDU-15W | ED-15WP | FROM      | UP TO     |          |
| 1A   | <a href="#">2186100</a>    | <b>Food Warmer Tank</b>                                                                                                                           | 1          | 1       |           |           | C        |
| 1B   | <a href="#">2186199</a>    | <b>Food Well With Pan Stop (Tim Hortons Only)</b>                                                                                                 |            | 1       |           |           | C        |
| 2    | <a href="#">2156400</a>    | Element Plate                                                                                                                                     | 1          | 1       |           |           |          |
| 3    | <a href="#">G0569-1</a>    | <b>Element 120V, 1KW</b>                                                                                                                          |            | 1       |           |           | C        |
|      | <a href="#">G0569-2</a>    | <b>Element 208V, 1KW</b>                                                                                                                          | 1          |         |           |           | C        |
|      | <a href="#">G0569-3</a>    | <b>Element 240V, 1KW</b>                                                                                                                          | 1          |         |           |           | C        |
|      | <a href="#">G0569-5</a>    | <b>Element 230V, 1.1KW<br/>EDU Models Only</b>                                                                                                    | 1          |         |           |           | C        |
| 4    | <a href="#">G01500-1</a>   | Ground Terminal 55 Amp                                                                                                                            | 1          | 1       |           |           |          |
| 5    | <a href="#">2147300</a>    | Terminal Block 3 Circuit                                                                                                                          | 1          | 1       |           |           |          |
|      | <a href="#">2147302</a>    | Terminal Block 3 Circuit Export                                                                                                                   |            |         |           |           |          |
| 6    | <a href="#">2148300</a>    | Element Wires                                                                                                                                     | 1          | 1       |           |           |          |
| 7    | <a href="#">078174-1</a>   | <b>Magnetic Door Catch</b>                                                                                                                        | 1          | 1       |           |           | C        |
| 8    | <a href="#">2148200</a>    | Primary Wires                                                                                                                                     |            | 1       |           |           |          |
|      | <a href="#">2148201</a>    | Primary Wires                                                                                                                                     | 1          |         |           |           |          |
| 9    | <a href="#">2138504</a>    | <b>Green Indicator Light (Obsolete, use <a href="#">CK4533015</a>)</b>                                                                            | 1          | 1       |           | 30-Apr-16 | C        |
|      | <a href="#">CK4533015</a>  | <b>Service Kit for Indicator Light 250V Green</b><br>Notes: Kit includes green rectangular 250V light 4533015 and green rectangular lens 4533016. | 1          | 1       | 1-May-16  |           | C        |
| 10   | <a href="#">4512115</a>    | Knob Kit <a href="#">2138700</a> , <a href="#">2139000</a><br>Include Items # 11A, 11B, 11C, 11D & 12                                             | 1          | 1       |           |           |          |
| 11A  | <a href="#">3043100</a>    | Dial                                                                                                                                              | 1          | 1       |           |           |          |
| 11B  | <a href="#">3043300</a>    | Retaining Spring                                                                                                                                  | 1          | 1       |           |           |          |
| 11C  | <a href="#">3043207</a>    | Knob Hub                                                                                                                                          | 1          | 1       |           |           |          |
| 11D  | <a href="#">F561</a>       | 10-32 – 3/16 Socket Head Screw                                                                                                                    | 1          | 1       |           |           |          |
| 12   | <a href="#">2139000</a>    | Dial Insert                                                                                                                                       | 1          | 1       |           |           |          |
| 13   | <a href="#">2147700</a>    | Ground Wire                                                                                                                                       | 1          | 1       |           |           |          |
| 14   | <a href="#">CKG03185-1</a> | <b>Infinite Switch-120 Volt</b>                                                                                                                   |            | 1       |           |           | C        |
|      | <a href="#">CKG03185-2</a> | <b>Infinite Switch-240 Volt</b>                                                                                                                   | 1          |         |           |           | C        |
| 15   | <a href="#">4523398</a>    | Power Cord 6Ft 3/14Ga 15Amp SJ00W                                                                                                                 |            | 1       |           |           |          |
| 16   | <a href="#">2149400</a>    | Door Hinge Right Hand                                                                                                                             | 1          | 1       |           |           |          |
|      | <a href="#">2149401</a>    | Door Hinge Left Hand                                                                                                                              | 1          | 1       |           |           |          |
| 17A  | <a href="#">078109-2</a>   | 4" Adjustable Metal Leg                                                                                                                           | 4          | 4       |           |           |          |
| 17B  | <a href="#">F157</a>       | Leveling Bolt-3/8-16x1 1/16"                                                                                                                      | 4          | 4       |           |           |          |
| 17C* | <a href="#">G01503-10</a>  | Leg Weld Nut                                                                                                                                      | 4          | 4       |           |           |          |
| 18   | <a href="#">2168000</a>    | Back Splash to 12/07/95                                                                                                                           | 1          | 1       |           |           |          |
|      | <a href="#">2385500</a>    | Back Splash from 12/07/95                                                                                                                         | 1          | 1       |           |           |          |
| 19   | <a href="#">2133700</a>    | Main Top                                                                                                                                          | 1          | 1       |           |           |          |
| 20   | <a href="#">G01487-8</a>   | Heyco Bushing 11/16 ID                                                                                                                            | 1          | 1       |           |           |          |
| 21   | <a href="#">G01487-5</a>   | Heyco Bushing 1-5/16 ID                                                                                                                           | 1          | 1       |           |           |          |
| 22   | <a href="#">G01497-1</a>   | Bx Connector Straight 3/8"                                                                                                                        | 1          | 1       |           |           |          |
| 23*  | <a href="#">G0577-1-6</a>  | Element Baffle Pan                                                                                                                                | 1          | 1       |           |           |          |
| 24*  | <a href="#">1472205</a>    | Insulation 17 x 12 x 1                                                                                                                            | 1          | 1       |           |           |          |
| 25   | <a href="#">2133899</a>    | Control Shield Assembly                                                                                                                           | 1          | 1       |           | 18-Aug-94 |          |
|      | <a href="#">2352099</a>    | Control Shield Assembly                                                                                                                           | 1          | 1       | 18-Aug-94 |           |          |
| 26*  | <a href="#">079113-1</a>   | Fibrefrac 970J 1/8"                                                                                                                               | 1          | 1       |           |           |          |
| 27*  | <a href="#">2133999</a>    | Element Tray Assembly                                                                                                                             | 1          | 1       |           |           |          |
| 28*  | <a href="#">2134000</a>    | Side Liner                                                                                                                                        | 2          | 2       |           |           |          |
| 29*  | <a href="#">2134500</a>    | Front Liner                                                                                                                                       | 1          | 1       |           |           |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

## GARLAND PARTS IDENTIFICATION


### Food Warmer ED/EDU-15W, ED-15WP

| ITEM | PART #                  | DESCRIPTION                                 | MODEL QTY  |         | DATE     |          | CRITICAL |
|------|-------------------------|---------------------------------------------|------------|---------|----------|----------|----------|
|      |                         |                                             | ED/EDU-15W | ED-15WP | FROM     | UP TO    |          |
| 30   | 2137900                 | Control Panel                               | 1          | 1       |          | 6-May-94 |          |
|      | 2349700                 | Control Panel 15"                           | 1          | 1       | 6-May-94 |          |          |
| 31   | 2139600                 | Magnet Mounting Bracket                     | 1          | 1       |          | 7-May-94 |          |
|      | <a href="#">2183500</a> | Magnet Bracket                              | 1          | 1       | 7-May-94 |          |          |
| 32*  | <a href="#">2139700</a> | Control Panel Clip                          | 2          | 2       |          |          |          |
| 33   | <a href="#">2149299</a> | Door Assembly 15"                           | 1          | 1       |          |          |          |
| 34   | 2149300                 | Door Pull                                   | 1          | 1       |          |          |          |
| 35*  | 2149600                 | Wireway                                     | 1          | 1       |          |          |          |
| 36*  | <a href="#">2174500</a> | Joiner Tab                                  | 2          | 2       |          |          |          |
| 37   | <a href="#">2180699</a> | Side Assembly LH - Black (Code 9402CG0180)  | 1          | 1       |          |          |          |
|      | <a href="#">2180698</a> | Side - Left Assembly S/S (Code 9402CG0180)  | 1          | 1       |          |          |          |
|      | <a href="#">2349498</a> | Body Side Assembly LH (Code 9402CG0181)     | 1          | 1       |          |          |          |
|      | <a href="#">2349496</a> | Body Side Assembly LH (Code 9402CG0181)     | 1          | 1       |          |          |          |
| 38   | 2181000                 | Body Back & Bottom                          | 1          | 1       |          |          |          |
|      | 2181001                 | Body Back & Bottom S/S                      | 1          | 1       |          |          |          |
| 39   | 2180599                 | Side Assembly RH (Code 9402CG0180)          | 1          | 1       |          |          |          |
|      | 2180598                 | Side - Right Assembly S/S (Code 9402CG0180) | 1          | 1       |          |          |          |
|      | <a href="#">2349499</a> | Body Side Assembly RH (Code 9402CG0181)     | 1          | 1       |          |          |          |
|      | <a href="#">2349497</a> | Body Side Assembly RH (Code 9402CG0181)     | 1          | 1       |          |          |          |
| 40   | <a href="#">4529725</a> | Garland Nameplate 4 7/8"                    | 1          | 1       |          |          |          |
| 41*  | 2146500                 | Wiring Diagram Domestic ED-15W              | 1          |         |          |          |          |
| 42*  | 2146600                 | Wiring Diagram Export ED-15W                | 1          |         |          |          |          |
| 43*  | 2146601                 | Wiring Diagram EDU-15W CE                   | 1          |         |          |          |          |
| 44*  | 2146700                 | Wiring Diagram ED-15WP                      |            | 1       |          |          |          |
| 45   | <a href="#">2285999</a> | Leg Channel Assembly 15"                    | 2          | 2       |          |          |          |


\* NOT ILLUSTRATED

#### **RECOMMENDED STOCK PARTS**


Blank Page

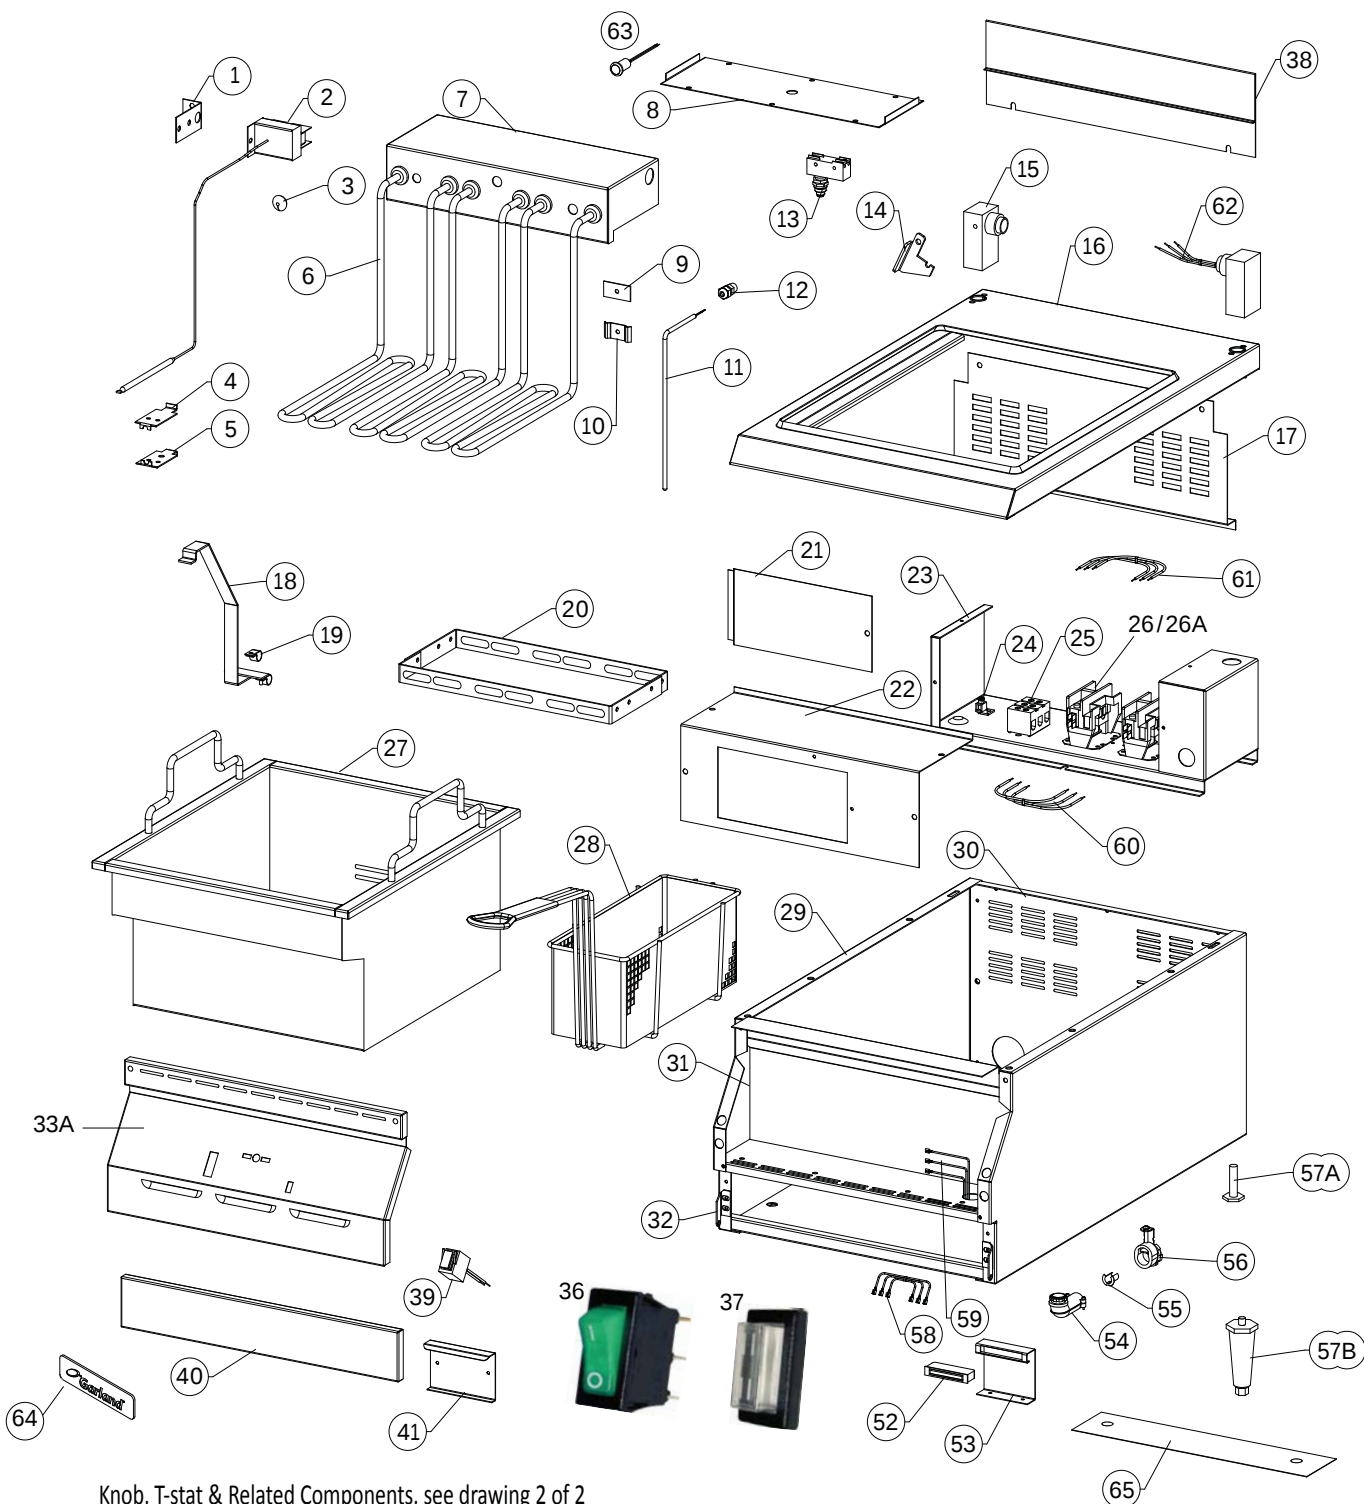


Knob, T-stat & Related Components, see drawing 2 of 2

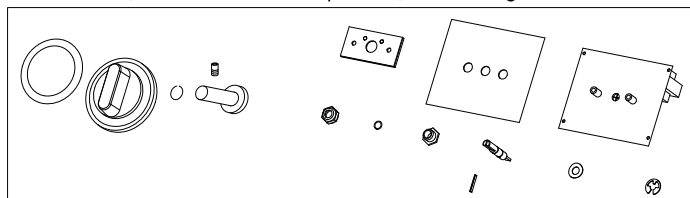


80 - 83 (Wiring Diagrams)



T-stat & Related Components for Units Built UP TO 27-Jan/2010

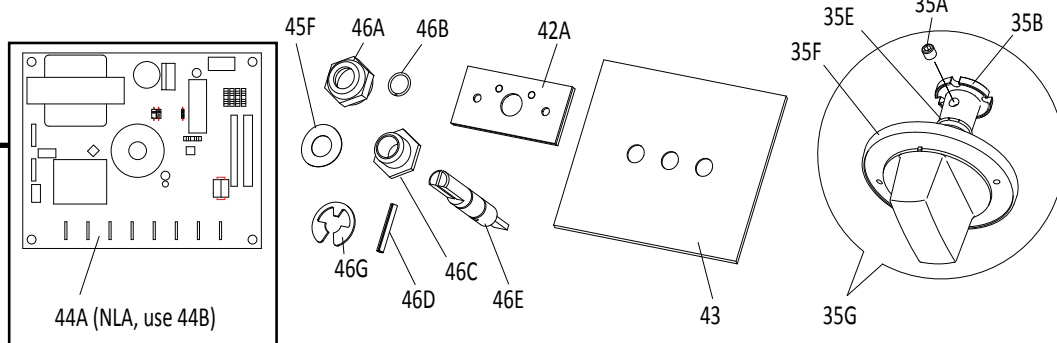

T-Stat & Related Components for Units Built  
BETWEEN 28-Jan/2010 and 9-Apr/2012

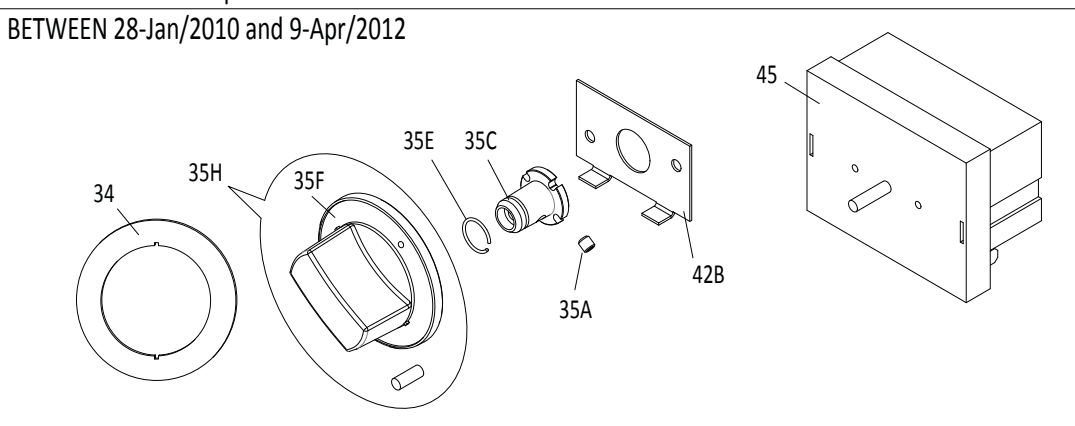


44B T-Stat Kit

Illustration shows T-stat & Related Components for Units Built

FROM:

(date) 9-Apr/2012

(serial#) 1204100100470

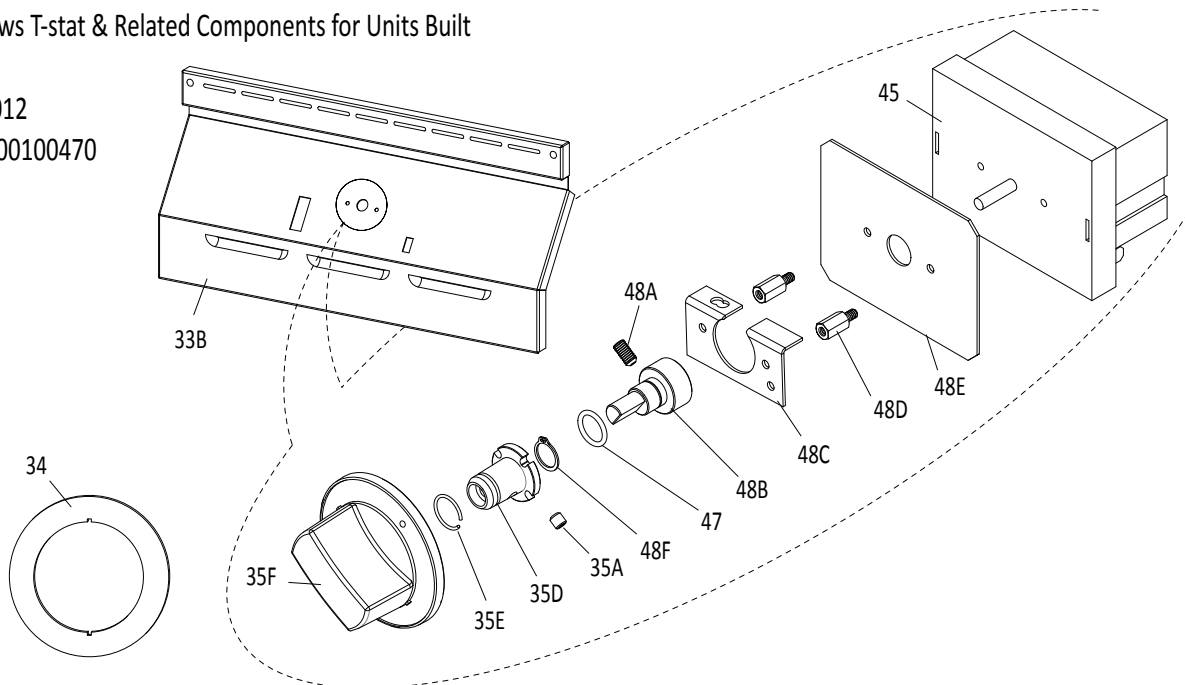

# GARLAND PARTS IDENTIFICATION

## ED Super Fryers

### ED-15SF / ED-30SFT / EDU-18SF / EDU-36SFT

| ITEM | PART#                     | DESCRIPTION                           | QTY     |          |          |           | FROM DATE | UP TO DATE | CRITICAL |
|------|---------------------------|---------------------------------------|---------|----------|----------|-----------|-----------|------------|----------|
|      |                           |                                       | ED-15SF | ED-30SFT | EDU-18SF | EDU-36SFT |           |            |          |
| 1    | <a href="#">2158300</a>   | Hi-Limit Mounting Bracket             | 1       | 2        | 1        | 2         |           |            |          |
| 2    | <a href="#">2147600</a>   | Hi Limit 430 Degrees F                | 1       | 2        | 1        | 2         |           |            |          |
| 3    | <a href="#">G1155-1</a>   | Black PVC Grommet #315-463            | 1       | 2        | 1        | 2         |           |            |          |
| 4    | <a href="#">2160700</a>   | Bulb Clamp Top                        | 1       | 2        | 1        | 2         |           |            |          |
| 5    | <a href="#">2160899</a>   | Bulb Clamp Bottom Assembly            | 1       | 2        | 1        | 2         |           |            |          |
| 6    | <a href="#">CK2147500</a> | <b>Super Fryer Element 208V</b>       | 2       | 6        |          |           |           |            | C        |
|      | <a href="#">CK2147501</a> | <b>Super Fryer Element 220V</b>       | 3       | 6        |          |           |           |            | C        |
|      | <a href="#">CK2147502</a> | <b>Super Fryer Element 240V</b>       | 3       | 6        | 3        | 6         |           |            | C        |
|      | <a href="#">2147503</a>   | <b>Super Fryer Element 230V</b>       |         |          | 3        | 6         |           |            | C        |
| 7    | <a href="#">2158499</a>   | Termination Box Assembly              | 1       | 2        |          | 2         |           |            |          |
|      | <a href="#">2158497</a>   | Termination Box Assembly              |         |          | 1        |           |           |            |          |
| 8    | <a href="#">2158500</a>   | Termination Box Cover                 | 1       | 2        |          |           |           |            |          |
|      | <a href="#">2158501</a>   | Termination Box Cover <b>CE</b>       |         |          | 1        | 2         |           |            |          |
| 9    | <a href="#">2160499</a>   | Clamp Back Assembly                   | 1       | 2        | 1        | 2         |           |            |          |
| 10   | <a href="#">2160300</a>   | Rtd Clamp                             | 1       | 2        | 1        | 2         |           |            |          |
| 11   | <a href="#">2147000</a>   | <b>Rtd Sensor-Fryer</b>               | 1       | 2        | 1        | 2         |           |            | C        |
| 12   | <a href="#">2147400</a>   | Liquid-Tite Fitting #3444             | 1       | 2        | 1        | 2         |           |            |          |
| 13   | <a href="#">CK4601247</a> | <b>Switch Kit</b>                     |         |          | 1        | 2         |           |            | C        |
| 14   | <a href="#">2385400</a>   | Termination Box Support               | 1       | 2        | 1        | 2         |           |            |          |
| 15   | <a href="#">2157398</a>   | End Post Assembly                     | 2       | 4        | 2        | 4         |           |            |          |
| 16   | <a href="#">2384999</a>   | Main Top Assembly                     | 1       |          |          |           |           |            |          |
|      | <a href="#">2385199</a>   | Main Top Assembly                     |         | 1        |          |           |           |            |          |
|      | <a href="#">2384998</a>   | Main Top Assembly                     |         |          | 1        |           |           |            |          |
|      | <a href="#">2385198</a>   | Main Top Assembly                     |         |          |          | 1         |           |            |          |
| 17   | <a href="#">2157800</a>   | Rear Shield                           | 1       |          |          |           |           |            |          |
|      | <a href="#">2157801</a>   | Rear Shield                           |         | 1        |          |           |           |            |          |
|      | <a href="#">2157802</a>   | Rear Sheild                           |         |          | 1        |           |           |            |          |
|      | <a href="#">2157803</a>   | Rear Sheild                           |         |          |          | 1         |           |            |          |
| 18   | <a href="#">2160598</a>   | Element Lifting Handle                | 1       | 2        | 1        | 2         |           |            |          |
| 19   | <a href="#">F141</a>      | Clamp-Tube Tinnerman <b>Use GF141</b> | 2       | 4        | 2        | 4         |           |            |          |
| 20   | <a href="#">2158699</a>   | Element Clamp Assembly                | 1       | 2        | 1        | 2         |           |            |          |
| 21   | <a href="#">2176000</a>   | Inspection Cover                      | 1       | 1        | 1        | 1         |           |            |          |
| 22   | <a href="#">2157900</a>   | Contacto Box Cover                    | 1       |          |          |           |           |            |          |
|      | <a href="#">2157700</a>   | Contacto Box Cover                    |         | 1        |          |           |           |            |          |
|      | <a href="#">2157901</a>   | Contacto Box Cover                    |         |          | 1        |           |           |            |          |
|      | <a href="#">2157701</a>   | Contacto Box Cover                    |         |          |          | 1         |           |            |          |
| 23   | <a href="#">2158100</a>   | <b>Contacto Box</b>                   | 1       |          |          |           |           |            | C        |
|      | <a href="#">2158000</a>   | <b>Contacto Box</b>                   |         | 1        |          |           |           |            | C        |
|      | <a href="#">2158101</a>   | <b>Contacto Box</b>                   |         |          | 1        |           |           |            | C        |
|      | <a href="#">2158001</a>   | <b>Contacto Box</b>                   |         |          |          | 1         |           |            | C        |
| 24   | <a href="#">G01500-1</a>  | Ground Terminal 55AMP                 | 1       |          | 1        |           |           |            |          |
|      | <a href="#">G01499-1</a>  | Ground Terminal 105A Large SLU-70     |         | 1        |          | 1         |           |            |          |

\* NOT ILLUSTRATED

#### **RECOMMENDED STOCK PARTS**

# GARLAND PARTS IDENTIFICATION

## ED Super Fryers

### ED-15SF / ED-30SFT / EDU-18SF / EDU-36SFT

| ITEM | PART#                      | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                             | QTY     |          |          |           | FROM DATE | UP TO DATE | CRITICAL |
|------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----------|----------|-----------|-----------|------------|----------|
|      |                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ED-15SF | ED-30SFT | EDU-18SF | EDU-36SFT |           |            |          |
| 25   | <a href="#">2147300</a>    | Terminal Block 3 Circuit                                                                                                                                                                                                                                                                                                                                                                                                                                | 1       |          | 1        |           |           |            |          |
|      | <a href="#">G01268-1</a>   | Terminal Block #824 Export (No Longer Available. Use <a href="#">2694801</a> (4) or <a href="#">2694800</a> (5))                                                                                                                                                                                                                                                                                                                                        |         | 3        |          |           |           |            |          |
|      | <a href="#">G01268-1</a>   | Terminal Block #824 Export (No Longer Available. Use <a href="#">2694801</a> (4) or <a href="#">2694800</a> (5))                                                                                                                                                                                                                                                                                                                                        |         | 4        |          |           |           |            |          |
|      | <a href="#">G01268-2</a>   | Terminal Block End #830 (No Longer Available)                                                                                                                                                                                                                                                                                                                                                                                                           |         | 1        |          |           |           |            |          |
|      | <a href="#">G01280-3-7</a> | Terminal Block Channel 3 LUG Domestic                                                                                                                                                                                                                                                                                                                                                                                                                   |         | 1        |          |           |           |            |          |
|      | <a href="#">G01280-4-7</a> | Terminal Block Channel 4 LUG Export                                                                                                                                                                                                                                                                                                                                                                                                                     |         | 1        |          |           |           |            |          |
|      | <a href="#">2694800</a>    | Export Terminal Block (5)                                                                                                                                                                                                                                                                                                                                                                                                                               |         |          |          | 1         |           |            |          |
| 26   | <a href="#">4531014</a>    | <b>Contactor Replacement Kit (Field Service Kit)</b><br><b>Note:</b> <ul style="list-style-type: none"> <li>Kit includes a contactor (item 26A), wiring diagrams, install template, fasteners and install instructions.</li> <li>Implemented <b>FROM</b> (serial#) 1204100100912 (model) ED-15SF-0041 (date) 1-May-20012.</li> <li>Ref: original <a href="#">077062-1</a>(Contactor 3 Pole 208/240VAC Coil 30A), discontinued on 1-May-2012.</li> </ul> | 2       | 4        | 2        | 4         |           |            | C        |
| 26A  | <a href="#">1489701</a>    | <b>Contactor 3 Pole 208/240V 40A</b>                                                                                                                                                                                                                                                                                                                                                                                                                    | 2       | 4        | 2        | 4         | 1-MAY/12  |            | C        |
| 27   | <a href="#">2133599</a>    | <b>Fry-Tank Assembly</b>                                                                                                                                                                                                                                                                                                                                                                                                                                | 1       | 2        | 1        | 2         |           |            | C        |
| 28   | <a href="#">G02700-3</a>   | <b>Fryer Basket Twin R.H.</b>                                                                                                                                                                                                                                                                                                                                                                                                                           | 1       | 2        | 1        | 2         |           |            | C        |
|      | <a href="#">G02700-4</a>   | <b>Fryer Basket Twin L.H.</b>                                                                                                                                                                                                                                                                                                                                                                                                                           | 1       | 2        | 1        | 2         |           |            | C        |
|      | <a href="#">G02701-2</a>   | Fryer Basket Single (OPTIONAL)                                                                                                                                                                                                                                                                                                                                                                                                                          |         |          |          |           |           |            |          |
| 29   | <a href="#">2180699</a>    | Body Side Assembly LH Black (Code 9402CG0180)                                                                                                                                                                                                                                                                                                                                                                                                           | 1       | 1        | 1        | 1         |           |            |          |
|      | <a href="#">2180698</a>    | Body Side Assembly LH S/S (Code 9402CG0180)                                                                                                                                                                                                                                                                                                                                                                                                             | 1       | 1        | 1        | 1         |           |            |          |
|      | <a href="#">2180599</a>    | Side Assembly RH (Code 9402CG0180)                                                                                                                                                                                                                                                                                                                                                                                                                      | 1       | 1        | 1        | 1         |           |            |          |
|      | <a href="#">2180598</a>    | Side - Right Assembly S/S (Code 9402CG0180)                                                                                                                                                                                                                                                                                                                                                                                                             | 1       | 1        | 1        | 1         |           |            |          |
|      | <a href="#">2349499</a>    | Body Side Assembly RH (Code 9402CG0181)                                                                                                                                                                                                                                                                                                                                                                                                                 | 1       | 1        | 1        | 1         |           |            |          |
|      | <a href="#">2349498</a>    | Body Side Assembly LH (Code 9402CG0181)                                                                                                                                                                                                                                                                                                                                                                                                                 | 1       | 1        | 1        | 1         |           |            |          |
|      | <a href="#">2349497</a>    | Body Side Assembly RH (Code 9402CG0181)                                                                                                                                                                                                                                                                                                                                                                                                                 | 1       | 1        | 1        | 1         |           |            |          |
|      | <a href="#">2349496</a>    | Body Side Assembly LH (Code 9402CG0181)                                                                                                                                                                                                                                                                                                                                                                                                                 | 1       | 1        | 1        | 1         |           |            |          |
| 30   | <a href="#">2180899</a>    | Body Back & Bottom Assy (15F)                                                                                                                                                                                                                                                                                                                                                                                                                           | 1       |          |          |           |           |            |          |
|      | <a href="#">2180898</a>    | Body Back & Bottom S/S                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1       |          |          |           |           |            |          |
|      | <a href="#">2181399</a>    | Body Back & Bottom Assy (30FT)                                                                                                                                                                                                                                                                                                                                                                                                                          |         | 1        |          |           |           |            |          |
|      | <a href="#">2181398</a>    | Body Back & Bottom S/S                                                                                                                                                                                                                                                                                                                                                                                                                                  |         | 1        |          |           |           |            |          |
|      | <a href="#">2180897</a>    | Body Back & Bottom Assy. 18" W.C.                                                                                                                                                                                                                                                                                                                                                                                                                       |         |          | 1        |           |           |            |          |
|      | <a href="#">2180896</a>    | Body Back & Bottom Assy S/S                                                                                                                                                                                                                                                                                                                                                                                                                             |         |          | 1        |           |           |            |          |
|      | <a href="#">2181397</a>    | Back & Bottom Assembly W.C.                                                                                                                                                                                                                                                                                                                                                                                                                             |         |          |          | 1         |           |            |          |
|      | <a href="#">2181396</a>    | Back & Bottom Assembly S/S                                                                                                                                                                                                                                                                                                                                                                                                                              |         |          |          | 1         |           |            |          |
| 31   | <a href="#">2351900</a>    | Control Shield                                                                                                                                                                                                                                                                                                                                                                                                                                          | 1       |          |          |           |           |            |          |
|      | <a href="#">2352500</a>    | Control Shield                                                                                                                                                                                                                                                                                                                                                                                                                                          |         | 1        |          |           |           |            |          |
|      | <a href="#">2351902</a>    | Control Sheild                                                                                                                                                                                                                                                                                                                                                                                                                                          |         |          | 1        |           |           |            |          |
|      | <a href="#">2352502</a>    | Control Sheild                                                                                                                                                                                                                                                                                                                                                                                                                                          |         |          |          | 1         |           |            |          |
| 32   | <a href="#">2149400</a>    | Door Hinge Right Hand                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1       | 1        | 1        | 1         |           |            |          |
|      | <a href="#">2149401</a>    | Door Hinge Left Hand                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1       | 1        | 1        | 1         |           |            |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

# GARLAND PARTS IDENTIFICATION

## ED Super Fryers

### ED-15SF / ED-30SFT / EDU-18SF / EDU-36SFT

| ITEM | PART#     | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                         | QTY     |          |          |           | FROM DATE | UP TO DATE | CRITICAL |
|------|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----------|----------|-----------|-----------|------------|----------|
|      |           |                                                                                                                                                                                                                                                                                                                                                                                                                                     | ED-15SF | ED-30SFT | EDU-18SF | EDU-36SFT |           |            |          |
| 33A  | 2349500   | Control Panel                                                                                                                                                                                                                                                                                                                                                                                                                       | 1       |          |          |           |           | 9-APR/12   |          |
|      | 2350000   | Control Panel                                                                                                                                                                                                                                                                                                                                                                                                                       |         | 1        |          |           |           | 9-APR/12   |          |
|      | 2349501   | Control Panel                                                                                                                                                                                                                                                                                                                                                                                                                       |         |          | 1        |           |           | 9-APR/12   |          |
|      | 2350001   | Control Panel                                                                                                                                                                                                                                                                                                                                                                                                                       |         |          |          | 1         |           |            |          |
| 33B  | 4530539   | Control Panel ED-15F/15SF (Backward Compatible)                                                                                                                                                                                                                                                                                                                                                                                     | 1       |          |          |           | 9-APR/12  |            |          |
|      | 4530541   | Control Panel ED-30F/30SF (Backward Compatible)                                                                                                                                                                                                                                                                                                                                                                                     |         | 1        |          |           | 9-APR/12  |            |          |
|      | 4530540   | Control Panel EDU-18F/18SF (Backward Compatible)                                                                                                                                                                                                                                                                                                                                                                                    |         |          | 1        |           | 9-APR/12  |            |          |
| 34   | 2138900   | Dial Insert F/ED-15F,30F (F) 200-375                                                                                                                                                                                                                                                                                                                                                                                                | 1       | 2        | 1        | 2         |           |            |          |
|      | 2138901   | Dial Insert F/ED-15FE,30FE (C) 95-192                                                                                                                                                                                                                                                                                                                                                                                               | 1       | 2        | 1        | 2         |           |            |          |
| 35A  | F561      | 10-32 - 3/16 Socket Head Screw                                                                                                                                                                                                                                                                                                                                                                                                      | 1       | 2        | 1        | 2         |           |            |          |
| 35B  | 3043207   | Knob Hub<br><b>Note: NOT interchangeable with items 35C / 35D.</b>                                                                                                                                                                                                                                                                                                                                                                  | 1       | 2        | 1        | 2         |           | 27-JAN/10  |          |
| 35C  | 3043208   | Hub 1/4" Not Flat<br><b>Note:</b><br><ul style="list-style-type: none"> <li>Used <b>FROM</b> (serial#)1001100100982 (model) ED-15F-0008 <b>UP TO</b> (serial#)1204100100470 (model) ED-30FT-0045.</li> <li><b>NOT interchangeable with items 35B / 35D.</b></li> </ul>                                                                                                                                                              | 1       | 2        | 1        | 2         | 27-JAN/10 | 9-APR/12   |          |
| 35D  | 3043200   | Hub (non-FF)<br><b>Note: NOT interchangeable with items 35B / 35C.</b>                                                                                                                                                                                                                                                                                                                                                              | 1       | 2        | 1        |           | 9-APR/12  |            |          |
| 35E  | 3043300   | Retaining Spring                                                                                                                                                                                                                                                                                                                                                                                                                    | 1       | 2        | 1        | 2         |           |            |          |
| 35F  | 3043100   | Knob                                                                                                                                                                                                                                                                                                                                                                                                                                | 1       | 2        | 1        | 2         |           |            |          |
| 35G  | 4512224   | Dial Kit (Includes items: 35A, 35B, 35E, 35F)                                                                                                                                                                                                                                                                                                                                                                                       | 1       | 2        | 1        | 2         |           | 27-JAN/10  |          |
| 35H  | 4527733   | ED-Fryer Knob Assembly<br><b>Note:</b><br><ul style="list-style-type: none"> <li>Includes a Knob (3043100) and a spacer.</li> <li>Can install this knob asm on an older unit with Hub 3043208 (35C) and Limiter Plate 4527806 (item 42B). See illustration for related components.</li> <li>Implemented <b>FROM</b> (serial#)1001100100982 (model) ED-15F-0008 <b>UP TO</b> (serial#)1204100100470 (model) ED-30FT-0045.</li> </ul> | 1       | 2        | 1        | 2         | 27-JAN/10 | 9-APR/12   |          |
| 36   | 2146800   | Illuminated Power Switch                                                                                                                                                                                                                                                                                                                                                                                                            | 1       | 2        | 1        | 2         |           |            |          |
| 37   | 3011400   | PVC Clear Cap c/w Black Bezel                                                                                                                                                                                                                                                                                                                                                                                                       |         |          | 1        | 2         |           |            |          |
| 38   | 2385500   | Back Splash                                                                                                                                                                                                                                                                                                                                                                                                                         | 1       |          |          |           |           |            |          |
|      | 2385600   | Back Splash                                                                                                                                                                                                                                                                                                                                                                                                                         |         | 1        |          |           |           |            |          |
|      | 2385501   | Back Splash                                                                                                                                                                                                                                                                                                                                                                                                                         |         |          | 1        |           |           |            |          |
|      | 2385601   | Back Splash 36"                                                                                                                                                                                                                                                                                                                                                                                                                     |         |          |          | 1         |           |            |          |
| 39   | 2138500   | <b>Amber Indicator Light (Obsolete, use CK4533018)</b>                                                                                                                                                                                                                                                                                                                                                                              | 1       | 2        | 1        | 2         |           | 30-APR-16  | C        |
|      | CK4533018 | <b>Service Kit for Indicator Light 250V Amber</b><br>Notes: Kit includes green rectangular 250V light 4533018 and amber rectangular lens 4533017.                                                                                                                                                                                                                                                                                   | 1       | 2        | 1        | 2         | 1-MAY-16  |            | C        |

\* NOT ILLUSTRATED

#### RECOMMENDED STOCK PARTS

# GARLAND PARTS IDENTIFICATION

## ED Super Fryers

### ED-15SF / ED-30SFT / EDU-18SF / EDU-36SFT

| ITEM | PART#                                                                                                                                                                                                                                                                                                                                                  | DESCRIPTION                                                                                                                                                                       | QTY     |          |          |           | FROM DATE | UP TO DATE           | CRITICAL |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----------|----------|-----------|-----------|----------------------|----------|
|      |                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                   | ED-15SF | ED-30SFT | EDU-18SF | EDU-36SFT |           |                      |          |
| 40   | <a href="#">2149299</a>                                                                                                                                                                                                                                                                                                                                | Door Assembly 15"                                                                                                                                                                 | 1       |          |          |           |           |                      |          |
|      | <a href="#">2149296</a>                                                                                                                                                                                                                                                                                                                                | Door Assembly 30"                                                                                                                                                                 |         | 1        |          |           |           |                      |          |
|      | <a href="#">2149298</a>                                                                                                                                                                                                                                                                                                                                | Door Assembly 18"                                                                                                                                                                 |         |          | 1        |           |           |                      |          |
|      | <a href="#">2149295</a>                                                                                                                                                                                                                                                                                                                                | Door Assembly 36"                                                                                                                                                                 |         |          |          | 1         |           |                      |          |
| 41   | 2149300                                                                                                                                                                                                                                                                                                                                                | Door Pull                                                                                                                                                                         | 1       | 1        | 1        | 1         |           |                      |          |
| 42A  | <a href="#">2491500</a>                                                                                                                                                                                                                                                                                                                                | Stop Plate Assembly                                                                                                                                                               | 1       | 2        | 1        | 2         |           | 27-JAN/10            |          |
| 42B  | <a href="#">4527806</a>                                                                                                                                                                                                                                                                                                                                | Mechanical Limiter Plate ED-Fryers                                                                                                                                                | 1       | 2        | 1        | 2         | 28-JAN/10 | 9-APR/12             |          |
| 43   | <a href="#">2159300</a>                                                                                                                                                                                                                                                                                                                                | Insulator-Thermostat                                                                                                                                                              | 1       | 2        | 1        | 2         |           | 27-JAN/10            |          |
| 44A  | <a href="#">2142000</a>                                                                                                                                                                                                                                                                                                                                | <b>Electronic Thermostat 200-375F</b><br><b>Note:</b> Part is <b>No Longer Available</b> . Use Conversion Kit (item# 44B).                                                        | 1       | 2        | 1        | 2         | NLA       | 27-JAN/10            | C        |
| 44B  | <a href="#">4531019</a>                                                                                                                                                                                                                                                                                                                                | Tstat Kit - ED15 F/SF                                                                                                                                                             | 1       |          |          |           |           | 9-APR/12<br>see Note |          |
|      | <a href="#">4531020</a>                                                                                                                                                                                                                                                                                                                                | Tstat Kit - ED30 FT/SFT                                                                                                                                                           |         | 1        |          |           |           | 9-APR/12<br>see Note |          |
|      | <a href="#">4531021</a>                                                                                                                                                                                                                                                                                                                                | Tstat Kit - EDU18 F/SF                                                                                                                                                            |         |          | 1        |           |           | 9-APR/12<br>see Note |          |
|      | <b>Note:</b> <ul style="list-style-type: none"> <li>Kit includes components as shown in illustration and install instructions (4531018).</li> <li>Use one of these Kits for any unit built UP TO 9-Apr-2012.</li> <li>Components in these Kits are used in units built FROM (serial#) 1204100100470 (model) ED-30FT-0045 (date) 9-Apr-2012.</li> </ul> |                                                                                                                                                                                   |         |          |          |           |           |                      |          |
| 45   | <a href="#">4527081</a>                                                                                                                                                                                                                                                                                                                                | <b>Electronic Thermostat</b><br><b>Note:</b><br>For any unit built between 28-Jan/2010 and 9-Apr/2012, please refer to Bulletin GAR-03-13-AIC for thermostat replacement options. | 1       | 2        | 1        | 2         | 28-JAN/10 |                      | C        |
| 46A  | <a href="#">2358200</a>                                                                                                                                                                                                                                                                                                                                | Shaft Seal N9030 x 1/4                                                                                                                                                            | 1       | 2        | 1        | 2         |           | 27-JAN/10            |          |
| 46B  | <a href="#">2382800</a>                                                                                                                                                                                                                                                                                                                                | Shaft Retaining Spring                                                                                                                                                            | 1       | 2        | 1        | 2         |           | 27-JAN/10            |          |
| 46C  | <a href="#">2167300</a>                                                                                                                                                                                                                                                                                                                                | Panel Bearing Assembly                                                                                                                                                            | 1       | 2        | 1        | 2         |           | 27-JAN/10            |          |
| 46D  | <a href="#">2167000</a>                                                                                                                                                                                                                                                                                                                                | Spring Tension Pin                                                                                                                                                                | 1       | 2        | 1        | 2         |           | 27-JAN/10            |          |
| 46E  | <a href="#">2166800</a>                                                                                                                                                                                                                                                                                                                                | Potentiometer Shaft                                                                                                                                                               | 1       | 2        | 1        | 2         |           | 27-JAN/10            |          |
| 46F  | <a href="#">2167100</a>                                                                                                                                                                                                                                                                                                                                | Bowed Spring Washer                                                                                                                                                               | 1       | 2        | 1        | 2         |           | 27-JAN/10            |          |
| 46G  | <a href="#">2167200</a>                                                                                                                                                                                                                                                                                                                                | Retaining Ring                                                                                                                                                                    | 1       | 2        | 1        | 2         |           | 27-JAN/10            |          |
| 47   | 4530531                                                                                                                                                                                                                                                                                                                                                | 0.437 O-Ring                                                                                                                                                                      | 1       | 1        | 1        |           | 9-APR/12  |                      |          |
| 48A  | F648                                                                                                                                                                                                                                                                                                                                                   | #10 - 32 x 3/8 Set Screw                                                                                                                                                          | 1       | 1        | 1        |           | 9-APR/12  |                      |          |
| 48B  | 4530532                                                                                                                                                                                                                                                                                                                                                | Tstat Shaft Extension                                                                                                                                                             | 1       | 1        | 1        |           | 9-APR/12  |                      |          |
| 48C  | 4530537                                                                                                                                                                                                                                                                                                                                                | Fryer Control Stop                                                                                                                                                                | 1       | 1        | 1        |           | 9-APR/12  |                      |          |
| 48D  | F646                                                                                                                                                                                                                                                                                                                                                   | #6 - 32 x 0.437 Standoff                                                                                                                                                          | 2       | 2        | 2        |           | 9-APR/12  |                      |          |
| 48E  | <a href="#">4530538</a>                                                                                                                                                                                                                                                                                                                                | Fryer Control Plate                                                                                                                                                               | 1       | 1        | 1        |           | 9-APR/12  |                      |          |
| 48F  | F647                                                                                                                                                                                                                                                                                                                                                   | Extension Retaining Ring 0.437                                                                                                                                                    | 1       | 1        | 1        |           | 9-APR/12  |                      |          |
| 52   | <a href="#">078174-1</a>                                                                                                                                                                                                                                                                                                                               | <b>Magnetic Door Catch</b>                                                                                                                                                        | 1       | 1        | 1        | 1         |           |                      | C        |
| 53   | 2139600                                                                                                                                                                                                                                                                                                                                                | Magnet Mounting Bracket                                                                                                                                                           | 1       | 1        | 1        | 1         |           | 5-MAY/91             |          |
|      | <a href="#">2183500</a>                                                                                                                                                                                                                                                                                                                                | Magnet Bracket                                                                                                                                                                    | 1       | 1        | 1        | 1         | 5-MAY/91  |                      |          |
| 54   | <a href="#">1028500</a>                                                                                                                                                                                                                                                                                                                                | Connector 3/8" 90 deg. Romex                                                                                                                                                      | 1       | 2        | 1        | 2         |           |                      |          |
| 55   | <a href="#">1029600</a>                                                                                                                                                                                                                                                                                                                                | Antishorts #1                                                                                                                                                                     | 2       | 4        | 2        | 4         |           |                      |          |

\* NOT ILLUSTRATED

#### RECOMMENDED STOCK PARTS

# GARLAND PARTS IDENTIFICATION

## ED Super Fryers


### ED-15SF / ED-30SFT / EDU-18SF / EDU-36SFT

| ITEM | PART#                     | DESCRIPTION                             | QTY         |          |          |           | FROM DATE | UP TO DATE | CRITICAL |
|------|---------------------------|-----------------------------------------|-------------|----------|----------|-----------|-----------|------------|----------|
|      |                           |                                         | ED-15SF     | ED-30SFT | EDU-18SF | EDU-36SFT |           |            |          |
| 56   | <a href="#">G01497-1</a>  | Bx Connector Straight 3/8".             | 1           | 2        | 1        | 2         |           |            |          |
| 57A  | <a href="#">F157</a>      | Levelling Bolt 3/8-16 x 1-1/16"         | 4           | 4        | 4        | 4         |           |            |          |
| 57B  | <a href="#">078109-2</a>  | Metal Leg (Optional)                    | 4           | 4        | 4        | 4         |           |            |          |
| 57C* | <a href="#">G01503-10</a> | Leg Weld Nut                            | 4           | 4        | 4        | 4         |           |            |          |
| 58   | <a href="#">2169200</a>   | Panel Control Wire F/ED 15F,30F         | 1           | 2        | 1        | 2         |           |            |          |
| 59   | <a href="#">2169100</a>   | Contactors Control Wire F/ED-15F        | 1           |          |          |           |           |            |          |
|      | 2170500                   | Contactors Control Wire F/ED-30F        |             | 1        |          |           |           |            |          |
|      | 2169101                   | Control Wires - Contactor               |             |          | 1        |           |           |            |          |
|      | 2170501                   | Control Wires - Contactor               |             |          |          | 1         |           |            |          |
| 60   | <a href="#">2168800</a>   | Contactors Jumper F/ED-15F,30F Export   | 1           | 2        | 1        |           |           |            |          |
|      | <a href="#">2168801</a>   | Contactors Jumper                       |             |          |          | 2         |           |            |          |
|      | 2170000                   | Contactors Jumper F/ED-30F Domestic     |             | 1        |          |           |           |            |          |
| 61   | <a href="#">2168700</a>   | Contactors Wire F/ED-15F Domestic       | 1           |          |          |           |           |            |          |
|      | <a href="#">2168701</a>   | Contactors Wire F/ED-15F Export         | 1           |          | 1        |           |           |            |          |
|      | 2169900                   | Contactors Wire F/ED-30F Domestic       |             | 1        |          |           |           |            |          |
|      | 2169901                   | Contactors Wires F/ED-30F Export        |             | 1        |          | 1         |           |            |          |
| 62   | 2168900                   | Left End Post Wire F/ED-15F Dom.        | 1           |          |          |           |           |            |          |
|      | 2168901                   | Left End Post Wire F/ED-15F Export      | 1           |          |          |           |           |            |          |
|      | 2168902                   | Left End Post Wires Harness             |             |          | 1        |           |           |            |          |
|      | 2169000                   | Right End Post Wire F/ED-15F Domestic   | 1           |          |          |           |           |            |          |
|      | 2169001                   | Right End Post Wire F/ED-15F Export     | 1           |          | 1        |           |           |            |          |
|      | 2170100                   | LF Left End Post Wire F/ED-30F Domestic |             | 1        |          |           |           |            |          |
|      | 2170101                   | LF Left End Post Wire EXPED30F Export   |             | 1        |          |           |           |            |          |
|      | 2170102                   | L.F. Left End Post Wires Harness        |             |          |          | 1         |           |            |          |
|      | 2170200                   | LF Right End Post Wire F/ED30F Domestic |             | 1        |          |           |           |            |          |
|      | 2170201                   | LF Right End Post Wire F/ED30F Export   |             | 1        |          | 1         |           |            |          |
|      | 2170300                   | RF Left End Post Wire F/ED-30F Domestic |             | 1        |          |           |           |            |          |
|      | 2170301                   | RF Left End Post Wire F/ED-30F Export   |             | 1        |          |           |           |            |          |
|      | 2170302                   | R.F. Left End Post Wires Harness        |             |          |          | 1         |           |            |          |
|      | 2170400                   | RF Right End Post Wire F/ED30F Domestic |             | 1        |          |           |           |            |          |
| 63   | <a href="#">G01296-1</a>  | <b>Pilot Red 240V</b>                   |             |          | 1        | 1         |           |            | C        |
| 64   | <a href="#">4529725</a>   | Garland Nameplate 4 7/8"                | 1           | 1        | 1        | 1         |           |            |          |
| 65   | <a href="#">2285999</a>   | Leg Channel Assembly 15"                | 2           |          |          |           |           |            |          |
|      | <a href="#">2285998</a>   | Leg Channel Assembly 18"                |             |          | 2        |           |           |            |          |
|      | <a href="#">2285996</a>   | Leg Channel Assembly 30"                |             | 2        |          |           |           |            |          |
|      | <a href="#">2285995</a>   | Leg Channel Assembly 36"                |             |          |          | 2         |           |            |          |
| 80*  | 2145700                   | Wiring Diagram                          | ED-15SF-DOM |          |          |           |           |            |          |
|      | 2145800                   | Wiring Diagram                          | ED-15SF-EXP |          |          |           |           |            |          |
| 81*  | 2145900                   | Wiring Diagram                          | ED-30SF-DOM |          |          |           |           |            |          |
|      | 2144600                   | Wiring Diagram                          | ED-30SF-EXP |          |          |           |           |            |          |
| 82*  | 2145801                   | Wiring Diagram                          | EDU-18SF    |          |          |           |           |            |          |
| 83*  | 2146001                   | Wiring Diagram                          | EDU-36SF    |          |          |           |           |            |          |


\* NOT ILLUSTRATED

#### **RECOMMENDED STOCK PARTS**


Blank Page

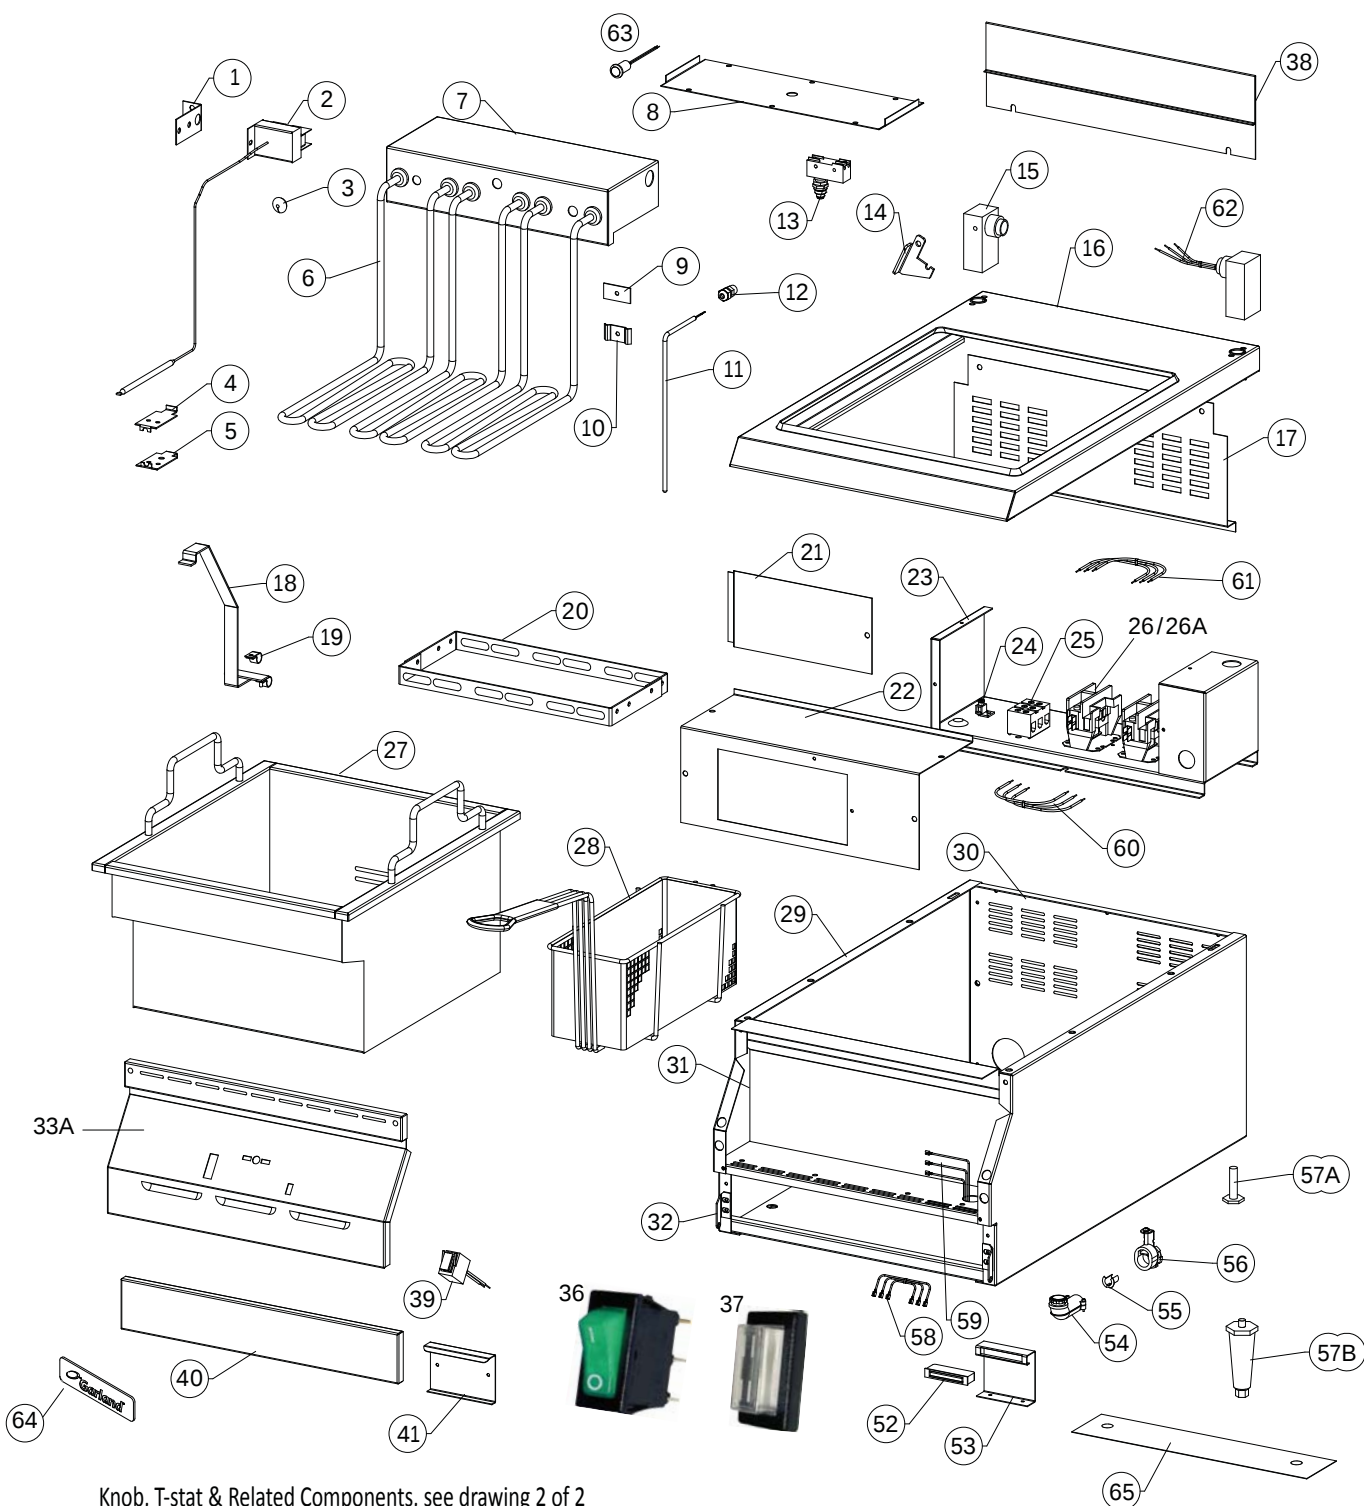


Knob, T-stat & Related Components, see drawing 2 of 2

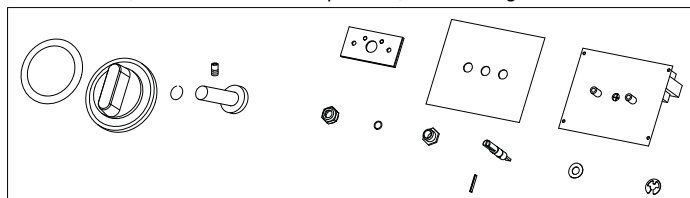


80 - 83 (Wiring Diagrams)



T-stat & Related Components for Units Built UP TO 27-Jan/2010

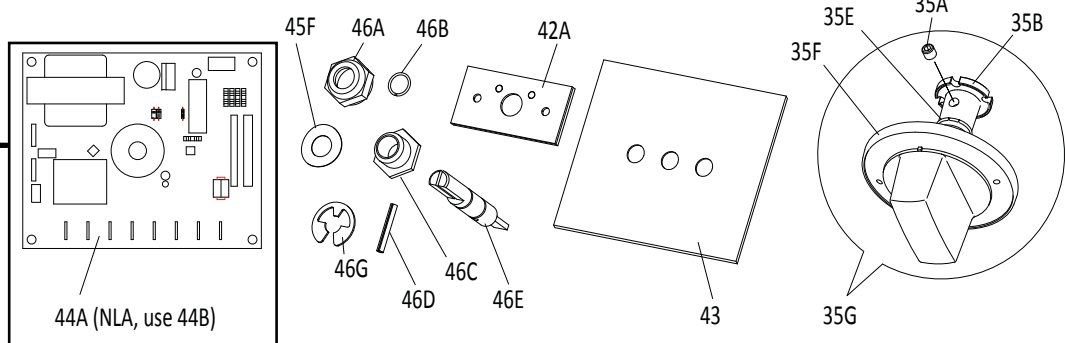

T-Stat & Related Components for Units Built  
BETWEEN 28-Jan/2010 and 9-Apr/2012

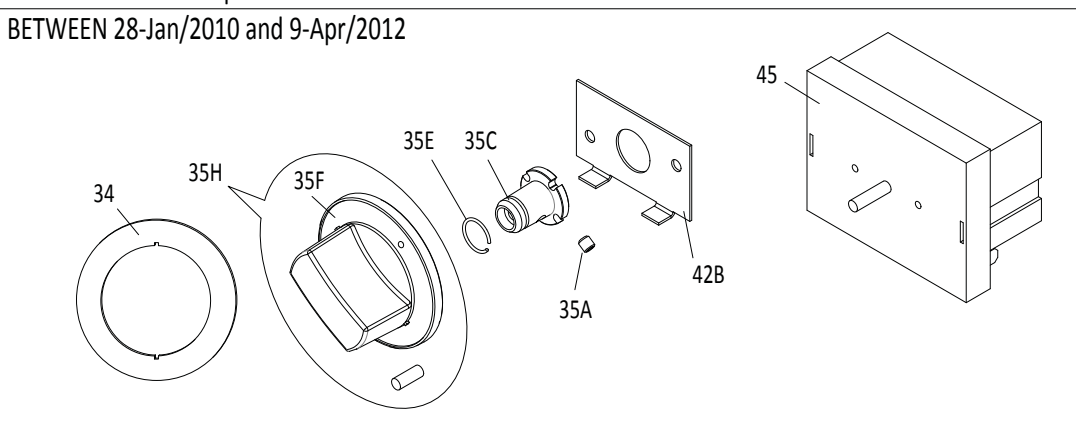


**44B T-Stat Kit**

Illustration shows T-stat & Related Components for Units Built

FROM:

(date) 9-Apr/2012

(serial#) 1204100100470

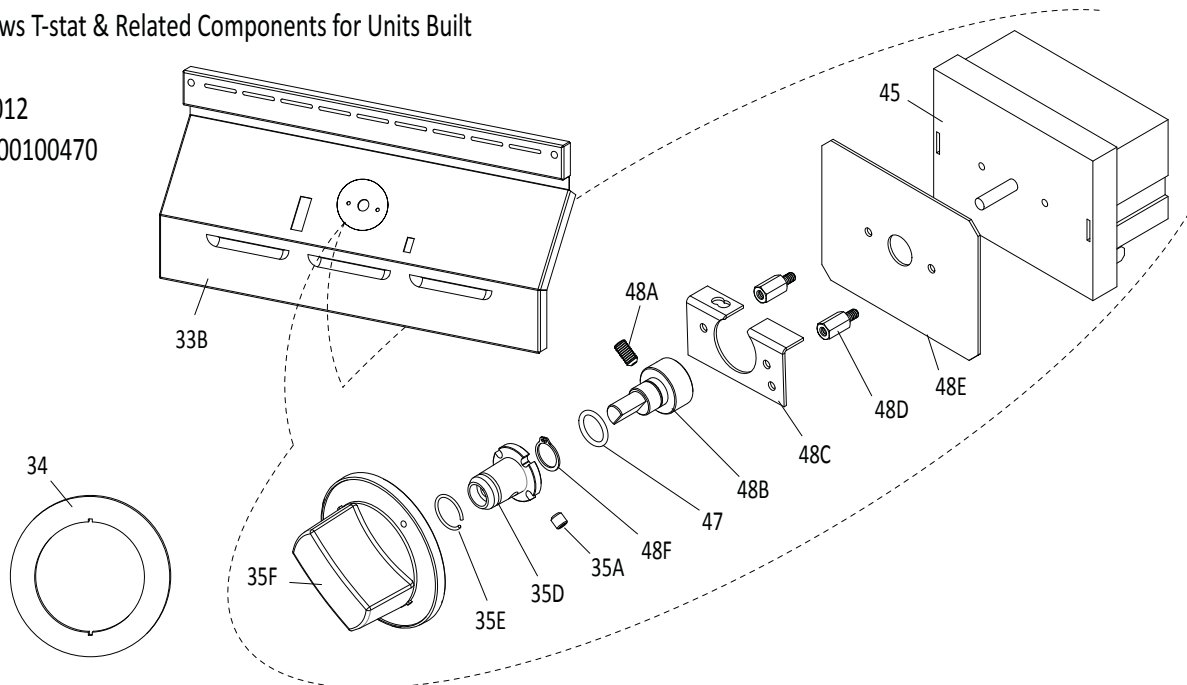

# GARLAND PARTS IDENTIFICATION

## ED Fryers

### ED-15F / ED-30FT / EDU-18F / EDU-36FT

| ITEM | PART#                     | DESCRIPTION                                                                                                                                                                       | QTY    |         |         |          | FROM DATE | UP TO DATE | CRITICAL |
|------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------|---------|----------|-----------|------------|----------|
|      |                           |                                                                                                                                                                                   | ED-15F | ED-30FT | EDU-18F | EDU-36FT |           |            |          |
| 1    | <a href="#">2158300</a>   | Hi-Limit Mounting Bracket                                                                                                                                                         | 1      | 2       | 1       | 2        |           |            |          |
| 2    | <a href="#">2147600</a>   | Hi Limit 430 Degrees F                                                                                                                                                            | 1      | 2       | 1       | 2        |           |            |          |
| 3    | <a href="#">G1155-1</a>   | Black PVC Grommet #315-463                                                                                                                                                        | 1      | 2       | 1       | 2        |           |            |          |
| 4    | <a href="#">2160700</a>   | Bulb Clamp Top                                                                                                                                                                    | 1      | 2       | 1       | 2        |           |            |          |
| 5    | <a href="#">2160899</a>   | Bulb Clamp Bottom Assembly                                                                                                                                                        | 1      | 2       | 1       | 2        |           |            |          |
| 6    | <a href="#">CK2185500</a> | <b>Super Fryer Element 208V 5.3kW</b>                                                                                                                                             | 1      | 2       | 1       | 2        |           |            | C        |
|      | <a href="#">CK2185501</a> | <b>Super Fryer Element 220V 5.929kW</b>                                                                                                                                           | 1      | 2       | 1       | 2        |           |            | C        |
|      | <a href="#">CK2185502</a> | <b>Super Fryer Element 240V 5.3kW</b>                                                                                                                                             | 1      | 2       | 1       | 2        |           |            | C        |
|      | <a href="#">2185503</a>   | <b>Super Fryer Element 230V 5.3 kW</b><br><b>Important:</b> Use Part <a href="#">2185502</a> Fryer Element 240V 5.3kW to replace Part <a href="#">2185503</a> Fryer Element 230V. |        |         | 1       | 2        |           |            | C        |
| 7    | <a href="#">2158498</a>   | Termination Box Assembly                                                                                                                                                          | 1      | 2       |         |          |           |            |          |
|      | <a href="#">2158496</a>   | Termination Box Assembly                                                                                                                                                          |        |         | 1       | 2        |           |            |          |
| 8    | <a href="#">2158500</a>   | Termination Box Cover                                                                                                                                                             | 1      | 2       |         |          |           |            |          |
|      | <a href="#">2158501</a>   | Termination Box Cover <b>CE</b> .                                                                                                                                                 |        |         | 1       | 2        |           |            |          |
| 9    | <a href="#">2160499</a>   | Clamp Back Assembly                                                                                                                                                               | 1      | 2       | 1       | 2        |           |            |          |
| 10   | <a href="#">2160300</a>   | Rtd Clamp                                                                                                                                                                         | 1      | 2       | 1       | 2        |           |            |          |
| 11   | <a href="#">2147000</a>   | <b>Rtd Sensor-Fryer</b>                                                                                                                                                           | 1      | 2       | 1       | 2        |           |            | C        |
| 12   | <a href="#">2147400</a>   | Liquid-Tite Fitting #3444                                                                                                                                                         | 1      | 2       | 1       | 2        |           |            |          |
| 13   | <a href="#">CK4601247</a> | <b>Switch W/Sealing Cap X01-E1G6</b>                                                                                                                                              |        |         | 1       | 2        |           |            | C        |
| 14   | <a href="#">2385400</a>   | Termination Box Support                                                                                                                                                           | 1      | 2       | 1       | 2        |           |            |          |
| 15   | <a href="#">2157398</a>   | End Post Assembly                                                                                                                                                                 | 2      | 4       | 2       | 4        |           |            |          |
| 16   | <a href="#">2384999</a>   | Main Top Assy                                                                                                                                                                     | 1      |         |         |          |           |            |          |
|      | <a href="#">2385199</a>   | Main Top Assy                                                                                                                                                                     |        | 1       |         |          |           |            |          |
|      | <a href="#">2384998</a>   | Main Top Assembly                                                                                                                                                                 |        |         | 1       |          |           |            |          |
|      | <a href="#">2385198</a>   | Main Top Assembly                                                                                                                                                                 |        |         |         | 1        |           |            |          |
| 17   | <a href="#">2157800</a>   | Rear Shield                                                                                                                                                                       | 1      |         |         |          |           |            |          |
|      | <a href="#">2157801</a>   | Rear Shield                                                                                                                                                                       |        | 1       |         |          |           |            |          |
|      | <a href="#">2157802</a>   | Rear Sheild                                                                                                                                                                       |        |         | 1       |          |           |            |          |
|      | <a href="#">2157803</a>   | Rear Sheild                                                                                                                                                                       |        |         |         | 1        |           |            |          |
| 18   | <a href="#">2160598</a>   | Element Lifting Handle                                                                                                                                                            | 1      | 2       | 1       | 2        |           |            |          |
| 19   | <a href="#">F141</a>      | Clamp-Tube Tinnerman <b>Use GF141</b>                                                                                                                                             | 2      | 4       | 2       | 4        |           |            |          |
| 20   | <a href="#">2158699</a>   | Element Clamp Assembly                                                                                                                                                            | 1      | 2       | 1       | 2        |           |            |          |
| 21   | <a href="#">2176000</a>   | Inspection Cover                                                                                                                                                                  | 1      | 1       | 1       | 1        |           |            |          |
| 22   | <a href="#">2157900</a>   | Contacto Box Cover                                                                                                                                                                | 1      |         |         |          |           |            |          |
|      | <a href="#">2157700</a>   | Contacto Box Cover                                                                                                                                                                |        | 1       |         |          |           |            |          |
|      | <a href="#">2157901</a>   | Contacto Box Cover                                                                                                                                                                |        |         | 1       |          |           |            |          |
|      | <a href="#">2157701</a>   | Contacto Box Cover                                                                                                                                                                |        |         |         | 1        |           |            |          |
| 23   | <a href="#">2158100</a>   | <b>Contacto Box</b>                                                                                                                                                               | 1      |         |         |          |           |            | C        |
|      | <a href="#">2158000</a>   | <b>Contacto Box</b>                                                                                                                                                               |        | 1       |         |          |           |            | C        |
|      | <a href="#">2158101</a>   | <b>Contacto Box</b>                                                                                                                                                               |        |         | 1       |          |           |            | C        |
|      | <a href="#">2158001</a>   | <b>Contacto Box</b>                                                                                                                                                               |        |         |         | 1        |           |            | C        |
| 24   | <a href="#">G01500-1</a>  | Ground Terminal 55AMP                                                                                                                                                             | 1      |         | 1       |          |           |            |          |
|      | <a href="#">G01499-1</a>  | Ground Terminal 105A Large SLU-70                                                                                                                                                 |        | 1       |         | 1        |           |            |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

# GARLAND PARTS IDENTIFICATION

## ED Fryers

### ED-15F / ED-30FT / EDU-18F / EDU-36FT

| ITEM | PART#                      | DESCRIPTION                                                                                                      | QTY    |         |         |          | FROM DATE | UP TO DATE | CRITICAL |
|------|----------------------------|------------------------------------------------------------------------------------------------------------------|--------|---------|---------|----------|-----------|------------|----------|
|      |                            |                                                                                                                  | ED-15F | ED-30FT | EDU-18F | EDU-36FT |           |            |          |
| 25   | <a href="#">2147300</a>    | Terminal Block 3 Circuit                                                                                         | 1      |         | 1       |          |           |            |          |
|      | <a href="#">G01268-1</a>   | Terminal Block #824 Export (No Longer Available. Use <a href="#">2694801</a> (4) or <a href="#">2694800</a> (5)) |        | 3       |         |          |           |            |          |
|      | <a href="#">G01268-1</a>   | Terminal Block #824 Export (No Longer Available. Use <a href="#">2694801</a> (4) or <a href="#">2694800</a> (5)) |        | 4       |         |          |           |            |          |
|      | <a href="#">G01268-2</a>   | Terminal Block End #830 (No Longer Available)                                                                    |        | 1       |         |          |           |            |          |
|      | <a href="#">G01280-3-7</a> | Terminal Block Channel 3 LUG Domestic                                                                            |        | 1       |         |          |           |            |          |
|      | <a href="#">G01280-4-7</a> | Terminal Block Channel 4 LUG Export                                                                              |        | 1       |         |          |           |            |          |
|      | <a href="#">2694800</a>    | Export Terminal Block (5)                                                                                        |        |         |         | 1        |           |            |          |
| 26   | <b>2186900</b>             | <b>Contactor Single Pole</b>                                                                                     | 2      | 4       | 2       | 4        |           |            | C        |
| 27   | <a href="#">2133599</a>    | <b>Fry-Tank Assembly</b>                                                                                         | 1      | 2       | 1       | 2        |           |            | C        |
| 28   | <a href="#">G02700-3</a>   | <b>Fryer Basket Twin R.H.</b>                                                                                    | 1      | 2       | 1       | 2        |           |            | C        |
|      | <a href="#">G02700-4</a>   | <b>Fryer Basket Twin L.H.</b>                                                                                    | 1      | 2       | 1       | 2        |           |            | C        |
|      | <a href="#">G02701-2</a>   | Fryer Basket Single (OPTIONAL)                                                                                   |        |         |         |          |           |            |          |
| 29   | <a href="#">2180699</a>    | Body Side Assembly LH Black (Code 9402CG0180)                                                                    | 1      | 1       | 1       | 1        |           |            |          |
|      | <a href="#">2180698</a>    | Body Side Assembly LH S/S (Code 9402CG0180)                                                                      | 1      | 1       | 1       | 1        |           |            |          |
|      | <a href="#">2180599</a>    | Side Assembly RH (Code 9402CG0180)                                                                               | 1      | 1       | 1       | 1        |           |            |          |
|      | <a href="#">2180598</a>    | Side - Right Assembly S/S (Code 9402CG0180)                                                                      | 1      | 1       | 1       | 1        |           |            |          |
|      | <a href="#">2349499</a>    | Body Side Assembly RH (Code 9402CG0181)                                                                          | 1      | 1       | 1       | 1        |           |            |          |
|      | <a href="#">2349498</a>    | Body Side Assembly LH (Code 9402CG0181)                                                                          | 1      | 1       | 1       | 1        |           |            |          |
|      | <a href="#">2349497</a>    | Body Side Assembly RH (Code 9402CG0181)                                                                          | 1      | 1       | 1       | 1        |           |            |          |
|      | <a href="#">2349496</a>    | Body Side Assembly LH (Code 9402CG0181)                                                                          | 1      | 1       | 1       | 1        |           |            |          |
| 30   | <a href="#">2180899</a>    | Body Back & Bottom Assy (15F)                                                                                    | 1      |         |         |          |           |            |          |
|      | <a href="#">2180898</a>    | Body Back & Bottom S/S                                                                                           | 1      |         |         |          |           |            |          |
|      | <a href="#">2181399</a>    | Body Back & Bottom Assy (30FT)                                                                                   |        | 1       |         |          |           |            |          |
|      | <a href="#">2181398</a>    | Body Back & Bottom S/S                                                                                           |        | 1       |         |          |           |            |          |
|      | <a href="#">2180897</a>    | Body Back & Bottom Assy. 18" W.C.                                                                                |        |         | 1       |          |           |            |          |
|      | <a href="#">2180896</a>    | Body Back & Bottom Assy S/S                                                                                      |        |         | 1       |          |           |            |          |
|      | <a href="#">2181397</a>    | Back & Bottom Assembly W.C.                                                                                      |        |         |         | 1        |           |            |          |
|      | <a href="#">2181396</a>    | Back & Bottom Assembly S/S                                                                                       |        |         |         | 1        |           |            |          |
| 31   | <a href="#">2351900</a>    | Control Shield                                                                                                   | 1      |         |         |          |           |            |          |
|      | <a href="#">2352500</a>    | Control Shield                                                                                                   |        | 1       |         |          |           |            |          |
|      | <a href="#">2351902</a>    | Control Sheild                                                                                                   |        |         | 1       |          |           |            |          |
|      | <a href="#">2352502</a>    | Control Sheild                                                                                                   |        |         |         | 1        |           |            |          |
| 32   | <a href="#">2149400</a>    | Door Hinge Right Hand                                                                                            | 1      | 1       | 1       | 1        |           |            |          |
|      | <a href="#">2149401</a>    | Door Hinge Left Hand                                                                                             | 1      | 1       | 1       | 1        |           |            |          |
| 33A  | <a href="#">2349500</a>    | Control Panel                                                                                                    | 1      |         |         |          |           | 9-APR/12   |          |
|      | <a href="#">2350000</a>    | Control Panel                                                                                                    |        | 1       |         |          |           | 9-APR/12   |          |
|      | <a href="#">2349501</a>    | Control Panel                                                                                                    |        |         | 1       |          |           | 9-APR/12   |          |
|      | <a href="#">2350001</a>    | Control Panel                                                                                                    |        |         |         | 1        |           |            |          |
| 33B  | <a href="#">4530539</a>    | Control Panel ED-15F/15SF (Backward Compatible)                                                                  | 1      |         |         |          | 9-APR/12  |            |          |
|      | <a href="#">4530541</a>    | Control Panel ED-30F/30SF (Backward Compatible)                                                                  |        | 1       |         |          | 9-APR/12  |            |          |
|      | <a href="#">4530540</a>    | Control Panel EDU-18F/18SF (Backward Compatible)                                                                 |        |         | 1       |          | 9-APR/12  |            |          |
| 34   | <a href="#">2138900</a>    | Dial Insert F/ED-15F,30F (F) 200-375                                                                             | 1      | 2       | 1       | 2        |           |            |          |
|      | <a href="#">2138901</a>    | Dial Insert F/ED-15FE,30FE (C) 95-192                                                                            | 1      | 2       | 1       | 2        |           |            |          |
| 35A  | <a href="#">F561</a>       | 10-32 - 3/16 Socket Head Screw                                                                                   | 1      | 2       | 1       | 2        |           |            |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

# GARLAND PARTS IDENTIFICATION

## ED Fryers

### ED-15F / ED-30FT / EDU-18F / EDU-36FT

| ITEM | PART#                     | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | QTY    |         |         |          | FROM DATE | UP TO DATE | CRITICAL |
|------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------|---------|----------|-----------|------------|----------|
|      |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | ED-15F | ED-30FT | EDU-18F | EDU-36FT |           |            |          |
| 35B  | <a href="#">3043207</a>   | Knob Hub<br><b>Note: NOT interchangeable with items 35C / 35D.</b>                                                                                                                                                                                                                                                                                                                                                                                                                  | 1      | 2       | 1       | 2        |           | 27-JAN/10  |          |
| 35C  | <a href="#">3043208</a>   | Hub 1/4" Not Flat<br><b>Note:</b><br><ul style="list-style-type: none"> <li>Used <b>FROM</b> (serial#)1001100100982 (model) ED-15F-0008 <b>UP TO</b> (serial#)1204100100470 (model) ED-30FT-0045.</li> <li><b>NOT interchangeable with items 35B / 35D.</b></li> </ul>                                                                                                                                                                                                              | 1      | 2       | 1       | 2        | 27-JAN/10 | 9-APR/12   |          |
| 35D  | <a href="#">3043200</a>   | Hub (non-FF)<br><b>Note: NOT interchangeable with items 35B / 35C.</b>                                                                                                                                                                                                                                                                                                                                                                                                              | 1      | 2       | 1       |          | 9-APR/12  |            |          |
| 35E  | <a href="#">3043300</a>   | Retaining Spring                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 1      | 2       | 1       | 2        |           |            |          |
| 35F  | <a href="#">3043100</a>   | Knob                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1      | 2       | 1       | 2        |           |            |          |
| 35G  | <a href="#">4512224</a>   | Dial Kit (Includes items: 35A, 35B, 35E, 35F)                                                                                                                                                                                                                                                                                                                                                                                                                                       | 1      | 2       | 1       | 2        |           | 27-JAN/10  |          |
| 35H  | <a href="#">4527733</a>   | ED-Fryer Knob Assembly<br><b>Note:</b><br><ul style="list-style-type: none"> <li>Includes a Knob (<a href="#">3043100</a>) and a spacer.</li> <li>Can install this knob asm on an older unit with Hub <a href="#">3043208</a> (35C) and Limiter Plate <a href="#">4527806</a> (item 42B). See illustration for related components.</li> <li>Implemented <b>FROM</b> (serial#)1001100100982 (model) ED-15F-0008 <b>UP TO</b> (serial#)1204100100470 (model) ED-30FT-0045.</li> </ul> | 1      | 2       | 1       | 2        | 27-JAN/10 | 9-APR/12   |          |
| 36   | <a href="#">2146800</a>   | Illuminated Power Switch                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1      | 2       | 1       | 2        |           |            |          |
| 37   | <a href="#">3011400</a>   | PVC Clear Cap c/w Black Bezel                                                                                                                                                                                                                                                                                                                                                                                                                                                       |        |         | 1       | 2        |           |            |          |
| 38   | <a href="#">2385500</a>   | Back Splash                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1      |         |         |          |           |            |          |
|      | <a href="#">2385600</a>   | Back Splash                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |        | 1       |         |          |           |            |          |
|      | <a href="#">2385501</a>   | Back Splash                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |        |         | 1       |          |           |            |          |
|      | <a href="#">2385601</a>   | Back Splash 36"                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |        |         |         | 1        |           |            |          |
| 39   | <a href="#">2138500</a>   | <b>Amber Indicator Light (Obsolete, use <a href="#">CK4533018</a>)</b>                                                                                                                                                                                                                                                                                                                                                                                                              | 1      | 2       | 1       | 2        |           | 30-APR-16  | C        |
|      | <a href="#">CK4533018</a> | <b>Service Kit for Indicator Light 250V Amber</b><br>Notes: Kit includes green rectangular 250V light 4533018 and amber rectangular lens 4533017.                                                                                                                                                                                                                                                                                                                                   | 1      | 2       | 1       | 2        | 1-MAY-16  |            | C        |
| 40   | <a href="#">2149299</a>   | Door Assembly 15"                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1      |         |         |          |           |            |          |
|      | <a href="#">2149296</a>   | Door Assembly 30"                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        | 1       |         |          |           |            |          |
|      | <a href="#">2149298</a>   | Door Assembly 18"                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |         | 1       |          |           |            |          |
|      | <a href="#">2149295</a>   | Door Assembly 36"                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |        |         |         | 1        |           |            |          |
| 41   | <a href="#">2149300</a>   | Door Pull                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1      | 1       | 1       | 1        |           |            |          |
| 42A  | <a href="#">2491500</a>   | Stop Plate Assembly                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1      | 2       | 1       | 2        |           | 27-JAN/10  |          |
| 42B  | <a href="#">4527806</a>   | Mechanical Limiter Plate ED-Fryers                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1      | 2       | 1       | 2        | 28-JAN/10 | 9-APR/12   |          |
| 43   | <a href="#">2159300</a>   | Insulator-Thermostat                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 1      | 2       | 1       | 2        |           | 27-JAN/10  |          |
| 44A  | <a href="#">2142000</a>   | <b>Electronic Thermostat 200-375F</b><br><b>Note: Part is No Longer Available.</b> Use Conversion Kit (item# 44B).                                                                                                                                                                                                                                                                                                                                                                  | 1      | 2       | 1       | 2        | NLA       | 27-JAN/10  | C        |

\* NOT ILLUSTRATED

#### RECOMMENDED STOCK PARTS

# GARLAND PARTS IDENTIFICATION

## ED Fryers

### ED-15F / ED-30FT / EDU-18F / EDU-36FT

| ITEM | PART#                                                                                                                                                                                                                                                                                                                                                  | DESCRIPTION                                                                                                                                                                       | QTY    |         |         |          | FROM DATE | UP TO DATE           | CRITICAL |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|---------|---------|----------|-----------|----------------------|----------|
|      |                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                   | ED-15F | ED-30FT | EDU-18F | EDU-36FT |           |                      |          |
| 44B  | <a href="#">4531019</a>                                                                                                                                                                                                                                                                                                                                | Tstat Kit - ED15 F/SF                                                                                                                                                             | 1      |         |         |          |           | 9-APR/12<br>see Note |          |
|      | <a href="#">4531020</a>                                                                                                                                                                                                                                                                                                                                | Tstat Kit - ED30 FT/SFT                                                                                                                                                           |        | 1       |         |          |           | 9-APR/12<br>see Note |          |
|      | <a href="#">4531021</a>                                                                                                                                                                                                                                                                                                                                | Tstat Kit - EDU18 F/SF                                                                                                                                                            |        |         | 1       |          |           | 9-APR/12<br>see Note |          |
|      | <b>Note:</b> <ul style="list-style-type: none"> <li>Kit includes components as shown in illustration and install instructions (4531018).</li> <li>Use one of these Kits for any unit built UP TO 9-Apr-2012.</li> <li>Components in these Kits are used in units built FROM (serial#) 1204100100470 (model) ED-30FT-0045 (date) 9-Apr-2012.</li> </ul> |                                                                                                                                                                                   |        |         |         |          |           |                      |          |
| 45   | <a href="#">4527081</a>                                                                                                                                                                                                                                                                                                                                | <b>Electronic Thermostat</b><br><b>Note:</b><br>For any unit built between 28-Jan/2010 and 9-Apr/2012, please refer to Bulletin GAR-03-13-AIC for thermostat replacement options. | 1      | 2       | 1       | 2        | 28-JAN/10 |                      | C        |
| 46A  | <a href="#">2358200</a>                                                                                                                                                                                                                                                                                                                                | Shaft Seal N9030 x 1/4                                                                                                                                                            | 1      | 2       | 1       | 2        |           | 27-JAN/10            |          |
| 46B  | <a href="#">2382800</a>                                                                                                                                                                                                                                                                                                                                | Shaft Retaining Spring                                                                                                                                                            | 1      | 2       | 1       | 2        |           | 27-JAN/10            |          |
| 46C  | <a href="#">2167300</a>                                                                                                                                                                                                                                                                                                                                | Panel Bearing Assembly                                                                                                                                                            | 1      | 2       | 1       | 2        |           | 27-JAN/10            |          |
| 46D  | <a href="#">2167000</a>                                                                                                                                                                                                                                                                                                                                | Spring Tension Pin                                                                                                                                                                | 1      | 2       | 1       | 2        |           | 27-JAN/10            |          |
| 46E  | <a href="#">2166800</a>                                                                                                                                                                                                                                                                                                                                | Potentiometer Shaft                                                                                                                                                               | 1      | 2       | 1       | 2        |           | 27-JAN/10            |          |
| 46F  | <a href="#">2167100</a>                                                                                                                                                                                                                                                                                                                                | Bowed Spring Washer                                                                                                                                                               | 1      | 2       | 1       | 2        |           | 27-JAN/10            |          |
| 46G  | <a href="#">2167200</a>                                                                                                                                                                                                                                                                                                                                | Retaining Ring                                                                                                                                                                    | 1      | 2       | 1       | 2        |           | 27-JAN/10            |          |
| 47   | 4530531                                                                                                                                                                                                                                                                                                                                                | 0.437 O-Ring                                                                                                                                                                      | 1      | 1       | 1       |          | 9-APR/12  |                      |          |
| 48A  | F648                                                                                                                                                                                                                                                                                                                                                   | #10 - 32 x 3/8 Set Screw                                                                                                                                                          | 1      | 1       | 1       |          | 9-APR/12  |                      |          |
| 48B  | 4530532                                                                                                                                                                                                                                                                                                                                                | Tstat Shaft Extension                                                                                                                                                             | 1      | 1       | 1       |          | 9-APR/12  |                      |          |
| 48C  | 4530537                                                                                                                                                                                                                                                                                                                                                | Fryer Control Stop                                                                                                                                                                | 1      | 1       | 1       |          | 9-APR/12  |                      |          |
| 48D  | F646                                                                                                                                                                                                                                                                                                                                                   | #6 - 32 x 0.437 Standoff                                                                                                                                                          | 2      | 2       | 2       |          | 9-APR/12  |                      |          |
| 48E  | <a href="#">4530538</a>                                                                                                                                                                                                                                                                                                                                | Fryer Control Plate                                                                                                                                                               | 1      | 1       | 1       |          | 9-APR/12  |                      |          |
| 48F  | F647                                                                                                                                                                                                                                                                                                                                                   | Extension Retaining Ring 0.437                                                                                                                                                    | 1      | 1       | 1       |          | 9-APR/12  |                      |          |
| 52   | <a href="#">078174-1</a>                                                                                                                                                                                                                                                                                                                               | <b>Magnetic Door Catch</b>                                                                                                                                                        | 1      | 1       | 1       | 1        |           |                      | C        |
| 53   | 2139600                                                                                                                                                                                                                                                                                                                                                | Magnet Mounting Bracket                                                                                                                                                           | 1      | 1       | 1       | 1        |           | 5-MAY/91             |          |
|      | <a href="#">2183500</a>                                                                                                                                                                                                                                                                                                                                | Magnet Bracket                                                                                                                                                                    | 1      | 1       | 1       | 1        | 5-MAY/91  |                      |          |
| 54   | <a href="#">1028500</a>                                                                                                                                                                                                                                                                                                                                | Connector 3/8" 90 DEG. Romex                                                                                                                                                      | 1      | 2       | 1       | 2        |           |                      |          |
| 55   | <a href="#">1029600</a>                                                                                                                                                                                                                                                                                                                                | Antishorts #1                                                                                                                                                                     | 2      | 4       | 2       | 4        |           |                      |          |
| 56   | <a href="#">G01497-1</a>                                                                                                                                                                                                                                                                                                                               | Bx Connector Straight 3/8".                                                                                                                                                       | 1      | 2       | 1       | 2        |           |                      |          |
| 57A  | <a href="#">F157</a>                                                                                                                                                                                                                                                                                                                                   | Levelling Bolt-3/8-16X1 1/16"                                                                                                                                                     | 4      | 4       | 4       | 4        |           |                      |          |
| 57B  | <a href="#">078109-2</a>                                                                                                                                                                                                                                                                                                                               | Metal Leg (Optional)                                                                                                                                                              | 4      | 4       | 4       | 4        |           |                      |          |
| 57C* | <a href="#">G01503-10</a>                                                                                                                                                                                                                                                                                                                              | Leg Weld Nut                                                                                                                                                                      | 4      | 4       | 4       | 4        |           |                      |          |
| 58   | <a href="#">2169200</a>                                                                                                                                                                                                                                                                                                                                | Panel Control Wire F/ED15F,30F                                                                                                                                                    | 1      | 2       | 1       | 2        |           |                      |          |
| 59   | <a href="#">2169100</a>                                                                                                                                                                                                                                                                                                                                | Contactor Control Wire F/ED-15F                                                                                                                                                   | 1      |         |         |          |           |                      |          |
|      | 2170500                                                                                                                                                                                                                                                                                                                                                | Contactor Control Wire F/ED-30F                                                                                                                                                   |        | 1       |         |          |           |                      |          |
|      | 2169101                                                                                                                                                                                                                                                                                                                                                | Control Wires - Contactor                                                                                                                                                         |        |         | 1       |          |           |                      |          |
|      | 2170501                                                                                                                                                                                                                                                                                                                                                | Control Wires - Contactor                                                                                                                                                         |        |         |         | 1        |           |                      |          |
| 60   | <a href="#">2168800</a>                                                                                                                                                                                                                                                                                                                                | Contactor Jumper F/ED-15F,30F Export                                                                                                                                              | 1      | 2       | 1       |          |           |                      |          |
|      | <a href="#">2168801</a>                                                                                                                                                                                                                                                                                                                                | Contactor Jumper                                                                                                                                                                  |        |         |         | 2        |           |                      |          |

\* NOT ILLUSTRATED

#### **RECOMMENDED STOCK PARTS**

# GARLAND PARTS IDENTIFICATION

ED Fryers

## ED-15F / ED-30FT / EDU-18F / EDU-36FT

| ITEM | PART#                    | DESCRIPTION                      | QTY          |         |         |          | FROM<br>DATE | UP TO<br>DATE | CRITICAL |
|------|--------------------------|----------------------------------|--------------|---------|---------|----------|--------------|---------------|----------|
|      |                          |                                  | ED-15F       | ED-30FT | EDU-18F | EDU-36FT |              |               |          |
| 61   | <a href="#">2184801</a>  | Contact Wire                     | 1            |         |         |          |              |               |          |
|      | <a href="#">2184803</a>  | Contact Wire                     | 1            |         | 1       |          |              |               |          |
|      | <a href="#">2184800</a>  | Contact Wire                     |              | 1       |         |          |              |               |          |
|      | <a href="#">2184802</a>  | Contact Wires                    |              | 1       |         | 1        |              |               |          |
| 62   | 2184900                  | Left End Post Wires              | 1            |         |         |          |              |               |          |
|      | 2184901                  | Left End Post Wire Harness       |              |         | 1       |          |              |               |          |
|      | 2185000                  | Right End Post Wires             | 1            |         |         |          |              |               |          |
|      | 2185001                  | Right End Post Wires             | 1            |         | 1       |          |              |               |          |
|      | <a href="#">2185100</a>  | L.F. Left End Post Wires         |              | 1       |         |          |              |               |          |
|      | 2185101                  | L.F. Left End Post Wires Harness |              |         |         | 1        |              |               |          |
|      | <a href="#">2185200</a>  | L.F.Right End Post Wires         |              | 1       |         |          |              |               |          |
|      | <a href="#">2185201</a>  | L.F.Right End Post Wires         |              | 1       |         | 1        |              |               |          |
|      | <a href="#">2185300</a>  | R.F. Left End Post Wires         |              | 1       |         |          |              |               |          |
|      | 2185301                  | R.F. Left End Post Wires Harness |              |         |         | 1        |              |               |          |
|      | <a href="#">2185400</a>  | R.F.Right End Post Wires         |              | 1       |         |          |              |               |          |
|      | <a href="#">2185401</a>  | R.F.Right End Post Wires         |              | 1       |         | 1        |              |               |          |
| 63   | <a href="#">G01296-1</a> | <b>Pilot Red 240V</b>            |              |         | 1       | 1        |              |               | C        |
| 64   | <a href="#">4529725</a>  | Garland Nameplate 4 7/8"         | 1            | 1       | 1       | 1        |              |               |          |
| 65   | <a href="#">2285999</a>  | Leg Channel Assembly 15"         | 2            |         |         |          |              |               |          |
|      | <a href="#">2285998</a>  | Leg Channel Assembly 18"         |              |         | 2       |          |              |               |          |
|      | <a href="#">2285996</a>  | Leg Channel Assembly 30"         |              | 2       |         |          |              |               |          |
|      | <a href="#">2285995</a>  | Leg Channel Assembly 36"         |              |         |         | 2        |              |               |          |
| 80*  | 2184400                  | Wiring Diagram                   | ED-15F - DOM |         |         |          |              |               |          |
|      | 2184500                  | Wiring Diagram                   | ED-15F - EXP |         |         |          |              |               |          |
| 81*  | 2184600                  | Wiring Diagram                   | ED-30F - DOM |         |         |          |              |               |          |
|      | 2184700                  | Wiring Diagram                   | ED-30F - EXP |         |         |          |              |               |          |
| 82*  | 2184501                  | Wiring Diagram                   | EDU-18F      |         |         |          |              |               |          |
| 83*  | 2184701                  | Wiring Diagram                   | EDU-36F      |         |         |          |              |               |          |

\* NOT ILLUSTRATED

**RECOMMENDED STOCK PARTS**

## Related Bulletins (ED Series Electric Counter Equipment)

| BULLETIN #    | SUBJECT                                                  | DATE      |
|---------------|----------------------------------------------------------|-----------|
| GAR-03-13-AIC | ED Fryer, ED Super Fryer, Thermostat Replacement Options | 13-MAR-13 |

## Revision History (ED Series Electric Counter Equipment)

| REV | PAGE#        | ITEM#                    | NOTES                                                                                                                 | DATE       |
|-----|--------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------|------------|
| 14  |              |                          | Added - critical column                                                                                               | MAR 17/08  |
|     | 8            |                          | New Drawing                                                                                                           |            |
|     | 10           | 52,53                    | New P/N                                                                                                               |            |
| 15  | 10           | 53                       | Added serial#                                                                                                         | MAR 28/08  |
| 16  | 24,30        |                          | New drawing                                                                                                           | APR 03/08  |
|     | 26           | 38                       | Added p/n                                                                                                             |            |
|     | 32           | 38                       | Added p/n                                                                                                             |            |
| 17  | 21           | 15                       | New p/n, was <a href="#">G2840-1</a> (Cord & Plug Set 3/14 wire 15A)                                                  | JUL 11/08  |
| 18  | 13           | 4                        | Part# changed, was 0791130-1 (Fibrebrax 970J 1/8")                                                                    | OCT 18/10  |
|     | 16           |                          | New drawing                                                                                                           |            |
|     | 17           | 3                        | Part <a href="#">G0875-4</a> , NLA                                                                                    |            |
|     |              | 4                        | P/N was <a href="#">G0857-1-9</a> . QTY changed.                                                                      |            |
|     | 18           | 40                       | Now illustrated.                                                                                                      |            |
|     |              | 41A                      | New P/N                                                                                                               |            |
|     |              | 41B                      | Item was #41. P/N was <a href="#">2426000</a>                                                                         |            |
|     |              | 41C                      | Item was #42                                                                                                          |            |
|     | 25           | 6                        | Added Note.                                                                                                           |            |
|     | 26, 32       | 35B                      | Added <a href="#">3043208</a> , dates.                                                                                |            |
|     |              | 35E                      | Added <a href="#">4527733</a> , dates.                                                                                |            |
|     | 27           | 45,46,47,48,<br>49,50,51 | "Used UP TO" date added.                                                                                              |            |
|     | 27,32        | 42                       | Added <a href="#">4527806</a> , dates.                                                                                |            |
|     |              | 44                       | Added Note.                                                                                                           |            |
| 19  | 18           | 41A                      | Removed part. Was <a href="#">CK140</a> Prop Kit.                                                                     | NOV 1/10   |
|     | 26           | 26                       | Revised P/N, description of contactor                                                                                 | FEB 9/12   |
| 20  | 27           | 26                       | New contactor kit <a href="#">4531014</a> , to replace <a href="#">077062-1</a>                                       | JUN 15/12  |
|     |              | 26A                      | New contactor <a href="#">1489701</a>                                                                                 |            |
|     | 25,33        |                          | New illustrations for knob, t-stat and related parts.                                                                 |            |
|     | 24-38        |                          | New T-stat kits <a href="#">4531019/4531020/4531021</a> . Kits include a number of new components. See illustrations. |            |
|     | 27,33        | 44                       | Removed kit <a href="#">4527731</a> . Components are still available for purchase.                                    |            |
|     |              |                          | Ref: New book format                                                                                                  |            |
| 21  | 29, 37       | 45                       | Added new bulletin info. Modified illustrations.                                                                      | MAR 14/13  |
| 22  | 26, 34       | 7                        | Corrected part#, Terminal Box Assemblies.                                                                             | JUN 12/13  |
| 23  | ALL          |                          | Logo/Garland nameplate, old <a href="#">3077101</a> , new <a href="#">4529725</a>                                     | MAY 9/16   |
|     | 15           | 55                       | Added quantity.                                                                                                       |            |
|     | 18           | 45, 46, 47               | Added quantity.                                                                                                       |            |
|     | 19           | 54                       | Added quantity.                                                                                                       |            |
|     | 22           | 41,42,43,44              | Added quantity.                                                                                                       |            |
|     | 5, 17, 21    | 8, 21, 14                | Infinite switch, added CK to part#. Kit includes fasteners required.                                                  |            |
|     | 9            | 6                        | 6-Heat switch, was <a href="#">2146900</a> . Replaced by <a href="#">4523166</a> (CSA) / <a href="#">4523167</a> (CE) |            |
|     | 26, 34       | 6                        | Element. Added CK to part# except <a href="#">2147503</a> . Kit incl. fasteners required.                             |            |
|     | 26, 34       | 13                       | Switch, <a href="#">2398600</a> is replaced by <a href="#">CK4601247</a> .                                            |            |
|     | 5, 9, 17, 21 | 9, 7, 22, 9              | Added green indicator light kit <a href="#">CK4533015</a> . Light <a href="#">2138504</a> is obsolete. ECO-000497.    |            |
| 24  | 13, 28, 36   | 13, 39, 39               | Added amber indicator light kit <a href="#">CK4533018</a> . Light <a href="#">2138500</a> is obsolete. ECO-000497.    | JUNE 21/16 |
|     | 28, 36       | 39, 39                   | Corrected errors in descriptions.                                                                                     |            |

\*\* Page#/Item# reference the specific page/item numbers in the corresponding Revision only.

