

AcuRite Iris™ (5-in-1) Weather Station with Weather Ticker Display and Lightning Detection Instruction Manual

Home » Acurite » AcuRite Iris™ (5-in-1) Weather Station with Weather Ticker Display and Lightning Detection Instruction Manual 🏗



AcuRite IrisTM (5-in-1) Weather Station with Weather Ticker Display and Lightning Detection models 01022, 02080, 06046 Instruction Manual



SAVE THIS MANUAL FOR FUTURE REFERENCE.

ACU RITE

Congratulations on your new AcuRite product. To ensure the best possible product performance, please read this manual in its entirety and retain it for future reference.

Contents

- 1 Unpacking Instructions
- 2 Package Contents
- 3 Features & Benefits
- **4 LIGHTNING SENSOR**
- 5 AcuRite Iris SENSOR
- **6 FRONT OF DISPLAY**
- 7 SETUP
- 8 Set the Time, Date & Units
- 9 AcuRite Iris Sensor Installation
- **10 OPERATION**
- 11 Using the Professional Weather

Center

- 12 Rainfall Tracking
- 13 Weather Ticker™
- 14 Programmable Weather Alarms
- 15 Troubleshooting
- 16 Care & Maintenance
- 17 Calibrate the Rain Gauge
- 18 Specifications
- 19 FCC Information
- **20 Customer Support**
- 21 Limited 1-Year Warranty
- 22 Documents / Resources
 - 22.1 References
- 23 Related Posts

Unpacking Instructions

Remove the protective film that is applied to the LCD screen prior to using this product. Locate the tab and peel off to remove it.

Package Contents


- 1. Display with Tabletop Stand
- 2. AcuRite Iris Sensor
- 3. Lightning Sensor
- 4. Sensor Mounting Bracket
- 5. Mounting Hardware
- 6. Power Adapter
- 7. Instruction Manual

IMPORTANT

PRODUCT REGISTRATION

Register online to receive 1-year warranty protection www.acurite.com/product-registration

Features & Benefits



LIGHTNING SENSOR

1. Integrated Hanger

For easy placement.

2. Wireless Signal Indicator

Flashes when data is being sent to the companion unit.

3. Interference Indicator

Flashes when interference is detected (see page 14).

4. A-B-C Switch

ID code that must match display's A-B-C switch to ensure units synchronize.

5. Battery Compartment


6. Lightning Strike Indicator

Indicates a lightning strike has occurred within 25 miles (40 km).

7. Battery Compartment Cover

NOTE: Under no circumstances shall the Lightning Detector, Chaney Instrument Co., or the Primex Family of Companies be held responsible for any damages whatsoever that may result from the use of or inability to use this product, including without limitation any indirect, incidental, special, exemplary or consequential damages, which are expressly disclaimed. This disclaimer of liability applies to any damages or injury caused by any failure of performance, error, omission, inaccuracy, interruption, deletion, defect, delay in operation or transmission software virus, communication failure, theft or destruction or unauthorized access to, alteration of, or use of the product, whether for breach of contract, tortuous behavior (including, without limitation, strict liability), negligence, or under any other cause of action, to the fullest extent permissible by law. This does not affect any statutory rights which may not be disclaimed. The contents of this product, including all lightning and weather data, are provided "as is" and without warranty or condition of any kind, express or implied, including, without limitation, any warranty of merchantability or fitness for a particular purpose. Chaney Instrument Co. & the Primex Family of Companies do not warrant that this product or the data that it provides will be free of errors, interruptions, viruses,

or other harmful components. Chaney Instrument Co. & the Primex Family of Companies do not warrant the accuracy or reliability of any lightning strike alerts, weather data, or other information provided by the product. Chaney Instrument Co. & the Primex Family of Companies reserve the right to alter the product or withdraw it from the market at its sole discretion.

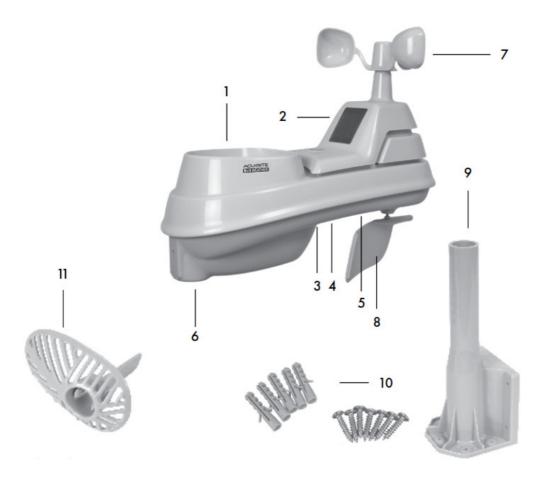

AcuRite Iris SENSOR

1. Rainfall Collector Funnel

2. Solar Cell Panel

Converts sunlight into power to run internal aspirating fan.

Internal Aspirating Fan (not shown)

Draws ambient air into the sensor to reduce solar radiation heating, resulting in more accurate temperature measurement.

3. A-B-C Switch

ID code that must match display's A-B-C switch to ensure units synchronize.

- 4. Battery Compartment
- 5. **Temperature & Humidity Sensors** (internal)
- 6. **Mounting Point**
- 7. Wind Speed Anemometer
- 8. Wind Direction Vane
- 9. Mounting Bracket
- 10. Mounting Hardware

Includes 5 anchors & the following screws:

Qty	Diameter	Length
5	#4	3/4"
1	#4	1/2"
1	#6	1/2"

11. Debris Filter

Pre-installed to prevent debris from entering the rain gauge.



FRONT OF DISPLAY

1. > Button

Press to view rainfall records (see page 18).

2. select Button

Press to cycle through available readings and access options, alarms, and records menu.

For setup preferences and manually cycling through Weather Ticker messages (when the display is not connected to additional sensors). For manually cycling add-on sensor data (when display is connected to additional sensors).

4. options Button

For calibration and setup preferences.

5. SET enter Button

For setup preferences.

6. alarms Button

For alarm setup preferences.

7. records Button

Press to view historical records for reading selected.

8. clear Button

Press to clear selected record.

FRONT OF DISPLAY



1. Current Outdoor Temperature

Arrow indicates direction temperature is trending.

2. Outdoor Low-Temperature Record

Lowest temperature recorded since midnight.

3. Outdoor High Temperature Record

Highest temperature recorded since midnight.

4. Current Outdoor Humidity

Arrow indicates direction humidity is trending.

5. Outdoor Low Humidity Record

Lowest humidity recorded since midnight.

6. Outdoor High Humidity Record

Highest humidity recorded since midnight.

7. Weather Select

Heat Index calculation displays when temperature is 80°F (27°C) or higher. Dew Point calculation displays when temperature is 79°F (26°C) or below. Wind chill calculation displays when temperature is 40°F (4°C) or lower.

8. Alarm ON Indicator

Indicates alarm is activated to emit an audible alert when conditions exceed your presets (see page 20).

9. Rainfall

Displays most recent rainfall total (today, yesterday or this week).

10. Rainfall History

Displays historical rainfall totals (see page 18).

11. Sensor Signal Strength

12. Sensor Low Battery Indicator

13. Lightning Sensor Signal Strength

14. Interference Indicator

Flashes when interference is detected (see page 14).

15. Lightning Sensor Low Battery Indicator

16. Weather Ticker

Streams real-time data (see page 19).

17. Strike Counter

Displays most recent total of lightning strikes that have been detected (today, this week, this month).

18. **Clock**

Automatically updates for Daylight Saving Time.

19. Lightning Strike Indicator

Indicates a lightning strike has occurred within 25 miles.

20. Estimated Distance to Storm Front

Updates with latest lightning strike detected today.

21. V Icon

Indicates display is in auto-dimming brightness mode (see page 12).

22. Display Low Battery Indicator

23. **Date**

24. Add-on Sensor Low Battery Indicator

If applicable (see page 17).

25. Add-On Sensor Signal Strength

If applicable (see page 17).

26. Auto-Cycle Indicator

Indicates auto-cycle mode is enabled. If applicable (see page 17).

27. Add-On Sensor Indicator

If applicable (see page 17).

28. Current Humidity for #27 or #30

Arrow icon indicates direction humidity is trending.

29. Humidity Level Indicator

Indicates a high, low, or ideal humidity comfort level.

30. Indoor Indicator

Indicates indoor (display) conditions are being shown.

31. Current Temperature for #27 or #30

Arrow icon indicates direction temperature is trending.

32. Peak Wind Speed

Highest speed from the last 60 minutes.

33. Average Wind Speed

Average wind speed over the past 2 minutes.

34. Current Wind Direction

35. Current Wind Speed

36. Wind Speed Alert Indicator

Activates when wind speed is over 32 mph.

37. Learning Mode Icon

Disappears after weather forecast self-calibration is complete (see page 16).

38. Previous 2 Wind Directions

39. 12 to 24 Hour Weather Forecast

Self-Calibrating Forecasting pulls data from your AcuRite Iris sensor to generate your personal forecast.

40. Barometric Pressure

Arrow icon indicates direction pressure is trending.

41. Freeze Alert Indicator

Indicates temperature is below freezing (32°F; 0°C).



BACK OF DISPLAY

1. Integrated Hang Hole

For easy wall mounting.

2. A-B-C Switch

ID code that must match the AcuRite Iris sensor and lightning sensor's A-B-C switches to ensure units synchronize.

3. RESET Button

Press and release for full reset to factory defaults.

- 4. Removable Tabletop Stand
- 5. Power Adapter
- 6. Battery Compartment Cover (not shown)
- 7. Plug-in for Power Adapter
- 8. Button

Dimmer control while using power adapter. Activates momentary backlight while on battery power.

SETUP

Lightning Sensor Setup

1. Set the A-B-C Switch


Locate the A-B-C switch inside the battery compartment. It can be set to A, B, or C. However, you must select the same letter choices for the display, AcuRite Iris sensor, and lightning sensor in order for the units to synchronize.

2. Install or Replace Batteries

AcuRite recommends high-quality alkaline or lithium batteries in the wireless sensor for the best product performance. Heavy duty or rechargeable batteries are not recommended.

The sensor requires lithium batteries in low-temperature conditions. Cold temperatures can cause alkaline batteries to function improperly. Use lithium batteries in the sensor for temperatures below -4°F / -20°C.

- 1. Slide off the battery compartment cover.
- 2. Insert 4 x AA batteries into the battery compartment, as shown. Follow the polarity (+/-) diagram in the battery compartment.
- 3. Replace the battery cover.

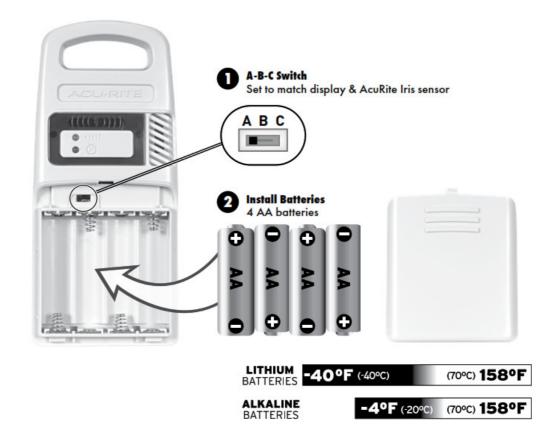

PLEASE DISPOSE OF OLD OR DEFECTIVE BATTERIES IN AN ENVIRONMENTALLY SAFE WAY AND IN ACCORDANCE WITH YOUR LOCAL LAWS AND REGULATIONS.

BATTERY SAFETY: Clean the battery contacts and also those of the device prior to battery installation. Remove batteries from equipment that will not be used for an extended period of time. Follow the polarity (+/-) diagram in the battery compartment. Promptly remove dead batteries from the device. Dispose of used batteries properly. Only batteries of the same or equivalent type as recommended are to be used. DO NOT incinerate used batteries. DO NOT dispose of batteries in fire, as batteries may explode or leak. DO NOT mix old and new batteries or types of batteries (alkaline/standard). DO NOT use rechargeable batteries. DO NOT recharge non-rechargeable batteries. DO NOT short-circuit the supply terminals.

AcuRite Iris Sensor Setup

1. Set the A-B-C Switch

Locate the A-B-C switch inside the battery compartment. It can be set to A, B, or C. However, you must select the same letter choices for the display, AcuRite Iris sensor and lightning sensor in order for the units to synchronize.

2. Install or Replace Batteries


Batteries MUST be installed for this product to operate. AcuRite recommends high-quality alkaline or lithium batteries for the best product performance. Heavy duty or rechargeable batteries are not recommended. The AcuRite Iris sensor requires lithium batteries in low-temperature conditions. Cold temperatures can cause alkaline batteries to function improperly. Use lithium batteries in the sensor for temperatures below -4°F/-20°C.

- 1. Slide off the battery compartment cover.
- 2. Insert 4 x AA batteries into the battery compartment, as shown. Follow the polarity (+/-) diagram in the battery compartment.
- 3. Replace the battery cover.

3. Remove Rain Gauge Stabilizer

Locate and remove the rain gauge stabilizer (plastic tab) taped into the bottom of the sensor. The rain gauge will

not function until this is removed.

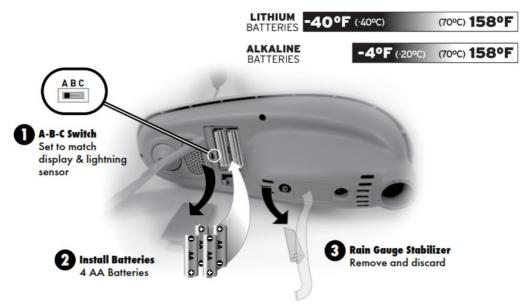

NOTE: If add-on sensors are being used with the display (see page 17), set them up at this time. If pairing more than one wireless sensor with the display, the A-B-C channel must differ between each add-on sensor. The display will automatically begin searching for add-on sensors during initial setup.

Display Setup

AcuRite recommends high-quality alkaline batteries for the best product performance. Heavy duty or rechargeable batteries are not recommended.

1. Set the A-B-C Switch

Locate the A-B-C switch inside the battery compartment. It can be set to A, B or C. However, you must select the same letter choices for the display, AcuRite Iris sensor, and lightning sensor in order for the units to synchronize.


2. Plug Power Adapter into Electrical Outlet

3. Install or Replace Backup Batteries (optional)

Insert 6 x AA alkaline batteries into the battery compartment, as shown. Follow the polarity (+/-) diagram in the battery compartment.

1 A-B-C Switch

Set to match AcuRite Iris sensor and lightning sensor

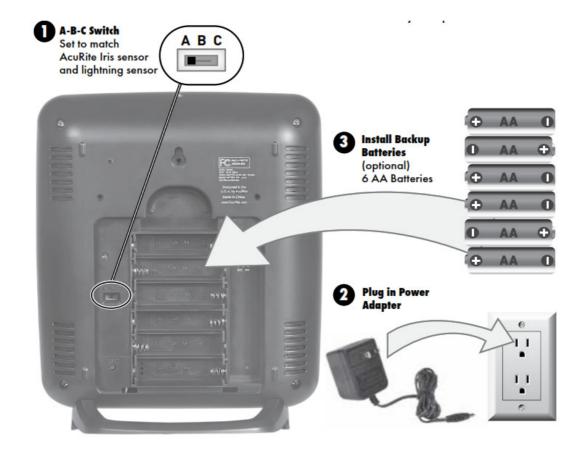

IMPORTANT: Batteries are a backup power source to preserve records in the event of a power outage. Power adapter is the recommended primary power source to enjoy the full functionality of this product.

Set the Time, Date & Units

The display will automatically enter SET MODE after the unit has powered on. Once in set mode, the preference you are currently setting will blink on the display.

To adjust the currently selected (flashing) item, press and release the " \(^\)" or " \(^\)" buttons (press and HOLD to fast adjust).

To save your adjustments, press and release the "SET enter" button again to adjust the next preference. The preference set order is as follows:

LANGUAGE (English, French)

COUNTRY (USA, Canada, Australia, Other)

TIME ZONE (EST, CST, MST, PST, AKT, HAT, NST, AST)

AUTO DST CHANGE (YES, NO)*

WEATHER TICKER SPEED (SLOW, MEDIUM, FAST)

CLOCK HOUR

CLOCK MINUTE

CALENDAR MONTH

CALENDAR DATE

CALENDAR YEAR

TEMPERATURE UNITS (°F or °C)

WIND SPEED UNITS (mph, kph, knots)

RAINFALL UNITS (in or mm)

PRESSURE UNITS (inHg or hPa)

DISTANCE UNITS (mi or km)

*If you live in an area that observes Daylight Saving Time, DST should be set to YES, even if it is not currently Daylight Saving Time.

You will automatically exit SET MODE if no buttons are pressed for 15 seconds. Enter SET MODE at any time by pressing the "SET enter" button.

Display Backlight Settings

This weather station's color display features three different lighting settings: High (100%) brightness, Medium (60%) brightness, and Low (15%) brightness.

Using battery power alone, the backlight is available momentarily for 10 seconds by pressing the button. When the display is powered with the power adapter, the backlight remains on at 100% brightness. Press the

button once to dim to 60% brightness; press again to dim to 15%, press a 3rd time to enter "AUTO DIM" mode. " will appear next to the clock.

NOTE: Pressing and holding the button for 5 seconds will disable the backlight. Once any button is pressed, the backlight will return to your selected setting.

AUTO DIM MODE: Automatically adjusts display brightness based on time of day.

6:00 a.m. - 9:00 p.m. = 100% brightness9:01 p.m. - 5:59 a.m. = 15% brightness

Placement for Maximum Accuracy

AcuRite sensors are sensitive to surrounding environmental conditions. Proper placement of the display, AcuRite Iris sensor and lightning sensor is critical to the accuracy and performance of this product.



Display Placement

Place the display in a dry area free of dirt and dust. To ensure accurate temperature measurement, place out of direct sunlight and away from heat sources or vents. Display stands upright for tabletop use or is wall-mountable.



AcuRite Iris Sensor Placement

The AcuRite Iris sensor is designed to remain outdoors all year long. Choose an open location with no obstructions above or around the sensor for the most accurate measurements.



Lightning Sensor Placement

The Lightning Sensor is water-resistant and is designed for general outdoor use, however, to extend its life place the sensor in an area protected from direct weather elements.

Hang the sensor using the integrated hanger, or by using string (not included) to hang it from a suitable location, like a well-covered tree branch. The best location is 4 to 8 feet above the ground with permanent shade and plenty of fresh air to circulate around the sensor.

Important Placement Guidelines

Display must be within 330 feet (100 meters) of AcuRite Iris sensor and lightning sensor.

MAXIMIZE WIRELESS RANGE

Place units away from large metallic items, thick walls, metal surfaces, or other objects that may limit wireless communication.

PREVENT WIRELESS INTERFERENCE

Place units at least 3 feet (.9 m) away from electronic devices (TV, computer, microwave, radio, etc.).

LOCATE AWAY FROM HEAT SOURCES

Position sensor away from heaters, air conditioners, chimneys, exhaust vents, asphalt, and concrete (surfaces that radiate heat).

LOCATE AWAY FROM HUMIDITY SOURCES

Avoid installing the sensor near pools, spas, or other bodies of water. Water sources may impact humidity

LOCATE AWAY FROM SPRINKLER HEADS

DO NOT install the sensor where it will be sprayed by a sprinkler system. This may force water inside the sensor.

LOCATE AWAY FROM WIND & RAIN OBSTRUCTIONS

DO NOT mount the sensor with obstructions around it. Consider a location that is a wide-open area, with few structures around to ensure accurate wind measurement.

Lightning Sensor Installation Guidelines

False Detection

This sensor features advanced technology to distinguish between lightning strikes and interference, however, in rare cases the sensor may "false detect" lightning activity due to interference. In these situations, verify there is no lightning in the area and then relocate the sensor. If the false detections persist, identify and relocate the source of interference or relocate the sensor.

Interference

The sensor features enhanced interference rejection capabilities to prevent false lightning detection. When the detector cannot detect lightning due to interference from nearby equipment, the sensor's interference indicator will flash.

- Electric motors (windshield wiper motor or fan motors in cars, hard drive and optical drive motors on your PC and AV equipment, well pumps, sump pumps)
- CRT monitors (PC monitors, TV's)
- Fluorescent light fixtures (turned off or on)
- Microwave ovens (while in use)
- · PC's and mobile phones

WARNING: Take shelter IMMEDIATELY when lightning is present, whether or not it has been detected by the Lightning Detector. If you are concerned about lightning strikes, follow all safety precautions to keep yourself and others safe. DO NOT rely on this Lightning Detector as your only source for warnings about potentially deadly lightning strikes or other severe weather conditions.

AcuRite Iris Sensor Installation Guidelines

INSTALLATION HEIGHT

Mount the sensor at a minimum height of 5 feet (1.5 meters) off the ground, in an open area. Higher is better for wind measurements – the National Weather Service recommends 33 feet (10 meters) high!

MOUNTING OPTIONS

The included mounting bracket is designed to screw directly onto wooden posts or surfaces that are 2"x 4" or larger. The sensor can also be mounted directly to 3/4" steel pipe (available at hardware stores and home centers).


SOLAR CELL INSTALLATION

Install the sensor with the solar cell facing SOUTH. This ensures the cell receives as much sun as possible and orients wind direction.

AcuRite Iris Sensor Installation

- 1. Fasten mounting base (included) to a post or pole (not included) using the 4 longer screws included in the hardware bag.
- 2. Insert the mounting base into the hole on the bottom of the sensor.
- 3. Make sure the arrows on the top of the sensor are pointed in the proper direction and the bubble level is centered. The solar cell should be facing south to properly orient the wind direction.
- 4. Fasten the sensor into the mounting base using the 2 shorter screws included in the hardware bag.

The AcuRite Iris sensor is now ready to use.

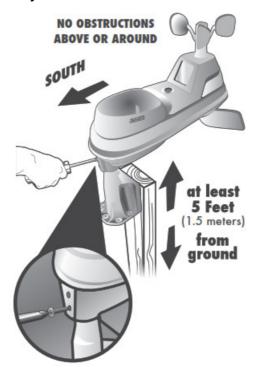

Basic Setup is Complete

The AcuRite Iris sensor will now synchronize with the display. It may take a few minutes for synchronization to complete. If both or one of the units appears to be functioning improperly, please refer to the troubleshooting section.

OPERATION


Using the Professional Weather Center

Learning Mode

Self-Calibrating Forecasting uses a unique algorithm to analyze changes in pressure over a time period (called Learning Mode) to determine your altitude. After 14 days, the icon disappears from the display screen. At this point, the self-calibrated pressure is tuned in to your location and the unit is ready for superior weather prediction.

Weather Forecast

AcuRite's patented Self-Calibrating Forecasting provides your personal forecast of weather conditions for the next 12 to 24 hours by collecting data from the sensor in your backyard. It generates a forecast with pinpoint accuracy – personalized for your exact location.

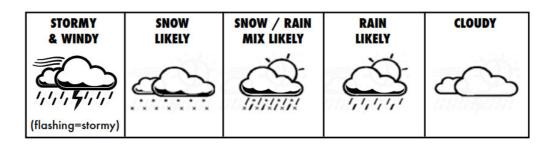

View the complete list of icons at www.AcuRite.com/acurite-icons

Weather Select

Weather Select displays data including wind chill, dew point and heat index based on current outdoor conditions. To manually change the Weather Select reading being displayed:

- 1. Press and release the "select" button until "WEATHER SELECT" is shown on the Weather Ticker.
- 2. Press and release the "options" button.
- 3. Press and release the " set " buttons
- 4. Press and release the " enter buttons until the desired reading is shown on the display.
- 5. Press and release the "enter" button to save your selection. After 5 seconds of inactivity, you will exit set mode.

Barometric Pressure

Subtle variations in barometric pressure greatly affect the weather. This weather center displays the current pressure with an arrow icon to indicate the direction the pressure is trending (FALLING, STEADY, or RISING).

Lightning Detection

The lightning sensor detects cloud-to-cloud, cloud-to-ground and intra-cloud lightning. When lightning is detected, the sensor will beep and the strike indicator will flash for each of the first 10 strikes. After 10 strikes, the sensor will enter silent mode but will continue to flash. The sensor will stay in silent mode for 2 hours after the last lightning

detection. The display will automatically show the most recent lightning event (TODAY, WEEK, MONTH). The icon appears on the display when lightning is detected and keeps a running count of lightning strikes detected. The display shows an estimate of the distance to the front of today's lightning-producing storm.

Expand the System

The display features built-in sensors for measuring temperature and humidity at its location. The display can be expanded to track additional areas by using compatible Temperature & Humidity Sensors (optional; sold separately). Add up to 3 indoor/outdoor sensors to observe conditions in additional locations within 330 ft (100 m). Compatible Sensors are available at: www.AcuRite.com

Compatible Sensors	Perfect for:
Temperature & Humidity Sensor Model 06002	Indoor and outdoor applications
Temperature & Humidity Sensor Model 06044	Integrated digital display for conditions at a glance Measures temperature and humidity For indoor applications

View Indoor/Add-On Sensor Readings

The weather station displays the current indoor temperature and humidity readings, by default. If the weather station is being used with additional sensors (see Expand the System), toggle between indoor readings and each sensor's readings by pressing and releasing the "\sum " or " \sum " buttons.

In auto-cycle mode, the display will automatically cycle through indoor and each sensor's data. The auto-cycle mode can be activated by pressing and releasing the "\sim " or "\sim " buttons until the "\sim " indicator appears.

The Sensor Indicator is used to determine which add-on sensor readings you are viewing. For example, if the Sensor Indicator is displaying "A", the readings are being transmitted from the sensor with the A-B-C switch set to "A".

Rainfall Tracking

This weather station features enhanced tracking of historical rainfall data. Rain accumulation data is displayed for the current day, yesterday, or week (most recent rainfall total). Press the ">" button to review historical rainfall records.


Records are shown in the following order:

CURRENT YEAR TOTAL (default)
PREVIOUS MONTHLY TOTALS WITH RAIN (up to 12 months prior)
CURRENT YEAR TOTAL
PREVIOUS YEAR TOTAL
ALL-TIME TOTAL

Rainfall Data

in. 135 today	in. 135 yesterday	135 week
TODAY	YESTERDAY	WEEK
Displays rainfall recorded TODAY since 12:00 am, if applicable.	If there hasn't been any rainfall thi s week, the current month's rainfa II is displayed.	If there hasn't been any rainfall today, the current week's rainfall (Sunday to Saturday) is displayed, if applicable.

Rainfall History

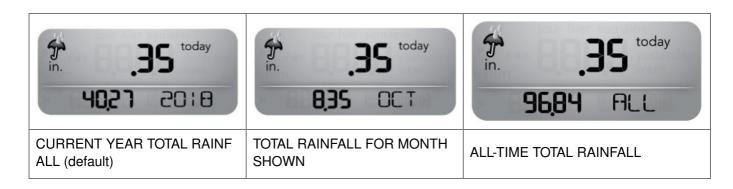

Weather Ticker™

The Weather Ticker automatically flashes your real-time weather information and alerts as text in the lower part of the display screen.

The possible WEATHER TICKER messages are as follows:

HEAT INDEX-XX

WINDCHILL-XX

DEW POINT-XX

IT FEELS LIKE XX OUTSIDE

TODAY'S HIGH HUMIDITY...OUTDOOR XX/INDOOR XX

TODAY'S LOW HUMIDITY...OUTDOOR XX/INDOOR XX

TODAY'S HIGH TEMP...OUTDOOR XXX/INDOOR XXX

TODAY'S LOW TEMP...OUTDOOR XXX/INDOOR XXX

7 DAY HIGH TEMP. XXMM/DD

7 DAY LOW TEMP. XXMM/DD

30 DAY HIGH TEMP. XXMM/DD

30 DAY LOW TEMP. XXMM/DD

ALL TIME HIGH TEMP. XXX...RECORDED MM/DD/YY

ALL TIME LOW TEMP. XXX...RECORDED MM/DD/YY

24 HOUR TEMP. CHANGE +XX

ALL TIME HIGH WIND XX MPH...RECORDED MM/DD/YY

7 DAY AVERAGE WIND XX MPH

TODAY'S AVERAGE WIND XX MPH

MOON- NEW

MOON- WAXING CRESCENT

MOON- FIRST QUARTER

MOON-WAXING GIBBOUS

MOON- FULL MOON- WANING GIBBOUS

MOON- LAST QUARTER

MOON- WANING CRESCENT

INDOOR HUMIDITY OK

INDOOR HUMIDITY HIGH

INDOOR HUMIDITY LOW

NEW LOW TEMP. RECORD XX

NEW HIGH TEMP. RECORD XX

NEW WIND RECORD TODAY XX

CURRENT RAINFALL RATE X.XX /HR.

RAIN EVENT STARTED XX HRS. AGO

5-IN-1 SENSOR BATTERIES LOW

DISPLAY BATTERIES LOW

5-IN-1 SENSOR SIGNAL LOST...CHECK BATTERIES AND PLACEMENT

CAUTION HEAT INDEX IS XXX

CAUTION WIND CHILL IS XXX

LIGHTNING DETECTED...XX MILES AWAY...STRIKES CLOSER

LIGHTNING DETECTED...XX MILES AWAY...STRIKES FARTHER AWAY

LIGHTNING STRIKES...LAST 48 HOURS - XXXX

LIGHTNING STRIKES...LAST MONTH - XXXX

LIGHTNING STRIKES...THIS YEAR - XXXX

LIGHTNING STRIKES...LAST YEAR - XXXX

LIGHTNING STRIKES...ALL TIME - XXXX

MOST LIGHTNING...IN ONE DAY - XXXX...MM/DD/YY

CAN'T DETECT LIGHTNING...RELOCATE SENSOR

LIGHTNING SENSOR...BATTERIES LOW

LIGHTNING SENSOR...SIGNAL LOST...CHECK BATTERIES... AND PLACEMENT

High and Low Records

Today's high and low records are displayed for outdoor temperature and humidity. Today's records automatically clear at 12:00am midnight every day.

Historical records (daily, weekly, monthly) can also be viewed by accessing the records menu. Records include:

OUTDOOR TEMPERATURE
OUTDOOR HUMIDITY
BAROMETRIC PRESSURE
WIND SPEED
RAINFALL
INDOOR TEMPERATURE
INDOOR HUMIDITY
LIGHTNING STRIKES

View Records

- 1. Press and release the "select" button until the reading for which you wish to view is shown on the Weather Ticker screen.
- 2. Press and release the "records" button to enter RECORDS MODE.
- 3. Press and release the "^" or "\" buttons to cycle through available record values for that reading.
- 4. Repeat steps 1-3, as needed.

NOTE: To clear a record, press and release the "clear" button while viewing the record you wish to clear. Dashes display to confirm you have cleared the record.

Programmable Weather Alarms

Each selectable weather category features an alarm option. When an alarm sounds, the display emits audible

beeping and flashes the affected category, its alarm settings, and any other relevant data. Alarms can be customized to alert you when your programmed value is reached. Alarms include:

OUTDOOR TEMPERATURE OUTDOOR HUMIDITY BAROMETRIC PRESSURE WIND SPEED WEATHER SELECT **RAINFALL** INDOOR TEMPERATURE INDOOR HUMIDITY LIGHTNING STRIKES (ON/OFF only; ON by default)

Setup an Alarm

Press and release the "select" button until the reading for which you wish to set an alarm for is shown on the Weather Ticker screen.

- 1. Press and release the "alarms" button to enter ALARM SET MODE.
- 2. Press and release the " enter button.
- 3. Press and release the "∧" or ∨"" buttons until "ALARM ON" is flashing on the Weather Ticker screen.
- 4. Press and release the " enter " button. The current LOW alarm value will be shown on the display.
- 5. Press and release the "∧" or "∨" buttons to adjust the alarm's LOW value.
- 6. Press and release the enter button. The current HIGH alarm value will be shown on the display.
- 7. Press and release the "\times" or "\times" buttons to adjust the alarm's HIGH value.
- 8. Press and release the "SET " enter button.
- 9. Repeat steps 1-8, as needed.

Disable an Alarm

Press and release the "select" button until the reading for which you wish to set an alarm is shown on the Weather Ticker screen.

- 1. Press and release the "alarms" button to enter ALARM SET MODE.
- 2. Press and release the enter button.
- 3. Press and release the "↑" or "▼" buttons until "ALARM OFF" is flashing on the Weather Ticker screen.
 - " SET "
- 4. Press and release the enter button.
- 5. Repeat steps 1-4, as needed.

NOTE: To disable ALL alarms at once, press and HOLD the "alarms" button for 15 seconds.

Troubleshooting

Problem	Possible Solution
---------	-------------------

No AcuRite Iris sensor or lightning sensor reception no bars	 Relocate the display and/or the sensor. The units must be within 330 ft (100 m) of each other. Make sure all units are placed at least 3 feet (.9 m) away from electronics that may interfere with the wireless communication (such as TVs, microwaves, computers, etc). Use standard alkaline batteries (or lithium batteries in sensor when the temper ature is below -20°C/-4°F). Do not use heavy-duty or rechargeable batteries. NO TE: It may take a few minutes for display and sensors to synchronize after batteri es are replaced. Synchronize the units: Bring both sensors and display indoors and remove power adapter/batteries f rom all. Reinstall batteries in outdoor sensors. Reinstall power adapter/batteries in display. Let the units sit within a couple feet of each other for a few minutes to gain a s trong connection.
Outdoor temperature is flas hing or showing dashes	Flashing of the outdoor temperature may be an indication of wireless interference. • Make sure the A-B-C switch in the battery compartments the display and both sensors are switched to the same letter. You may choose A, B or C; but units mu st match to sync up. Sometimes changing to a different channel can help.
Inaccurate forecast	 Weather Forecast icon predicts conditions for the next 12 to 24 hours, not curr ent conditions. Has Learning Mode icon disappeared from the display? Learning Mode must c omplete before forecast and pressure will be accurate. Allow unit to run continuously for 33 days. Battery removal or resetting the disp lay will restart Learning Mode. After 14 days, the forecast should be fairly accurat e, however, Learning Mode calibrates for a total of 33 days.
Inaccurate temperature or h umidity	 Make sure both the display and AcuRite Iris sensor are placed away from any heat sources or vents (see page 13). Make sure both units are positioned away from moisture sources (see page 13). Make sure AcuRite Iris sensor is mounted at least 1.5 m (5 ft) off of the ground. Calibrate indoor and outdoor temperature and humidity (see page 24).
No rainfall	 Check to ensure the rain gauge stabilizer (plastic tab) has been removed from the bottom of the sensor (see page 10). Clear debris, such as leaves, out of the rain collector funnel and debris screen. Calibrate the Rain Gauge (see page 25).

What is wind reading being compared to? Pro weather stations are typically m ounted at 30 ft (9 m) high or more. Make sure to compare data using a sensor po Inaccurate wind sitioned at the same mounting height. • Check location of the sensor. Ensure it's mounted a minimum of 5 ft (1.5 m) in t readings he air with no obstructions around it (within several feet). Ensure wind cups are spinning freely. If they hesitate or stop try lubricating wit h graphite powder or spray lubricant. · Check that the power adapter is plugged into the display and an electrical outlet. Display screen not working Reset the display by pressing and releasing the RESET button, located in the b attery ompartment of the display. Time and date will need to be entered after a re set. If the display is being used with add-on Temperature & Humidity Sensors (model s 06002 or 06044), the A-B-C channels must differ between each add-on sensor. 1. Bring the display and wireless sensors together and position them side-by-sid 2. Unplug cord & remove the batteries from the display. 3. Verify that each sensor has a different A-B-C channel selected. • Model 06002 - Locate the A-B-C switch inside the battery compartment to adju Add-on Sensor not recogniz st the channel setting. ed • Model 06044 - Locate the A-B-C button on the back of the sensor to adjust cha nnel setting (indicated on sensor display). 4. Re-install sensor batteries (if applicable). 5. Plug in & re-install display batteries. NOTE: It may take a few minutes for the display and sensor(s) to synchronize af ter batteries are replaced. Relocate the lightning sensor. Interference Indicator is flas • Make sure the lightning sensor is placed at least 3 feet (.9 m) away from electro hing nics that may cause interference (see page 14).

If your AcuRite product does not operate properly after trying the troubleshooting steps, visit www.acurite.com/support.

Care & Maintenance

Display Care

Clean with a soft, damp cloth. Do not use caustic cleaners or abrasives. Keep away from dust, dirt, and moisture. Clean ventilation ports regularly with a gentle puff of air.

AcuRite Iris Sensor Care Clean the Sensor

Clean with a soft damp cloth. Do not use caustic cleaners or abrasives that will mar the polished surfaces of the rain collection funnel or the solar cell. Scratches will result in decreased performance and reliability.

Insect Prevention

Insects may cause obstructions and interrupt data by nesting in or on the AcuRite Iris sensor. To limit this problem, spray sensor with a household insect repellent. Consult the insect repellent instructions prior to use.

Snow & Freezing Weather

The AcuRite Iris sensor will not be damaged by freezing conditions. NOTE: If the rain collector cup fills with snow and then melts, it will register as rain on the display.

Clean the Rain Collector Cup

Remove and empty rain collector debris filter. The debris filter is located in the rain collector funnel. Remove from the top by gently squeezing and pulling out.

Clean the Wind Vane & Anemometer

Remove foreign matter from the outside of the sensor for free movement of the wind vane and anemometer. If needed, use a small amount of spray lubricant, clear silicone or graphite powder on the anemometer for improved movement.

Lightning Sensor Care

Clean with a soft, damp cloth. Do not use caustic cleaners or abrasives.

Calibration

The indoor and outdoor temperature and humidity readings, and barometric pressure* can be calibrated on the display to improve accuracy. Calibration can improve accuracy when sensor placement or environmental factors impact the data accuracy.

- 1. To access calibration mode, press and release the "select" button until the reading you wish to calibrate is shown on the Weather Ticker.
- 2. Press and release the "options" button.
- 3. If necessary, press and release the "\shi" or "\shi" button until "CALIBRATION" is shown on the Weather Ticker.
- 4. Press and release the enter button. The currently selected item will flash on the display.
- 5. Press and release the "^" or "\" button to calibrate the data value higher or lower from the actual reading.
- 6. To save your adjustments, press and release the "set" button. The "set" icon will remain illuminated next to calibrated values.
- 7. Repeat steps 1-6, as needed.

*Barometric pressure must be set to MANUAL mode to calibrate. To change from AUTO to MANUAL pressure mode and vice versa, press and release the "select" button until BAROMETER is shown on the Weather Ticker. Press and release the "options" button and then cycle through the options using the "\" or "\" button. Press and

release "enter" button once the mode you desire appears on the Weather Ticker. The "oc" icon will appear next to the barometric pressure to indicate that MANUAL mode has been activated. After 5-10 seconds of inactivity, the display will save the adjustments and exit calibration mode.

NOTE: Calibrations will be erased if the display is reset or if batteries are removed and the power adapter is unplugged.

Calibrate the Rain Gauge

The rain gauge on the AcuRite Iris sensor can be calibrated to improve accuracy. Items Needed: AcuRite Iris sensor, display, plastic cup, pin, screwdriver

- 1. First, ensure AcuRite Iris sensor is perfectly level using built-in bubble level.
- 2. Place display close so you can monitor it during calibration.
- 3. Make a pin hole in the bottom of a plastic cup. Hold the cup over the rain gauge and fill it with exactly 1 cup (8oz) of water, allowing the water to drip into the rain gauge. You should hear the internal buckets tip and see water drain through the rain gauge.
- 4. A few seconds after each bucket tip, the display displays rainfall in approximately 0.01" (.25 mm) or more increments.
- 5. The cup of water should take more than 20 minutes to empty; a quicker period will result in inaccurate calibration. Try to simulate a normal steady rainfall. When cup is empty of water, display should register 1.06" (27 mm).

Tips

- There should be nearly an equal number of water drops (about 25 water drops) between bucket tips. If not, adjust the calibration screws on the bottom of the AcuRite Iris sensor until an equal number of water drops are tipping the buckets. Then, restart the calibration procedure.
- If you don't hear the buckets tipping and see water dripping alternately out of each drain, there may be an issue with the rain gauge or it's an adjustment. See Troubleshooting on page 22.

Adjustment

If the rain gauge doesn't register close to 1.06" (27 mm), make an EQUAL adjustment to the two calibration screws on the bottom of the AcuRite Iris sensor. Turning screws clockwise increases rainfall; counterclockwise decreases rainfall.

- To adjust the rainfall reading by 2% turn both screws 1/8 of a turn.
- To adjust the rainfall reading by 4% turn both screws 1/4 of a turn.
- To adjust the rainfall reading by 8% turn both screws 1/2 of a turn.

Specifications

TEMPERATURE RANGE	Outdoor: -40°F to 158°F; -40°C to 70°C
	Indoor: 32°F to 122°F; 0°C to 50°C
HUMIDITY RANGE	Outdoor: 1% to 99%
	Indoor: 1% to 99%
LIGHTNING DETECTION RA	1 – 25 miles / 1.6 – 40km
WIND SPEED	0 to 99 mph; 0 to 159 km/h
WIND DIRECTION INDICATO	16 points
RAINFALL MEASUREMENT	0.01 inches (0.25 mm) and up
WIRELESS RANGE	330ft / 100m depending on home construction materials
OPERATING FREQUENCY	433 MHz
POWER	Display: 5V, 250mA adapter 6 x AA alkaline batteries (optional)
	AcuRite Iris Sensor: 4 x AA alkaline or lithium batteries
	Lightning Sensor: 4 x AA alkaline or lithium batteries
DATA REPORTING	Display: Indoor temperature & humidity: 60 second updates
	AcuRite Iris Sensor: Wind Speed: 18 second updates; Direction: 36 seconds; Outdoor temperature & humidity: 36 second updates
	Lightning Sensor: 24 second updates during normal conditions; 8 seconds onc e lightning detected

FCC Information

This device complies with part 15 of FCC rules. Operation is subject to the following two conditions:

- 1. This device may NOT cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user authority to operate the equipment. This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- 1. This device may not cause interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation of the device.

Customer Support

AcuRite customer support is committed to providing you with best-in-class service. For assistance, please have the model number of this product available and contact us in any of the following ways:



Chat with our support team at www.acurite.com/support



Email us at support@chaney-inst.com

- ► Installation Videos
- ► Instruction Manuals
- ► Replacement Parts

IMPORTANT

PRODUCT MUST BE REGISTERED TO RECEIVE WARRANTY SERVICE

PRODUCT REGISTRATION Register online to receive 1-year warranty protection <u>www.acurite.com/product-registration</u>

Limited 1-Year Warranty

AcuRite is a wholly-owned subsidiary of Chaney Instrument Company. For purchases of AcuRite products, AcuRite provides the benefits and services set forth herein.

For purchases of Chaney products, Chaney provides the benefits and services set forth herein. We warrant that all products we manufacture under this warranty are of good material and workmanship and, when properly installed and operated, will be free of defects for a period of one year from the date of purchase.

Any product which, under normal use and service, is proven to breach the warranty contained herein within ONE YEAR from the date of sale will, upon examination by us, and at our sole option, be repaired or replaced by us. Transportation costs and charges for returned goods shall be paid for by the purchaser. We hereby disclaim all responsibility for such transportation costs and charges.

This warranty will not be breached, and we will give no credit for products that have received normal wear and

tear not affecting the functionality of the product, been damaged (including by acts of nature), tampered, abused, improperly installed, or repaired or altered by others than our authorized representatives.

Remedy for breach of this warranty is limited to repair or replacement of the defective item(s). If we determine that repair or replacement is not feasible, we may, at our option, refund the amount of the original purchase price.

THE ABOVE-DESCRIBED WARRANTY IS THE SOLE WARRANTY FOR THE PRODUCTS AND IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED. ALL OTHER WARRANTIES OTHER THAN THE EXPRESS WARRANTY SET FORTH HEREIN ARE HEREBY EXPRESSLY DISCLAIMED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTY OF MERCHANTABILITY AND THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.

We expressly disclaim all liability for special, consequential, or incidental damages, whether arising in tort or by contract from any breach of this warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

We further disclaim liability from personal injury relating to its products to the extent permitted by law. By acceptance of any of our products, the purchaser assumes all liability for the consequences arising from their use or misuse. No person, firm or corporation is authorized to bind us to any other obligation or liability in connection with the sale of our products. Furthermore, no person, firm or corporation is authorized to modify or waive the terms of this warranty unless done in writing and signed by a duly authorized agent of ours.

In no case shall our liability for any claim relating to our products, your purchase or your use thereof, exceed the original purchase price paid for the product.

Applicability of Policy

This Return, Refund, and Warranty Policy applies only to purchases made in the United States and Canada. For purchases made in a country other than the United States or Canada, please consult the policies applicable to the country in which you made your purchase. Additionally, this Policy applies only to the original purchaser of our products. We do cannot and do not offer any return, refund, or warranty services if you buy products used or from resale sites such as eBay or Craigslist.

Governing Law

This Return, Refund, and Warranty Policy is governed by the laws of the United States and the State of Wisconsin. Any dispute relating to this Policy shall be brought exclusively in the federal or State courts having jurisdiction in Walworth County, Wisconsin; and purchaser consents to jurisdiction within the State of Wisconsin.



www.AcuRite.com

© Chaney Instrument Co. All rights reserved. AcuRite is a registered trademark of the Chaney Instrument Co., Lake Geneva, WI 53147. All other trademarks and copyrights are the property of their respective owners. AcuRite uses patented technology. Visit www.acurite.com/patents for details.

Printed in China 06046M INST 061821

Documents / Resources



acurite AcuRite Iris™ (5-in-1) Weather Station with Weather Ticker Display and Lightning Detection [pdf] Instruction Manual

AcuRite Iris 5-in-1 Weather Station, with Weather Ticker Display, and Lightning Detection, 0102 2, 02080, 06046

References

- 7 <u>Home -</u>
- ► <u>AcuRite Weather Monitoring | #1 Weather Station Brand in North America</u>
- **Icon Definitions and Terminology** | AcuRite
- Patented Technology | AcuRite
- Customer Support & FAQs | AcuRite Weather Monitoring

Manuals+.