

AJAX 11035 Wireless Low Voltage Relay



AJAX 11035 Wireless Low Voltage Relay User Manual

[Home](#) » [ajax](#) » AJAX 11035 Wireless Low Voltage Relay User Manual 

Contents

- [1 AJAX 11035 Wireless Low Voltage Relay](#)
- [2 Functional elements](#)
- [3 Installing](#)
- [4 Settings](#)
- [5 Technical specifications](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)




AJAX 11035 Wireless Low Voltage Relay



Relay is a dry contact relay to control a power supply remotely. The relay's dry contacts are electrically isolated to the power supply circuit of the device. Relay can be used in both low-voltage and domestic power grids. The device features two types of protection: voltage and temperature.

The relay can control the power supply of electrical appliances connected to the circuit via the Ajax apps, automation scenarios, via relay function button, or by pressing Button. Relay is connected to the Ajax security system via the Jeweller radio protocol. The communication range is up to 1,000 meters in an open space. The device works only with Ajax radio signal range extenders and hubs.

Functional elements

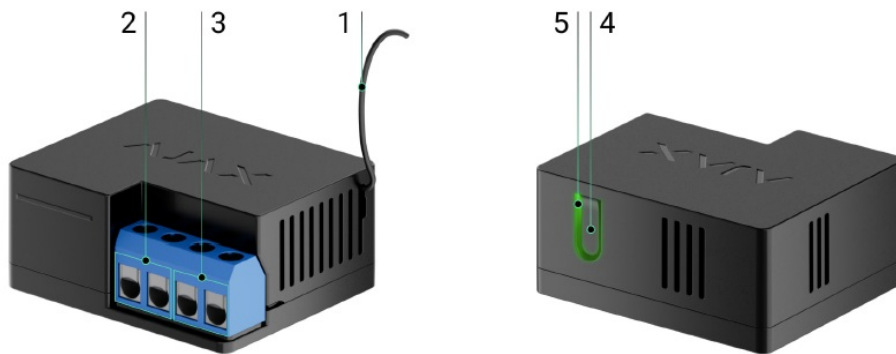


1. Antenna.
2. Power supply terminal block.
3. Terminal block to connect appliances.
4. Function button.
5. LED indicator.



- **PS IN terminals** — “+” and “-” connection terminals of a 7–24 V power supply.
- **Relay terminals** — output potential-free terminals of Relay contacts to connect appliances.

Operating principle

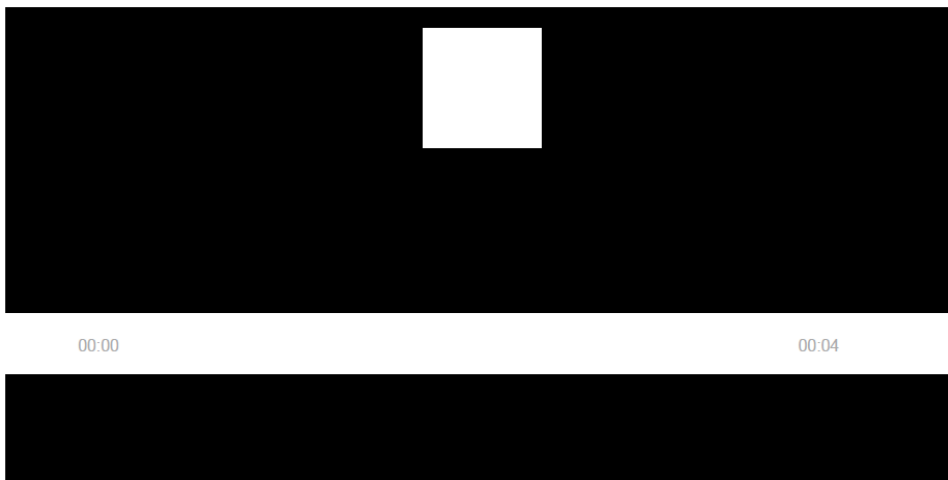


connected to this circuit. Relay is controlled via the device function button (by pressing and holding it for 2 seconds), the Ajax app, Button, and automation scenarios. Relay is powered by a 7–24 V power supply. Recommended power supply voltages: 12 V and 24 V. Relay features potential-free (dry) contacts. Dry contacts are electrically isolated to the relay's power supply. Thus, this device can be used in low voltage and household networks, for example, to simulate a button, a toggle switch, or to control water shut-off valves, electromagnetic locks, irrigation systems, gates, barriers, and other systems. Relay commutes one single pole of the electrical circuit. The relay can operate in bistable or pulse mode. In pulse mode, you can set its duration: from 0.5 to 255 seconds. The operating mode is selected by users or PRO with admin rights in the Ajax apps. A user or a PRO with admin rights can select the normal state of the relay contacts:

- **Normally closed** — the relay stops supplying power when activated and resumes when deactivated.
- **Normally open** — the relay supplies power when activated and stops when deactivated.

Relay measures supply voltage. This data, along with other operating parameters of the relay, is available in the device States. Relay states update frequency depends on the Jeweller or Jeweller/Fibra settings. The default value is 36 seconds. Relay maximum resistive load is 5 A at 36 V and 13 A at 230 V~.

Automation scenarios

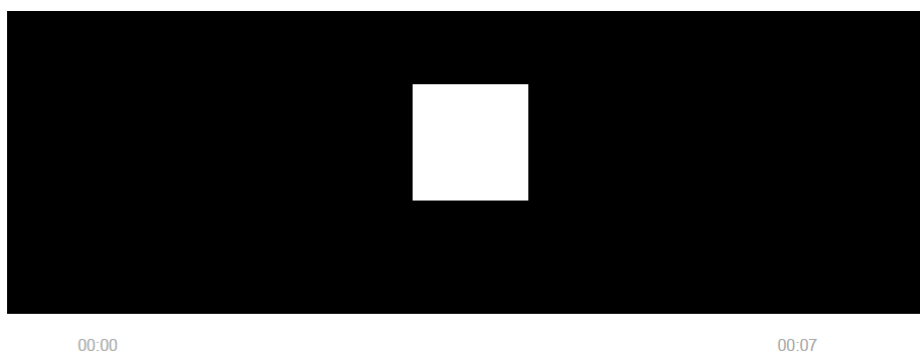


Ajax's scenarios offer a new level of security. With them, the security system not only notifies about threats, but also actively resists them.

Scenario types with Relay and examples of usage:

- **By alarm.** Lighting is switched on when an opening detector activates the alarm.
- **By security mode change.** The electric lock is automatically blocked when the object is armed.
- **By schedule.** The irrigation system in the yard is switched on according to the schedule at the specified time. Lighting and TV are switched on when the owners are away, so the house doesn't seem empty.

- **By pressing Button.** Switching on night lighting by pressing the smart button.
- **By temperature.** The heating is turned on when the temperature in the room is lower than 20°C.
- **By humidity.** The humidifier is switched on when the humidity level drops below 40%.
- **By CO₂ concentration.** Supply ventilation is turned on when the carbon dioxide concentration level exceeds 1000 ppm.

Control via the app

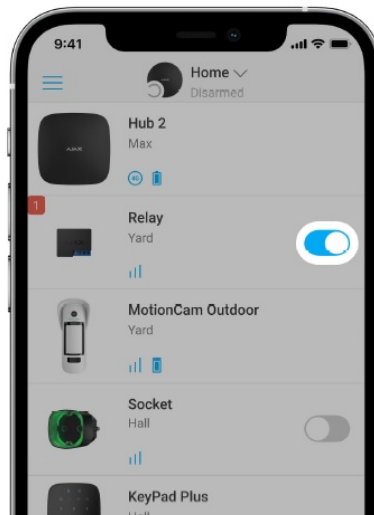

In Ajax apps , you can switch on and off electrical appliances connected to an electrical circuit controlled by Relay. Click the toggle in the Relay field in the Devices menu: the state of the relay contacts will change to the opposite, and the connected electrical device will switch off or on. This way, a security system user can remotely control the power supply, for example, for lighting or an electric lock.

Protection types

- Relay has two types of protection that operate independently: voltage and temperature.
- Voltage protection: is activated if the relay supply voltage exceeds the range of 6.5–36.5 V . Protects Relay from voltage surges.
- Temperature protection: is activated if the relay heats up to temperatures above 65°C. Protects relay from overheating.
- When voltage or temperature protection is activated, the power supply through Relay is stopped. Power supply resumes automatically when voltage or temperature parameter returns to normal.

Jeweller communication protocol

Relay uses the Jeweller radio protocol to transmit alarms and events. This wireless protocol provides fast and reliable two-way communication between the hub and connected devices.

Jeweller supports block encryption with a floating key and authentication of devices at each communication session to prevent sabotage and device spoofing. The protocol involves regular polling of devices by the hub at intervals of 12 to 300 seconds (set in the Ajax app) to monitor communication with all devices and display their statuses in the Ajax apps.

Sending events to the monitoring station

The Ajax security system can transmit alarms and events to the PRO Desktop monitoring app as well as the central monitoring station (CMS) via SurGard (Contact ID), SIA DC-09 (ADM-CID), ADEMC0 685, and other proprietary protocols.

Which CMSs Ajax hubs can be connected to

With PRO Desktop, the CMS operator receives all Relay events. In other cases, a monitoring station receives only notification about connection loss between Relay and the hub (or range extender). The addressability of Ajax devices allows sending not only events but also the type of the device, its assigned name, and room to PRO Desktop/CMS (the list of transmitted parameters may vary depending on the type of the CMS and the protocol selected for communication with the CMS).

Selecting the installation spot



A 39 × 33 × 18 mm device is connected to the circuit gap. Relay dimensions allow installing the device into the deep junction box, inside the electrical appliance enclosure, or in the distribution board. A flexible external antenna ensures stable communication. To install Relay on a DIN rail, we recommend using a DIN Holder. Relay should be installed in a place with a stable Jeweller signal strength of 2–3 bars. To roughly calculate the signal strength at the place of installation, use a radio communication range calculator. Use a radio signal range extender if the signal strength is less than 2 bars at the intended installation location.

Do not place Relay:

1. In rooms where the humidity and temperature indicators do not correspond to the operating parameters. This may damage the device or cause it to malfunction.
2. Near sources of radio interference: for example, at a distance of less than 1 meter from a router. This can lead to a loss of connection between Relay and the hub (or range extender).
3. In places with low or unstable signal strength. This can lead to a loss of connection between the relay and the hub (or range extender).

Installing



Before installing the relay, ensure that you have selected the optimal location and that it complies with the requirements of this manual. When installing and operating the device, follow the general electrical safety rules for using electrical appliances and the requirements of electrical safety regulations. It is recommended to use cables with a cross-section of 0.75–1.5 mm² (22–14 AWG). Relay should not be connected to circuits with more than 5 A load at 36 V and 13 A at 230 V~.

To install Relay:

1. If you install Relay on a DIN rail, fix DIN Holder on it first.
2. De-energize the power cable to which Relay will be connected.
3. Connect the “+” and “-” to the power supply terminal block of Relay.
4. Connect the Relay terminals for appliance connection to the circuit. We recommend using cables with a cross-section of 0.75–1.5 mm² (22–14 AWG).
5. When installing the device in a distribution box, lead the antenna out. The bigger the distance between the antenna and metal structures, the lower the risk of interfering with the radio signal.
6. Place the relay in DIN Holder. If the relay is not mounted on the DIN rail, we recommend securing the device with double-sided tape if it's possible.
7. Secure the cables if necessary.

Do not shorten or cut the antenna. Its length is optimal for operation in the Jeweller radio frequency range. After installing and connecting the relay, be sure to run the Jeweller Signal Strength Test and also test the overall operation of the relay: how it responds to commands and whether it controls the power of the devices.

Connecting

Before connecting the device

1. Install the Log in to your account or if you don't have one. Ajax app create a new account
2. Add a compatible hub to the app, configure the necessary settings, and create at least one virtual room
3. Ensure that the hub is on and has Internet access via Ethernet, Wi-Fi, and/or cellular network. You can do this in the Ajax app or by checking the hub LED indicator. It should light up white or green.
4. Ensure the hub is not armed and does not start updates by checking its status in the Ajax app.

To pair Relay with the hub

1. Connect Relay to a 7–24 V supply circuit if you haven't done this before.
2. Sign in to the Ajax app.
3. Select a hub if you have several of them or if you are using the PRO app.
4. Go to the Devices menu and click Add Device
5. Name the device, select the room, scan the QR code (can be found on the relay body and packaging), or type the device ID.




6. ClickAdd. The countdown will begin.
7. Press the Relay function button.

For the relay to connect, it must be within the range of the hub's radio coverage. If the connection fails, try again in 5 seconds. If the maximum number of devices is already added to the hub, you will get a notification about exceeding the device limit in the Ajax app when you try to add the relay. The maximum number of devices connected to the hub depends on the model.

Hub models and their differences

Relay works with one single hub; when connected to a new hub, it does not send notifications to the previous one. Once added to a new hub, Relay is not removed from the list of devices of the old hub. This has to be done in the Ajax app.

Malfunction counter

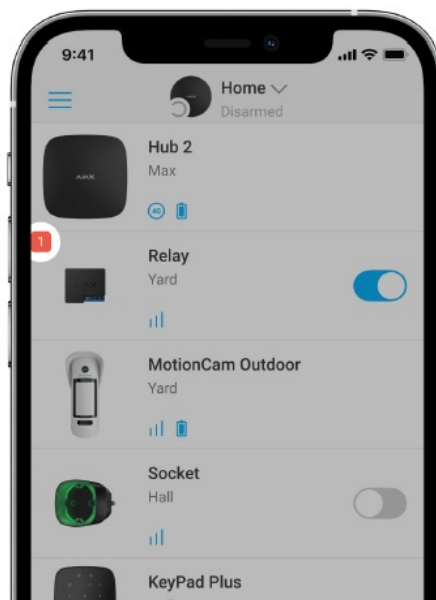





In case of Relay fault (e.g., no Jeweller signal between the hub and the relay), the Ajax app displays a malfunction counter in the upper-left corner of the device icon. Malfunctions are displayed in the relay. Fields with malfunctions will be highlighted in red.

Malfunction is displayed if:

- Temperature protection was activated.
- Voltage protection was activated.
- There is no connection between Relay and the hub (or radio signal range extender).

Icons

The icons display some Relay states. You can check them in the Ajax app in the Devices tab.

Icon	Meaning
	Jeweller signal strength between Relay and the hub or a radio signal range extender. The recommended value is 2–3 bars. Learn more
	The device is connected via a radio signal range extender . The field is not displayed if Relay works directly with the hub.
	Voltage protection was activated. Learn more
	Temperature protection was activated. Learn more

States

The states include information about the device and its operating parameters. Relay states are available in the Ajax app. To access them:

1. Go to the Devices tab.
2. Select Relay in the list.

Parameter	Meaning
Jeweller Signal Strength	<p>The signal strength of connection via Jeweller between the hub/range extender and the device. Recommended values: 2–3 bars.</p> <p>Jeweller is the protocol for transmitting events and alarms.</p> <p>Learn more about Jeweller</p>
Connection via Jeweller	<p>The state of connection via Jeweller between the hub/range extender and the device:</p> <p>Online — the relay is connected with the hub or the range extender.</p> <p>Offline — no connection with the hub or the range extender.</p>
ReX	<p>Displays the status of the device connection to the radio signal range extender:</p> <p>Online — the device is connected.</p> <p>Offline — no connection with the device.</p> <p>The field is displayed if the device is operated via the radio signal range extender.</p>
Active	<p>The relay state:</p> <p>Yes — relay contacts are closed. The connected electrical appliance is energized.</p> <p>No — relay contacts are open. No current is being supplied to the connected appliance.</p>

	The field is displayed if Relay operates in the bistable mode.
Voltage	<p>The current voltage value at the Relay input.</p> <p>The frequency of value updates depends on the Jeweller settings. The default value is 36 seconds.</p> <p>The voltage values are displayed in increments of 0.1 V.</p>
Deactivation	<p>Displays the state of the device permanent deactivation function:</p> <p>No — the device operates normally, responds to commands, runs scenarios, and transmits all events.</p> <p>Entirely — the device is excluded from the system operation. The device doesn't respond to commands, doesn't run scenarios, and doesn't transmit events.</p> <p>Learn more</p>
Firmware	Device firmware version.
Device ID	Device identifier. Also available via the QR code applied to the device body and packaging.
Device №	The number of the Relay loop (zone).

Settings

1. Go to the Devices tab.
2. Select Relay in the list.
3. Go to Settings by clicking on the gear icon.
4. Set the necessary parameters.
5. Click Back to save the new settings.

Settings	Meaning
Name	<p>Device name. It is displayed in notifications in the event feed, the list of hub devices, and SMS texts.</p> <p>Click on the pencil icon .</p> <p>The name can contain up to 12 Cyrillic characters or 24 Latin characters.</p>
Room	<p>Selecting the virtual room for Relay.</p> <p>The room name is displayed in SMS and notifications in the event feed.</p>
Notifications	<p>Selecting the relay notifications:</p> <p>When switched on/off — the user receives notifications from the device switching its state.</p> <p>When scenario executed — the user receives notifications about the execution of scenarios involving this device.</p> <p>The setting is available when the relay is connected to all hubs (except for the Hub model) with firmware version OS Malevich 2.15 or higher and in apps of the following versions or higher:</p> <p>Ajax Security System 2.23.1 for iOS Ajax Security System 2.26.1 for Android</p> <p>Ajax PRO: Tool for Engineers 1.17.1 for iOS</p> <p>Ajax PRO: Tool for Engineers 1.17.1 for Android</p> <p>Ajax PRO Desktop 3.6.1 for macOS Ajax PRO Desktop 3.6.1 for Windows</p>

User Guide	Opens the Relay User Manual in the Ajax app.
Deactivation	<p>Allows disable the device without removing it from the system.</p> <p>Two options are available:</p> <p>No — the device operates normally, responds to commands, runs scenarios, and transmits all events.</p> <p>Entirely — the device is excluded from the system operation. The relay doesn't respond to commands, doesn't run scenarios, and doesn't transmit events.</p> <p>After deactivation, Relay will keep the previous state: active or inactive.</p> <p>Learn more</p>
Unpair Device	Remove Relay from a hub and delete its settings.

Indication



Relay LED indicator flashes periodically if the device is not connected to the hub. When you press the Relay function button, the LED indicator lights up green.

Functionality testing

Relay functionality tests do not begin immediately but not later than over a single hub—device polling interval (36 seconds with default Jeweller or Jeweller/Fibra settings). You can change the device polling period in the Jeweller or Jeweller/Fibra menu in the hub settings.

To run a test in the Ajax app:

1. Select the hub if you have several of them or if you are using the PRO app.
2. Go to the Devices tab.
3. Select Relay.
4. Go to Settings.
5. Select and run the Jeweller Signal Strength Test.

Maintenance

The device requires no technical maintenance.

Technical specifications

Actuating element	Electromagnetic relay
Number of switchings	≥ 200,000
Supply voltage range	7 – 24 V
Voltage protection	Minimum — 6.5 V Maximum — 36.5 V
Maximum load current	5 A at 24 V 13 A at 230 V~
Operating mode	Pulse or bistable
Pulse duration	0.5 to 255 s
Maximum current protection	No
Parameter control	Voltage

Energy consumption in standby mode	Up to 1 W
Radio communication protocol	Jeweller Learn more

Radio frequency band	866.0 – 866.5 MHz 868.0 – 868.6 MHz 868.7 – 869.2 MHz 905.0 – 926.5 MHz 915.85 – 926.5 MHz 921.0 – 922.0 MHz Depends on the sales region.
Compatibility	All Ajax hubs and radio signal range extenders
Maximum radio signal strength	Up to 25 mW
Radio signal modulation	GFSK
Radio signal range	1,000 m (in an open space) Learn more
Polling interval	12–300 s (36 s by default)
Protection class	IP20
Operating temperature range	-20°C to +64°C
Maximum temperature protection	Over +65°C at the place of installation Over +85°C inside Relay
Operating humidity	Up to 85% with no condensation
Dimensions	39 × 33 × 18 mm
Cross-sectional area of the cable	0.75–1.5 mm ² (22–14 AWG)
Weight	25 g
Service life	10 years

Compliance with standards

Complete set

1. Relay.
2. Double-sided tape.
3. Quick Start Guide.


Warranty

Warranty for the Limited Liability Company “Ajax Systems Manufacturing” products is valid for 2 years after the purchase. If the device does not function correctly, please contact the Ajax TechnicalSupport first. In most cases, technical issues can be resolved remotely.

Contact Technical Support:

- e-mail
- Telegram
- Phone number: 0 (800) 331 911

Documents / Resources

	<p>AJAX 11035 Wireless Low Voltage Relay [pdf] User Manual 11035, 11035 Wireless Low Voltage Relay, Wireless Low Voltage Relay, Low Voltage Relay, Voltage Relay, Relay</p>
---	---

References

- [Connecting Ajax to CMS](#)
- [End user agreement - Ajax Systems](#)
- [Hub Differences | Ajax Security System](#)
- [PRO Desktop | Ajax Systems](#)
- [Security system control panels | Ajax Systems](#)
- [Signal range extenders in the security system | Ajax Systems](#)
- [Relay — Low current remote control relay with dry contact](#)
- [What affects the quality of radio communication between Ajax devices](#)
- [What affects the quality of radio communication between Ajax devices](#)
- [Automation scenarios | Your Ajax security automation](#)
- [Software | Ajax Systems](#)
- [Warranty - Ajax Systems](#)
- [How to create the Ajax account? | Ajax Systems Support](#)
- [How Ajax encrypts communication between the hub and system detectors | Ajax Systems Support](#)
- [How to deactivate a device without removing it from the system | Ajax Systems Support](#)
- [Jeweller radio protocol: technology and capabilities | Ajax Systems Support](#)
- [Button user manual | Ajax Systems Support](#)
- [LifeQuality Jeweller User manual | Ajax Systems Support](#)
- [How to create and configure a scenario in the Ajax system | Ajax Systems Support](#)
- [What is Jeweller Signal Strength Test | Ajax Systems Support](#)
- [support.ajax.systems/wp-content/uploads/2022/06/relay-1-1.jpg](#)
- [User Manual](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.