TOTO THU773#01-A

TOTO THU773#01-A Drake 1G Toilet Trip Lever Instruction Manual

Model: THU773#01-A

1. Introduction

This manual provides detailed instructions for the installation, operation, and maintenance of your TOTO THU773#01-A Drake 1G Close Coupled Toilet Trip Lever. This component is designed for TOTO Drake 1G toilets, ensuring efficient 1.0 and 0.8 GPF (Gallons Per Flush) operation. Please read these instructions thoroughly before beginning installation to ensure proper function and longevity of the product.

2. Safety Information

- Always turn off the water supply to the toilet before performing any installation or maintenance.
- Wear appropriate personal protective equipment, such as gloves, when handling plumbing components.
- Ensure all connections are secure to prevent leaks.
- If you are unsure about any step, consult a qualified plumber.

3. Package Contents

Your package should contain the following item:

- TOTO THU773#01-A Drake 1G Toilet Trip Lever (Cotton finish)

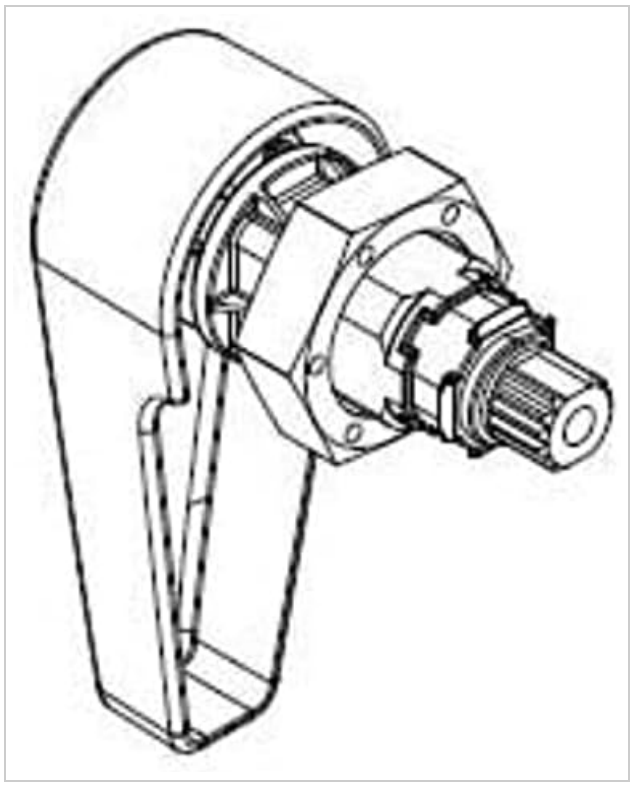


Figure 1: An illustration showing the TOTO THU773#01-A toilet trip lever assembly, including the handle, mounting nut, and internal mechanism.

4. Installation Instructions

Follow these steps to install or replace your TOTO THU773#01-A trip lever:

1. **Prepare the Toilet:** Locate the water supply valve behind the toilet and turn it clockwise until the water flow stops completely. Flush the toilet to empty the tank.
2. **Remove Old Trip Lever (if applicable):** Open the toilet tank lid. Disconnect the flapper chain from the existing trip lever arm. Unscrew the mounting nut from the inside of the tank that secures the old trip lever. Carefully remove the old trip lever from the toilet tank.
3. **Install New Trip Lever:** Insert the new TOTO THU773#01-A trip lever through the hole in the front of the toilet tank. Ensure the handle is facing outwards and the lever arm is inside the tank.
4. **Secure the Trip Lever:** From inside the tank, thread the mounting nut onto the trip lever shaft. Hand-tighten the nut firmly. Do not overtighten, as this can damage the tank or lever.
5. **Connect the Flapper Chain:** Attach the flapper chain to the hole on the end of the new trip lever arm. Adjust the chain length so there is a slight amount of slack when the flapper is closed. Too much tension will prevent the flapper from sealing, and too much slack will result in a weak flush.
6. **Restore Water Supply and Test:** Slowly turn the water supply valve counter-clockwise to restore water flow to the toilet tank. Allow the tank to fill completely. Flush the toilet several times to ensure proper operation and check for any leaks around the trip lever connection. Adjust the flapper chain if necessary.

5. Operation

To flush the toilet, simply press down on the TOTO THU773#01-A trip lever handle. This action lifts the flapper, allowing water to flow from the tank into the bowl. Release the handle once the flush cycle begins. The 1G (1.0 & 0.8 GPF) system is designed for efficient water usage.

6. Maintenance

Regular maintenance helps ensure the longevity and proper function of your trip lever:

- **Cleaning:** Clean the exterior of the trip lever handle with a soft cloth and mild, non-abrasive cleaner. Avoid harsh chemicals that could damage the finish.
- **Check for Wear:** Periodically inspect the connection between the trip lever arm and the flapper chain. Ensure the chain is not corroded or tangled.
- **Tightness:** If the trip lever feels loose, gently tighten the mounting nut inside the tank. Do not overtighten.

7. Troubleshooting

Problem	Possible Cause	Solution
Weak Flush	Flapper chain too long or disconnected.	Adjust the flapper chain to have minimal slack. Reconnect if detached.
Toilet Runs Continuously	Flapper chain too short, preventing flapper from sealing.	Lengthen the flapper chain slightly to allow the flapper to close completely.
Loose Handle	Mounting nut is loose.	Tighten the mounting nut inside the tank by hand.

8. Specifications

Model Number: THU773#01-A

Brand: TOTO

Material: Cotton (finish)

Color: Cotton

Product Dimensions: 5 x 3 x 1.5 inches

Item Weight: 2.46 ounces

Special Feature: Easy to Install

Compatibility: TOTO Drake 1G Toilets (1.0 & 0.8 GPF)

9. Warranty and Support

TOTO products are manufactured to high-quality standards. For specific warranty information, please refer to the documentation included with your original toilet purchase or visit the official TOTO website. For technical assistance or to inquire about replacement parts, please contact TOTO customer support directly. You can find contact information on the TOTO Store on Amazon or the official TOTO website.

© 2023 TOTO. All rights reserved. Information subject to change without notice.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question