Manuals+

Q & A | Deep Search | Upload

manuals.plus /

- > ELEGANT /
- > ELEGANT Corner Shower Enclosure 34x34x72 Black Framed Instruction Manual

ELEGANT BL-343472GD

ELEGANT Corner Shower Enclosure Instruction Manual

Model: BL-343472GD (34 in. D x 34 in. W x 72 in. H, Black Framed)

1. Introduction

This manual provides comprehensive instructions for the safe installation, operation, and maintenance of your ELEGANT Corner Shower Enclosure. Please read all instructions carefully before beginning installation to ensure proper assembly and safe use. Retain this manual for future reference.



Image 1.1: ELEGANT Corner Shower Enclosure (34x34x72, Black Framed) installed in a bathroom setting.

2. SAFETY INFORMATION

WARNING: Installation of this product requires two or more people due to the weight and size of the glass panels. Failure to follow these safety instructions may result in personal injury or product damage.

- Always wear safety glasses during installation.
- Handle glass panels with extreme care. Tempered glass, while strong, can shatter if struck at the edges or corners.
- Ensure the installation surface (walls, floor) is structurally sound and level.
- Use appropriate tools and hardware for installation.
- Professional installation is recommended for optimal safety and performance.
- Do not use abrasive cleaners or tools that could scratch the glass or frame finish.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation. If any parts are missing or damaged, contact ELEGANT customer support.

- Tempered Glass Panels (2 fixed, 2 sliding doors)
- · Aluminum Wall Profiles
- Top and Bottom Guide Rails
- Sliding Door Rollers (Top and Bottom)
- Door Handles
- · Waterproof Seal Strips
- Mounting Hardware (Screws, anchors, gaskets)

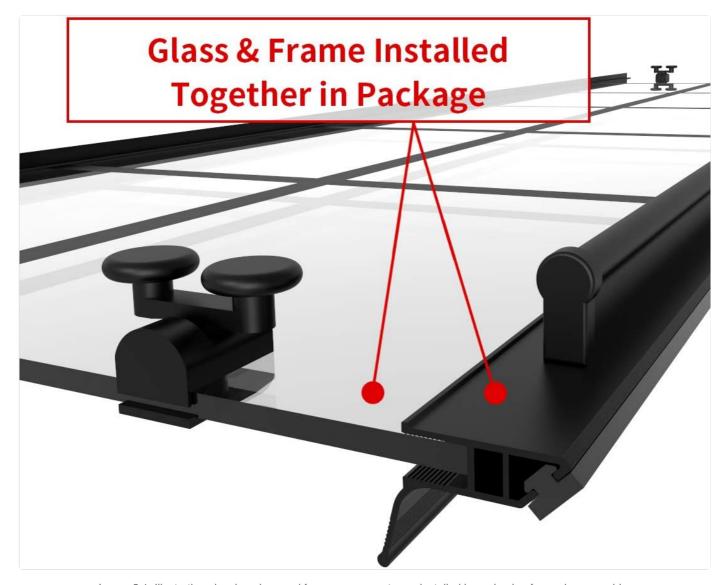


Image 3.1: Illustration showing glass and frame components pre-installed in packaging for easier assembly.

4. Specifications

Feature	Detail	
Model Number	BL-343472GD	
Dimensions (D x W x H)	34 in. x 34 in. x 72 in.	
Glass Thickness	1/4 inch (6mm) Clear Tempered Glass	

Frame Finish	Black Framed
Door Type	Double Sliding
Walk-in Opening	18 in.
Material	Aluminum, Tempered Glass
Assembly Required	Yes
Certifications	ANSI Z97.1 Certified Glass

5. SETUP AND INSTALLATION

Before starting, ensure you have all necessary tools (e.g., drill, level, measuring tape, screwdriver, caulk gun, silicone sealant) and that your shower base or curb is properly installed and level.

5.1. Pre-Installation Checks

- 1. Unpack all components and inspect for damage.
- 2. Confirm wall study or blocking are present in the installation area for secure mounting.
- 3. Measure the shower opening to ensure it matches the enclosure dimensions.

5.2. Wall Profile Installation

- 1. Position the aluminum wall profiles against the finished walls at the desired height. Use a level to ensure they are perfectly vertical.
- 2. Mark the drilling points through the pre-drilled holes in the profiles.
- 3. Drill holes and insert wall anchors (if necessary).
- 4. Secure the wall profiles to the walls using the provided screws. The design allows for up to 20mm (approximately 0.78 inches) of adjustment on each side for out-of-plumb walls.



Image 5.2.1: Detail showing the 20mm adjustment capability of the wall profiles for accommodating uneven walls.

5.3. Fixed Glass Panel Installation

- 1. Carefully insert the fixed glass panels into the installed wall profiles and the bottom guide rail.
- 2. Ensure the glass is seated firmly and evenly.
- 3. Secure the fixed panels using the appropriate fasteners as indicated in the detailed diagram.

5.4. Sliding Door Assembly

- 1. Attach the rollers to the top and bottom of the sliding glass doors. Ensure rollers are securely fastened and move freely.
- 2. Install the door handles onto the sliding glass panels.



Image 5.4.1: Step 1 of roller installation, showing attachment to the glass panel.



Image 5.4.2: Step 2 of roller installation, showing the roller secured to the glass.

5.5. Sliding Door Installation

- 1. Carefully lift and place the assembled sliding doors onto the top and bottom guide rails. Ensure the rollers engage smoothly with the tracks.
- 2. Test the sliding motion of both doors to ensure they operate freely and meet correctly in the corner.



Image 5.5.1: Detail of the bottom guide rail, illustrating how the sliding door rollers engage with the track.

5.6. Waterproof Seal Installation

- 1. Install the provided waterproof seal strips along the edges of the glass panels and where the doors meet. These seals are designed to prevent water leakage.
- 2. Apply a continuous bead of silicone sealant along the exterior base of the enclosure where it meets the shower base or curb, and along the exterior vertical joints where the wall profiles meet the walls.
- 3. Allow the sealant to cure completely (typically 24-48 hours) before using the shower.



Image 5.6.1: Close-up view of the black waterproof seal strips designed to prevent water leakage.

6. OPERATING INSTRUCTIONS

The ELEGANT Corner Shower Enclosure features double sliding doors for convenient access. To open, gently slide either door along its track. To close, slide the doors until they meet in the corner, where they will be held in place by magnetic seals.

- Avoid forcing the doors if they encounter resistance. Inspect the tracks for obstructions.
- Do not hang heavy objects from the door handles or frame.

7. MAINTENANCE

Regular cleaning and maintenance will ensure the longevity and appearance of your shower enclosure.

- Glass Cleaning: Clean glass panels regularly with a soft cloth and a non-abrasive glass cleaner. Avoid cleaners containing harsh chemicals, abrasives, or scouring pads, as these can damage the glass or protective coatings.
- Frame Cleaning: Wipe down aluminum profiles with a soft, damp cloth. For stubborn spots, use a mild, non-

abrasive cleaner.

- Seal Inspection: Periodically check the waterproof seal strips for wear or damage. Replace if necessary to prevent leaks.
- Roller and Track Maintenance: Keep the top and bottom tracks free of soap scum, hair, and debris to ensure smooth door operation. Clean rollers with a small brush if needed.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution	
Water leakage	 Improperly applied silicone sealant Damaged or misaligned seal strips Loose connections 	 Reapply silicone sealant to all exterior joints. Inspect and adjust/replace seal strips. Tighten all screws and connections. 	
Doors do not slide smoothly	Debris in tracksDamaged or worn rollersMisaligned doors	 Clean tracks thoroughly. Inspect rollers for damage; replace if necessary. Adjust door alignment. 	
Doors do not close completely		Adjust door alignment.Clear tracks.Inspect and adjust/replace magnetic seals.	

9. WARRANTY AND CUSTOMER SUPPORT

ELEGANT products are manufactured to high-quality standards. For warranty information or assistance with parts, installation, or troubleshooting, please contact ELEGANT customer support. Our service representatives are available to assist you with any questions.

Please have your model number (BL-343472GD) and purchase date available when contacting support.

© 2025 ELEGANT. All rights reserved.

Related Documents - BL-343472GD



Sterownik Schodowy F40 - Instrukcja Obsługi i Konfiguracji

Szczegółowa instrukcja obsługi i konfiguracji sterownika schodowo-korytarzowego F40 firmy ELEGANT, przeznaczonego do sterowania taśmami LED RGB, RGBW i CCT, wraz ze schematami połączeń.



LIVIZA BL Series Shower Door Installation Manual

Installation manual for the LIVIZA BL Series shower door, providing detailed steps, parts list, and maintenance information for safe and proper assembly.



Streamline CRYSTALTECH™ Treated Glass Shower Door Installation Manual

Comprehensive installation manual for the Streamline CRYSTALTECH™ Treated Glass Shower Door, Model DSD-3480-240-BL. Includes safety precautions, tools required, parts list, step-by-step installation instructions, product care, and warranty information.



Streamline CRYSTALTECH Treated Glass Shower Door Installation Manual

Comprehensive installation manual for Streamline CRYSTALTECH Treated Glass Shower Doors, including safety precautions, tools required, parts list, step-by-step installation instructions, product care, and warranty information. Models DSD-3436-229-BL and DSD-3440-230-CH.



LIVIZA BL Series Shower Door Installation Manual

Comprehensive installation guide for the LIVIZA BL Series shower door and enclosure, including tools required, step-by-step assembly instructions, and product maintenance tips.



TLDS01 Sliding Shower Door Installation Manual

This manual provides step-by-step instructions for the installation of the TLDS01 sliding shower door, including parts list, assembly diagrams, and care instructions.