

[manuals.plus](#) /› [FORIOUS](#) /› [FORIOUS FB-03106G Brushed Gold Bathroom Faucet Instruction Manual](#)**FORIOUS FB-03106G**

FORIOUS FB-03106G Brushed Gold Bathroom Faucet Instruction Manual

Model: FB-03106G

1. PRODUCT OVERVIEW

The FORIOUS FB-03106G Brushed Gold Bathroom Faucet is a single-handle, single-hole lavatory faucet designed for modern bathrooms. It features a durable stainless steel construction with a 5-layer brushed gold finish, offering resistance to corrosion and fingerprints. The faucet includes a ceramic disc cartridge for smooth, drip-free operation and a water-saving aerator.



Corrosion
Resistance



Anti-
Fingerprint



Image 1.1: The FORIOUS Brushed Gold Bathroom Faucet, showcasing its elegant design and key features like corrosion resistance and anti-fingerprint finish.



Image 1.2: An internal view of the faucet, demonstrating the ceramic cartridge and design elements that contribute to leak prevention, smooth handling, and overall stability.

2. SAFETY INFORMATION

- Always turn off the main water supply before beginning installation or maintenance.
- Wear appropriate personal protective equipment, such as safety glasses and gloves, during installation.
- Ensure all connections are tight to prevent leaks, but do not overtighten.
- If you are unsure about any step, consult a qualified plumber.
- This faucet is certified to NSF/ANSI Standard 61, ensuring no lead compliance.

3. PACKAGE CONTENTS

Verify that all components are present before starting installation:

- Faucet Body
- Hot & Cold Supply Lines (24" braided stainless steel, 3/8" thread)
- Metal Pop-up Drain
- Deck Plate (6.29-inch, suitable for 1 or 3 holes)
- Mounting Hardware (Fixed Hardwares, Gaskets, Nuts)

- Instruction Manual
- Aerator

4. SPECIFICATIONS

Feature	Detail
Brand	FORIOUS
Model Name	FB-03106G
Material	Stainless Steel
Finish Type	Brushed Gold
Mounting Type	Protruding, Single Hole (with deck plate for 1 or 3 holes)
Number of Handles	1
Maximum Flow Rate	1.2 GPM (4.5 L/min) at 60 PSI
Spout Height	3.54 Inches
Spout Reach	5.13 Inches
Hose Length	24 Inches
Product Dimensions	2.56"D x 6.5"W x 7.28"H
Item Weight	2.66 pounds

PRODUCT SIZE

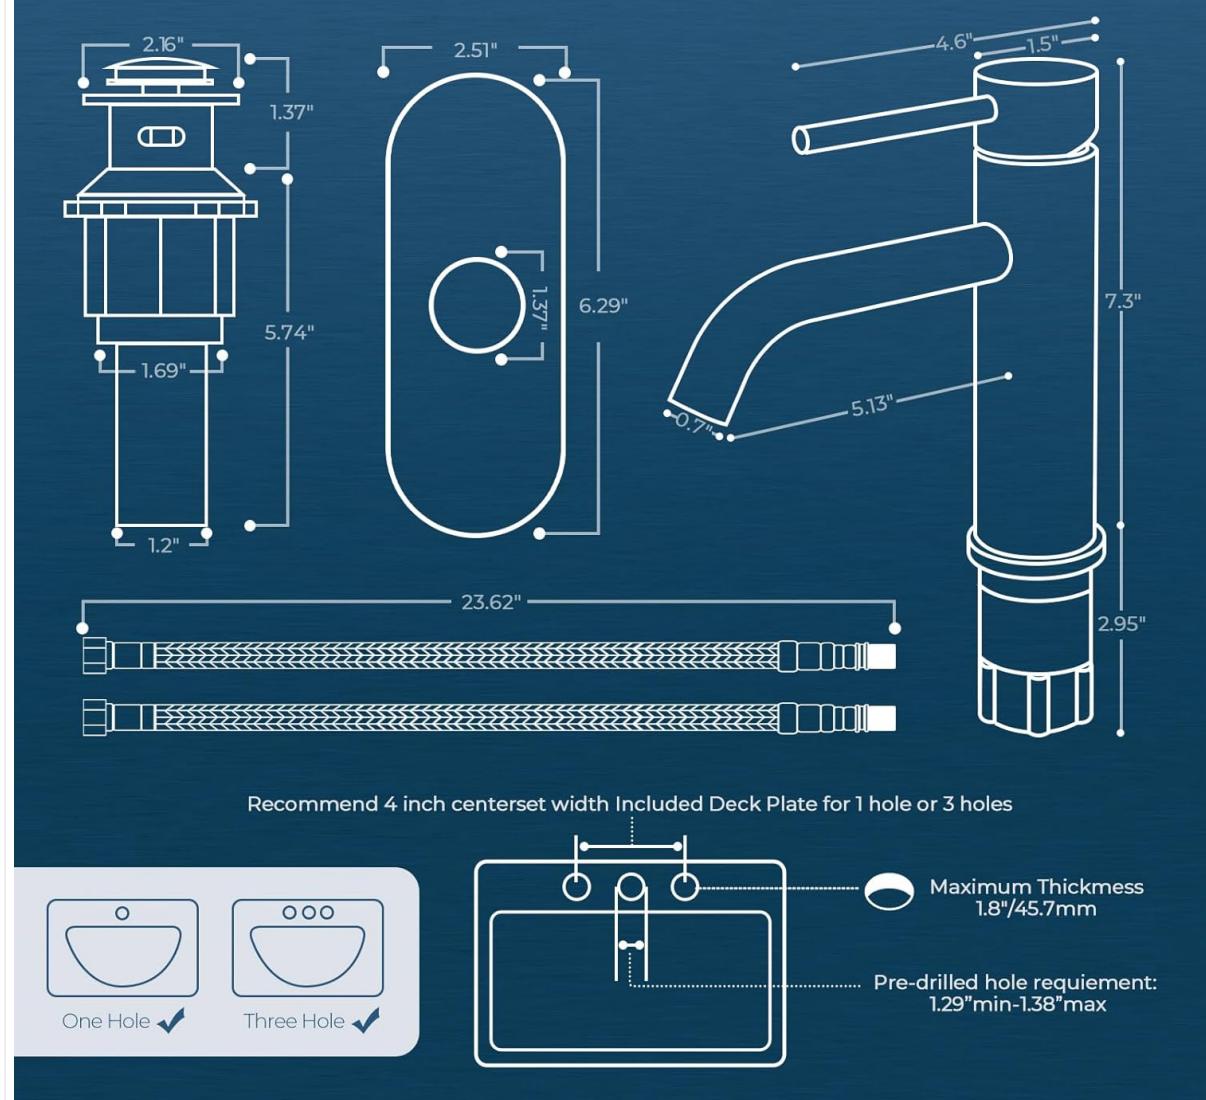


Image 4.1: Detailed product dimensions and sink hole compatibility for installation planning.

5. SETUP (INSTALLATION)

Follow these steps for proper installation of your FORIOUS bathroom faucet. Refer to the installation video for visual guidance.

5.1 Pre-Installation

- Ensure the installation area on your countertop is clean and free of debris.
- Turn off the main water supply to your bathroom.
- Gather all necessary tools (adjustable wrench, screwdriver, plumber's putty or silicone sealant).

5.2 Installation Steps

1. **Prepare the Faucet:** Connect the cold and hot water supply lines to the faucet body. Ensure they are hand-tightened, then use a wrench for a quarter turn.
2. **Install Deck Plate (if needed):** If your sink has three holes, place the deck plate over the holes. For a single-hole sink, the deck plate is optional.
3. **Position the Faucet:** Place the faucet body onto the countertop, ensuring the supply lines and mounting rod pass through the sink hole(s).

- Secure the Faucet:** From underneath the countertop, slide the rubber washer, metal washer, and mounting nut onto the mounting rod. Hand-tighten the nut, then use a screwdriver to securely fasten the mounting screws.
- Connect Water Supply:** Connect the other end of the hot and cold supply lines to the corresponding hot and cold water valves. Use an adjustable wrench to tighten the connections.
- Install Pop-up Drain:** Follow the separate instructions provided for installing the metal pop-up drain. Ensure a watertight seal using plumber's putty or silicone sealant as recommended.
- Test for Leaks:** Slowly turn on the main water supply. Check all connections for leaks. If leaks occur, tighten the connections slightly until they stop.



Image 5.1: The included 24-inch braided stainless steel supply hoses, featuring double sealing rings for secure connections.

5.3 Installation Video Guide

Video 5.2: Official FORIOUS Bathroom Sink Faucet Installation Guide. This video provides a step-by-step visual walkthrough of the installation process.

6. OPERATING INSTRUCTIONS

The FORIOUS FB-03106G faucet features a single handle for easy control of water flow and temperature.

- **Turn On/Off:** Lift the handle upwards to turn on the water. Push the handle downwards to turn off the water.
- **Adjust Water Flow:** The further you lift the handle, the greater the water flow.
- **Adjust Temperature:** Move the handle to the left for hot water and to the right for cold water. The handle has red (hot) and blue (cold) indicators for guidance.



Image 6.1: The single handle control with clear hot (red) and cold (blue) indicators for precise temperature adjustment.

7. MAINTENANCE

Regular cleaning and maintenance will ensure the longevity and optimal performance of your faucet.

- **Cleaning the Finish:** Clean the faucet regularly with a soft cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the brushed gold finish.
- **Aerator Cleaning:** If water flow decreases or becomes irregular, the aerator may be clogged. Unscrew the aerator from the spout, clean any debris or mineral deposits, and rinse thoroughly before reattaching.
- **Leak Checks:** Periodically check under the sink for any signs of leaks around the connections. Tighten any loose connections as needed.

SUPERIOR AERATOR

1.2 GPM at 60PSI



Image 7.1: The faucet's aerator, designed for smooth water flow and to minimize splashing, which can be removed for cleaning.

8. TROUBLESHOOTING

If you encounter any issues, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Low Water Flow	Clogged aerator; partially closed water supply valve.	Clean the aerator (see Maintenance section); ensure water supply valves are fully open.
Leaking from Faucet Base	Loose mounting nut; improper sealing.	Tighten the mounting nut from underneath the sink; ensure proper use of plumber's putty or silicone during installation.
Leaking from Supply Lines	Loose connections; damaged O-rings.	Tighten supply line connections; replace O-rings if damaged.
Water Temperature Not Adjusting	Improperly connected hot/cold lines; faulty cartridge.	Verify hot and cold lines are connected correctly; contact support for cartridge replacement if necessary.

9. WARRANTY AND SUPPORT

FORIOUS offers a **lifetime warranty** on this product, covering defects in material and workmanship under normal use. For warranty claims, technical assistance, or replacement parts, please contact FORIOUS customer support.

Customer Support: Refer to the contact information provided on the FORIOUS official website or your purchase documentation.