



[Manuals.plus](#) /

> [Stacool](#) /

> Stacool Center Console Latch Replacement Instruction Manual for Honda Civic (2006-2011)

Stacool Center Console Latch

Stacool Center Console Latch Replacement Instruction Manual

Compatible with Honda Civic 2006-2011 (OEM# 83451-SNA-A01ZA)

1. INTRODUCTION

This manual provides instructions for the installation and maintenance of the Stacool Center Console Latch Replacement. This product is designed as a direct replacement for the original center console latch in specific Honda Civic models.

1.1. Compatibility

- OEM Part Number: **83451-SNA-A01ZA**
- Compatible with Honda Civic models: **2006, 2007, 2008, 2009, 2010, 2011**

Please verify the OEM number and vehicle compatibility before proceeding with installation.

2. PRODUCT SPECIFICATIONS

Item	Detail
Product Name	Center Console Latch Replacement
Material	Plastic
Color	Black
Dimensions (L x W x H)	3.07 x 1.62 x 1.40 inches
Weight	0.80 ounces

PRODUCT SIZE

OEM# 83451-SNA-A01ZA

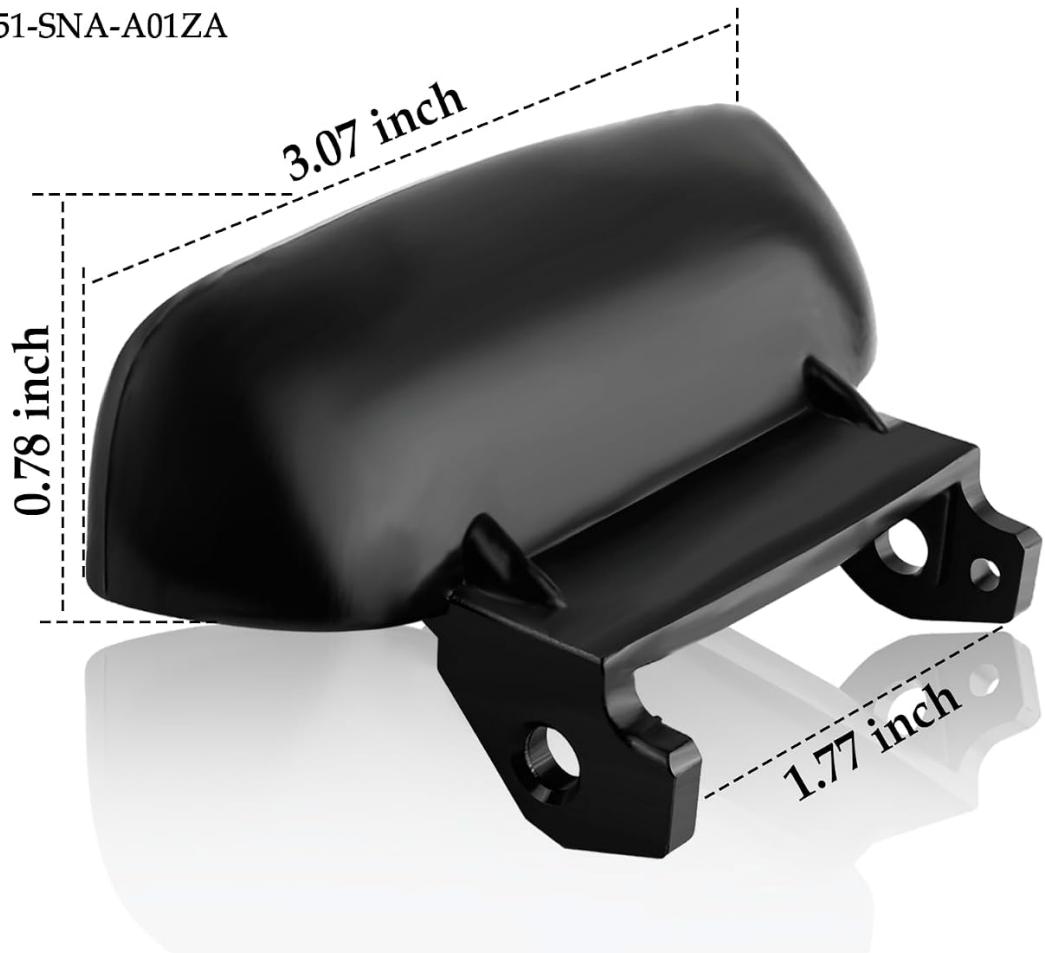


Figure 1: Dimensions of the Center Console Latch. This image illustrates the key dimensions of the replacement center console latch: 3.07 inches in length, 0.78 inches in height, and 1.77 inches in width at the base.

3. PACKAGE CONTENTS

- 1 x Stacool Center Console Latch Replacement

Note: The original spring and mounting bar are not included with this replacement latch. These components must be retained from your existing console latch for installation.

4. INSTALLATION INSTRUCTIONS

The installation process is designed to be straightforward and can typically be completed in minutes. No specialized tools are generally required beyond basic hand tools (e.g., a screwdriver).



Compatible with Honda 2006-2011 Civic

CENTER CONSOLE LATCH



Figure 2: Latch location in Honda Civic center console. This image demonstrates the location where the center console latch is installed within the armrest of a Honda Civic, indicating its function in securing the lid.

1. **Prepare the Console:** Open the center console lid. Depending on your specific Honda Civic model and trim, you may need to remove a cover panel or a few screws to access the existing latch mechanism. Refer to your vehicle's service manual if you are unsure how to access the latch.
2. **Remove the Old Latch:** Carefully detach the broken or old center console latch. Pay close attention to how the original spring and mounting bar are positioned. These components are essential for the new latch.
3. **Transfer Components:** Remove the spring and mounting bar from the old latch.
4. **Install New Latch:** Align the new Stacool Center Console Latch Replacement with the mounting holes. Insert the original spring and mounting bar into the designated slots on the new latch. Ensure they are securely seated.
5. **Secure the Latch:** Fasten the new latch into place using the original screws or clips. Ensure the latch is firm and does not wobble.
6. **Test Functionality:** Close and open the center console lid several times to confirm that the new latch engages properly and holds the lid securely.
7. **Reassemble:** If any panels or screws were removed to access the latch, reattach them.

PRODUCT DISPLAY

Sturdy and Durable, Long Service Life



Figure 3: Various product views. Various angles of the black plastic center console latch, highlighting its design and attachment points.

5. OPERATING THE LATCH

The center console latch operates identically to the original part. To open the console, press the release button or lever on the console lid. To close, simply lower the lid until the latch engages with an audible click, securing the console compartment.

6. MAINTENANCE

The Stacool Center Console Latch Replacement is constructed from durable plastic designed for long-term use. No specific maintenance is required. If the latch accumulates dust or debris, wipe it clean with a soft, damp cloth. Avoid using harsh chemicals or abrasive cleaners, as these may damage the plastic finish.

7. TROUBLESHOOTING

- **Latch does not engage or release smoothly:**
 - Ensure the original spring and mounting bar are correctly installed and not bent or damaged.
 - Verify that the latch is properly aligned with the console's strike plate.

- Check for any obstructions preventing the latch from moving freely.

- **Lid does not stay closed:**

- Confirm the latch is fully seated and secured with all fasteners.
- Inspect the strike plate on the console body for damage or misalignment.

8. WARRANTY AND SUPPORT

Stacool products are manufactured to high-quality standards. For any issues or support needs, please contact the retailer or manufacturer directly. Keep your purchase receipt for warranty claims, if applicable.