

FORIOUS FB-61036B

FORIOUS FB-61036B Matte Black Centerset Bathroom Faucet

Instruction Manual

1. INTRODUCTION

Thank you for choosing the FORIOUS FB-61036B Matte Black Centerset Bathroom Faucet. This manual provides essential information for the safe and efficient installation, operation, and maintenance of your new faucet. Please read these instructions thoroughly before installation and keep them for future reference. This faucet features a durable matte black finish, two handles for precise temperature and flow control, and a 360-degree swivel spout for enhanced usability. It is designed for 4-inch centerset bathroom sinks with 2 or 3 holes.

2. SAFETY INFORMATION

- Always turn off the main water supply before beginning any installation or repair work.
- Wear appropriate personal protective equipment, such as safety glasses, during installation.
- Ensure all connections are tight to prevent leaks. Do not overtighten.
- This faucet is certified to cUPC and NSF 61 Lead-free Standards, ensuring safe drinking water.
- If you encounter any difficulties, consult a qualified plumber.

3. PACKAGE CONTENTS

Verify that all components are present before starting installation:

- Faucet Body with Spout and Handles
- Pop-up Drain Assembly with Built-in Strainer
- Hot and Cold Water Supply Hoses (Nylon Braided, 24 inches)
- Mounting Hardware (Gaskets, Washers, Fixing Nuts)

- Aerator (Pre-installed, removable)
- Instruction Manual

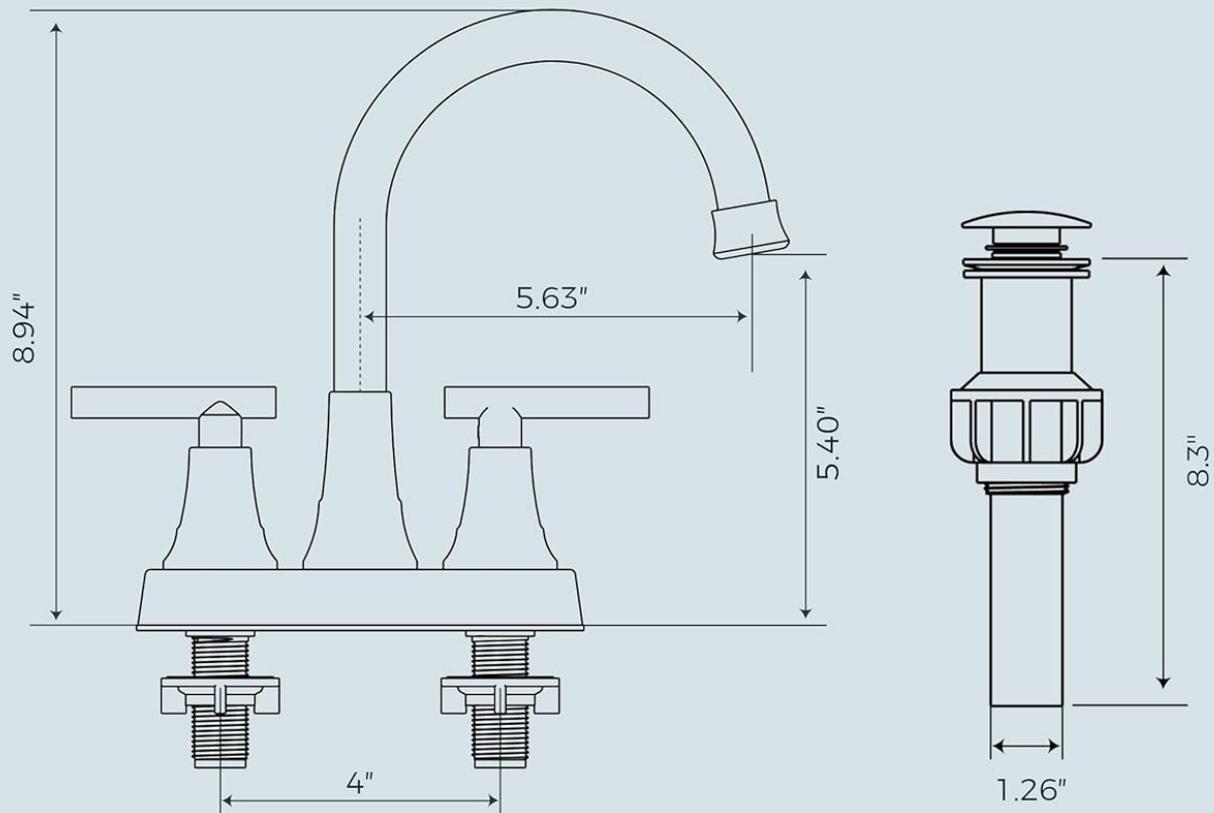


Image: All necessary parts included for installation, such as the faucet body, handles, hoses, and pop-up drain.

4. SPECIFICATIONS

Feature	Detail
Brand	FORIOUS

Feature	Detail
Model Name	FB-61036B
Finish Type	Matte Black
Material	Stainless Steel, ABS
Mounting Type	Deck Mount
Installation Type	Centerset
Number of Handles	2
Hole Count	3
Spout Height	5.4 Inches
Spout Reach	4.8 Inches
Special Features	360° Swivel, Lead Free, Leak Resistant, Pop Up Drain, Water Saving System
Maximum Flow Rate	1.8 Gallons Per Minute (1.2 GPM with aerator)
Hose Length	24 Inches
Certifications	cUPC, NSF 61 Lead-free Standards



WILL THIS FIT MY SINK ?

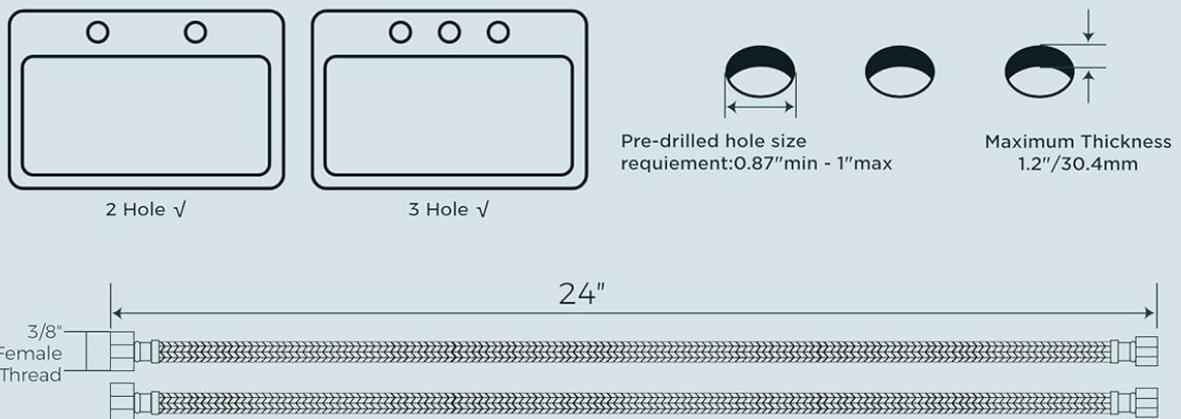


Image: Detailed dimensions of the faucet and pop-up drain, along with sink hole requirements for 2 or 3-hole installations.

5. SETUP AND INSTALLATION

Follow these steps for a user-friendly installation. A detailed installation video is also available for guidance.

1. **Prepare the Sink:** Ensure the sink area is clean and dry. Turn off the main water supply to the bathroom.
2. **Install the Faucet Body:** Place the plastic gasket on the sink hole. Insert the faucet body into the center hole(s) of your sink.
3. **Secure the Faucet:** From underneath the sink, thread the rubber gasket and secure with the fixing nut.

Tighten the nut as shown in the diagram, ensuring the faucet is stable.

4. **Connect Water Supply Hoses:** Connect the hot and cold water supply hoses to the corresponding inlets on the faucet body and to your water supply valves. Ensure connections are hand-tight, then use a wrench for a final quarter turn. **Important:** If the thread size is too small, please contact FORIOUS for an adapter.
5. **Install Pop-Up Drain:** Follow the instructions provided with the pop-up drain assembly to install it into the sink drain hole. Ensure all seals are correctly placed to prevent leaks.
6. **Test Water Pressure:** Before connecting the hoses to the faucet, open the water supply valves to test water pressure and flush out any accumulated hard water or debris from the lines. Then close the valves.
7. **Final Water Connection:** Connect the flushed hoses to the faucet inlets.
8. **Check for Leaks:** Turn on the main water supply and check all connections for leaks. Run the faucet for a few minutes to ensure proper operation and flush any remaining air from the lines.

Video: Official FORIOUS installation guide for the two-handle centerset bathroom faucet, demonstrating the step-by-step process.



Image: Visual representation of the faucet installation process, including securing the faucet and connecting water lines.

6. OPERATING INSTRUCTIONS

- **Water Flow Control:** The two handles control the water flow. Turn the left handle for hot water (indicated by red) and the right handle for cold water (indicated by blue). Rotate the handles to adjust the flow rate.
- **Temperature Control:** Mix hot and cold water by adjusting both handles simultaneously to achieve your desired water temperature.
- **360° Swivel Spout:** The high-arc spout can swivel 360 degrees, providing flexibility and ample space for various sink tasks.
- **Pop-Up Drain:** Press the top of the pop-up drain to close it and retain water in the sink. Press again to open it and allow water to drain. The built-in strainer helps prevent clogs.

Spout 360° Rotated

Convenience daily cleaning



Image: The faucet features a 360-degree swivel spout for convenience and a pop-up drain with a built-in strainer to prevent clogs.

7. MAINTENANCE

- **Cleaning:** Clean the faucet regularly with a soft cloth and mild soap. Avoid abrasive cleaners, harsh chemicals, or scouring pads, as these can damage the matte black finish.
- **Aerator Maintenance:** The bubbling aerator is removable and replaceable. If water flow decreases or becomes irregular, unscrew the aerator from the spout, clean any debris, and rinse it under running water. Reinstall the aerator securely.
- **Ceramic Cartridge:** The faucet is equipped with advanced drip-free ceramic valves tested for 500,000

times water tightness. No regular maintenance is typically required for the cartridge.



Make the water softer and water saving **35%**

Image: The faucet's removable ABS aerator helps soften water and reduces water consumption by 20% (1.2 GPM).

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
Low Water Flow	Clogged aerator; partially closed water supply valves.	Clean or replace the aerator. Ensure water supply valves are fully open.

Problem	Possible Cause	Solution
Leaks from Faucet Base	Loose mounting nuts; improperly seated gaskets.	Tighten mounting nuts. Check and reseal gaskets.
Leaks from Hose Connections	Loose connections; damaged O-rings.	Tighten connections. Replace O-rings if damaged.
Water Not Draining Properly	Clogged pop-up drain strainer.	Remove and clean the pop-up drain strainer.

9. WARRANTY AND SUPPORT

FORIOUS offers an extended warranty for this product. For specific warranty details, claims, or technical support, please refer to the warranty information included in your package or visit the official FORIOUS website. You can also contact FORIOUS-USA directly for assistance.

We are committed to providing high-quality products and excellent customer service. Your satisfaction is our priority.