

Enga 6F-JTHD-6683

Enga Luxury Dual Shower Head System with Body Jets

Model: 6F-JTHD-6683

Brand: Enga

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Enga Luxury Dual Shower Head System with Body Jets. This advanced shower system features a 20-inch LED shower head offering rainfall, mist, and waterfall modes, a 6-inch wall shower, a handheld spray, and six adjustable body jets. The integrated thermostatic valve ensures a consistent and safe water temperature.

The system is designed to provide a comprehensive and customizable showering experience, allowing individual or combined use of its six functions. The LED lighting in the main shower head adds an aesthetic element, with automatic color changes and remote control options for color temperature, brightness, and dynamic speed.

Constructed from high-quality brass and stainless steel with an electroplating/electrophoresis surface treatment, this system is built for durability and resistance to corrosion and rust, minimizing water and fingerprint marks.

PRODUCT COMPONENTS

- 1 x 20-inch Stainless Steel 304 LED Shower Head with LED Power Plug
- 1 x Brass Thermostatic Shower Valve
- 6 x Brass Spa Body Jets
- 1 x 6-inch Wall Shower Head
- 1 x Brass Hand Shower & Holder

- 1 x 59-inch Stainless Steel Shower Hose
- 1 x Installation Manual (includes reference diagram with waterway)



Image: Overview of the Enga Luxury Dual Shower Head System with LED lighting and various spray functions.



Image: Visual representation of the six distinct shower functions available in the system.

SETUP AND INSTALLATION

Installation of this shower system requires professional plumbing and electrical knowledge. It is highly recommended to hire a qualified professional for installation to ensure proper function and safety. Refer to the included installation manual for detailed diagrams and step-by-step instructions.

Key Installation Considerations:

- **Mounting:** The main shower head is designed for embedded/recessed ceiling mount. The wall shower and body jets are wall-mounted.
- **Water Connections:** The thermostatic shower valve requires 3/4" NPT inlets for hot and cold water. Each function outlet is 1/2" NPT. Ensure all connections are secure and leak-free.
- **Electrical Connection (for LED):** The LED shower head requires a 100-240V AC power supply. Ensure proper wiring and safety precautions are followed. The LED controller uses 3pcs 1.5V AAA Lithium Batteries (not included).
- **Water Pressure:** The system is designed for optimal performance at 60 Psi.

Your browser does not support the video tag.

Video: Demonstration of the 20-inch LED 3-function rain shower head in operation, showcasing rainfall, waterfall, and mist modes with color-changing LED lights.

OPERATING INSTRUCTIONS

Thermostatic Valve Operation:

- The thermostatic valve allows you to set and maintain a precise water temperature.
- To adjust the temperature, rotate the lower handle.
- For safety, the temperature can be locked at 38°C (100°F) to prevent accidental scalding, especially for children and the elderly.

Function Selection:

- The shower system features multiple handles, each corresponding to a specific shower function (Rainfall, Waterfall, Mist, Handheld, Wall Shower, Body Jets).
- You can activate each function individually or combine multiple functions simultaneously for a customized experience.

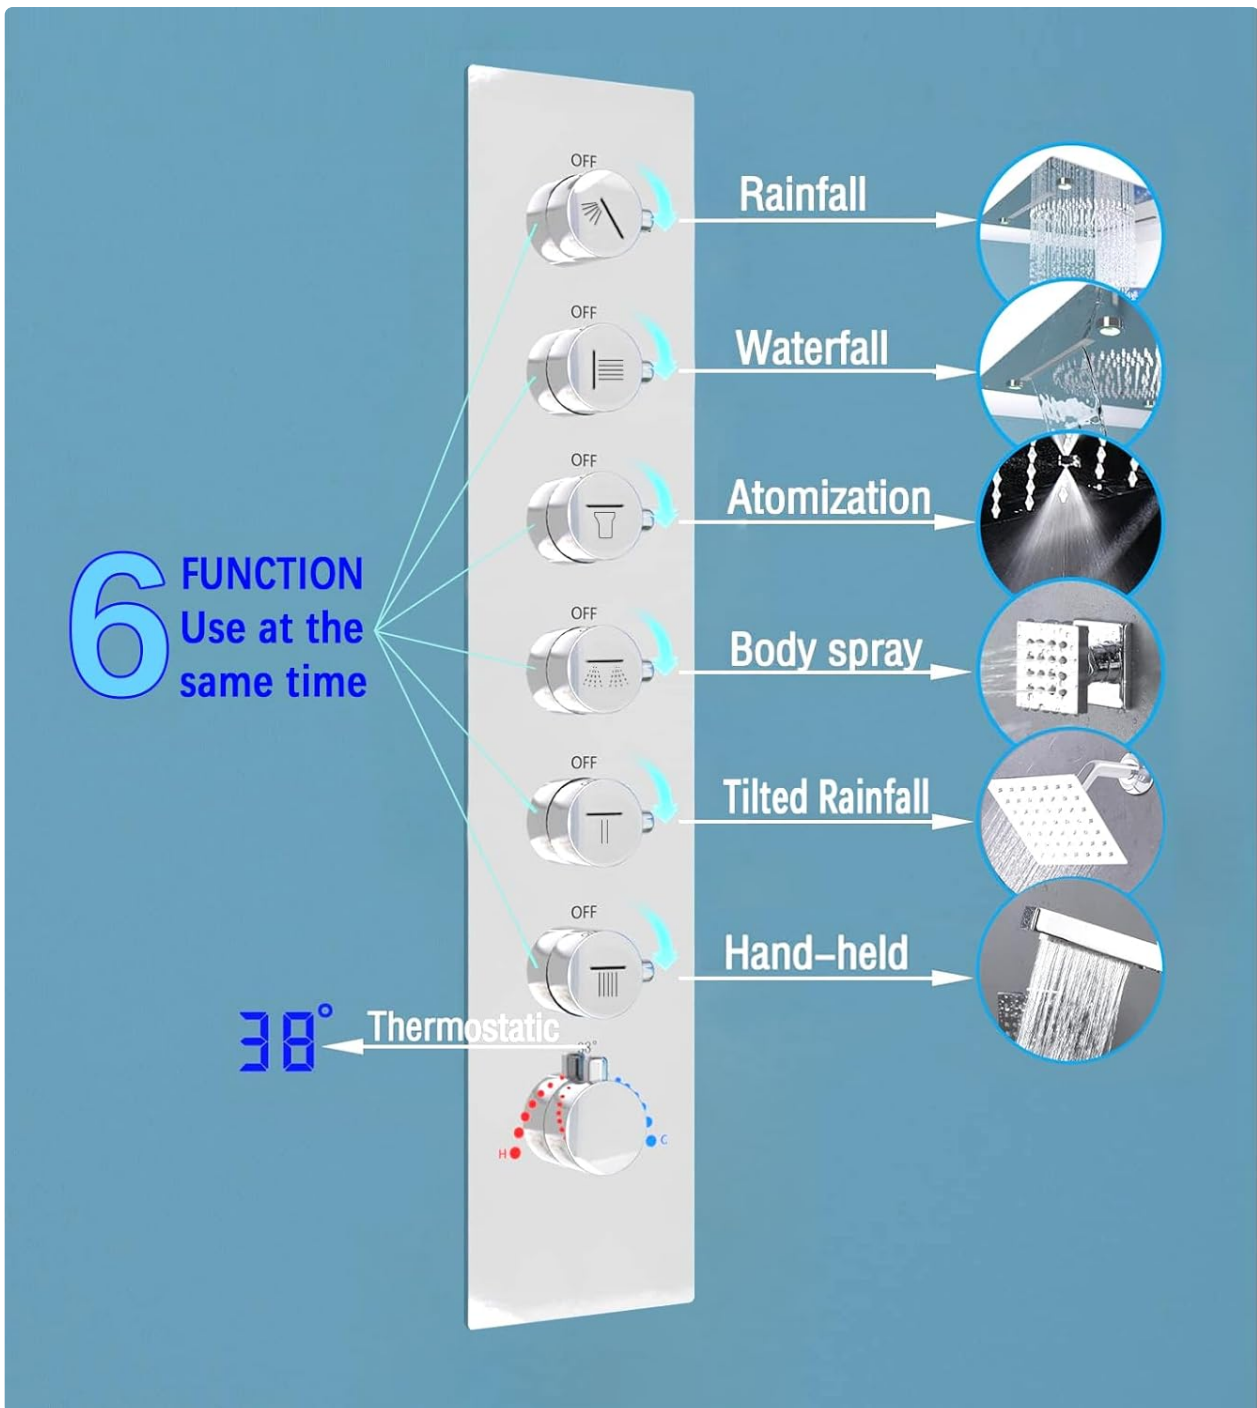


Image: The control panel illustrating how to select the six different shower functions and adjust the thermostatic temperature.

LED Lighting Control:







- The 20-inch shower head includes LED lighting with automatic color change.
- Use the provided remote control to adjust LED settings. The remote allows for changing color temperature, dynamic brightness, and dynamic speed.
- Ensure the remote control has 3pcs 1.5V AAA Lithium Batteries installed.

64


LED light colour change

Input:AC 100-240V-50/60Hz

Output:DC 12V-2000mA

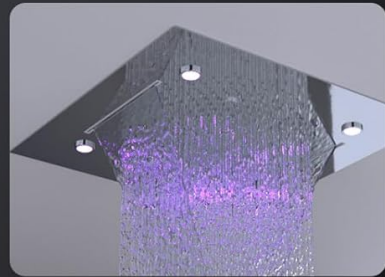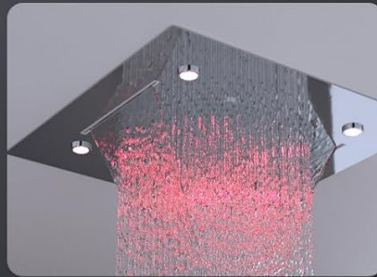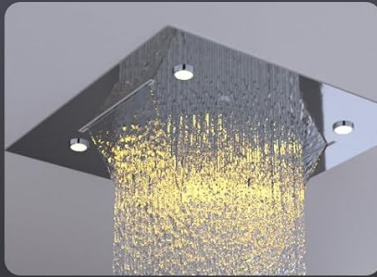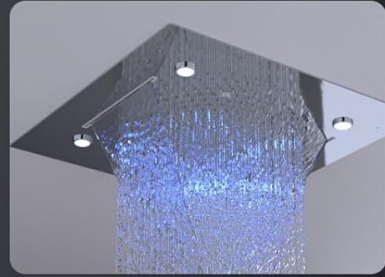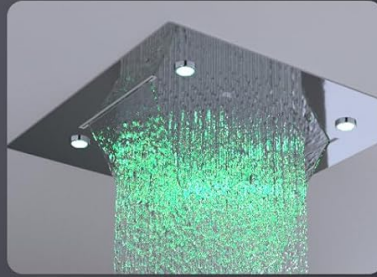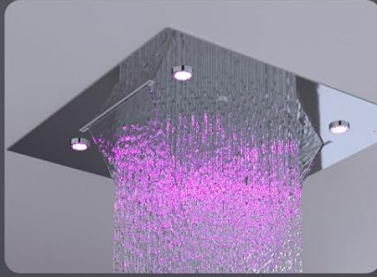

Color Touch Ring



Color Temperature adjusting



Turn ON/OFF



Dynamic Brightness adjusting



Mode Switch



Dynamic Speed adjusting

Image: Display of various LED light colors and the remote control interface for adjusting lighting settings.

Body Jet Adjustment:

- The six body jets feature 360° rotation, allowing you to direct the water flow as desired for a targeted massage experience.

6PCS

Solid brass massage body jet


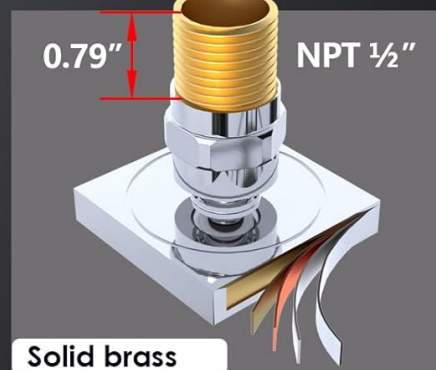


Image: Close-up of the solid brass body jets, highlighting their self-cleaning nozzles and rotational capability.

MAINTENANCE

Cleaning:

- **Nozzles:** The shower head and body jets are equipped with self-cleaning silicone nozzles. Periodically rub these nozzles to dislodge any mineral buildup and maintain optimal spray performance.
- **Surfaces:** Clean the chrome and brass surfaces with a soft cloth and mild soap or a non-abrasive cleaner specifically designed for bathroom fixtures. Avoid using harsh chemicals, abrasive pads, or acidic cleaners, as these can damage the finish.
- **LED Controller:** Replace the AAA batteries in the LED remote control as needed.

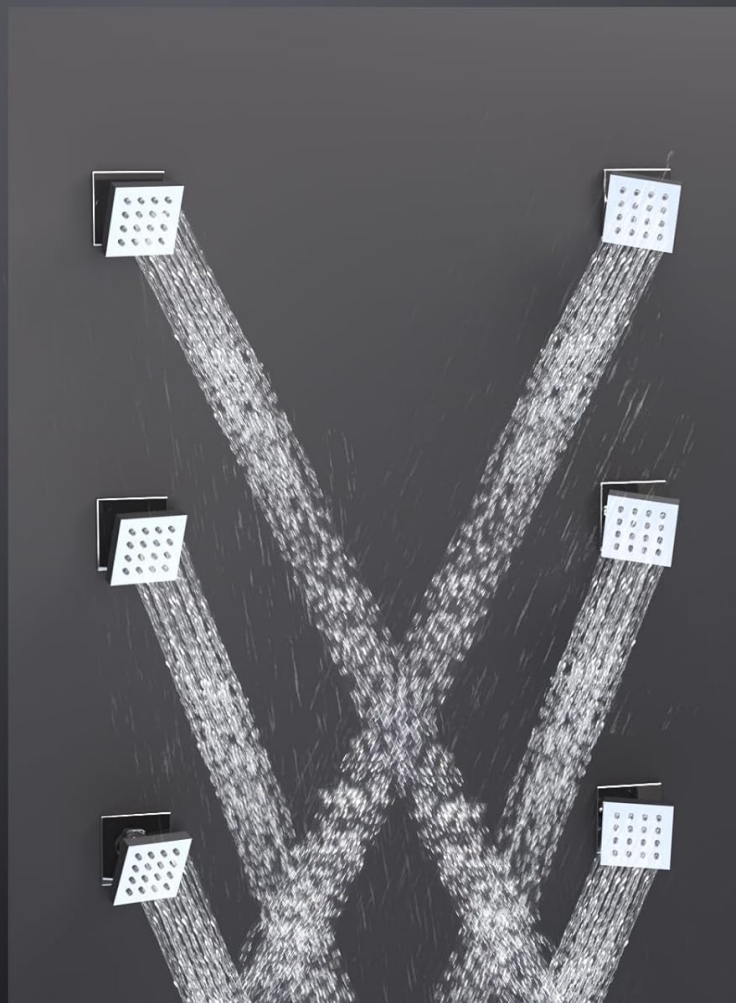

✓ **Water+Air Fusion**
Save water **30%**

6inch A different kind of rain shower relaxation experience
Tilted Rainfall Shower Cleanses the body while retaining dry hair

Image: Detail of the handheld shower head, showing its high-pressure spray and self-cleaning nozzles.

TROUBLESHOOTING

If you encounter any issues with your Enga Luxury Dual Shower Head System, please consider the following common troubleshooting steps before contacting support:

- **No Water Flow or Low Pressure:** Check if the main water supply is fully open. Ensure there are no blockages in the shower hose or nozzles. Clean any mineral buildup from the self-cleaning nozzles.
- **Inconsistent Water Temperature:** Verify that both hot and cold water supplies are connected correctly and fully open. If the thermostatic valve is set to 38°C, ensure it is not accidentally locked at a different temperature.
- **LED Lights Not Working:** Check the electrical connection to the LED shower head. Ensure the LED remote control has fresh batteries and is within range.
- **Leaks:** Inspect all connections for tightness. If leaks persist, professional assistance may be required.

For complex issues or if troubleshooting steps do not resolve the problem, please contact Enga customer support or a qualified plumber.

SPECIFICATIONS

Feature	Detail
Brand	Enga
Model Number	6F-JTHD-6683
Color	Chrome
Material	Brass, Stainless Steel
Finish Type	Chrome
Number of Handles	1 (for temperature control, multiple diverter handles)
Mounting Type	Ceiling Mount (main shower), Wall Mount (other components)
Head Size	20 inches (main shower head), 6 inches (wall shower)
Product Dimensions	22 x 22 x 18 inches (overall package)
Item Weight	47 pounds
Water Flow Rate	1.8 GPM per function
Water Pressure	60 Psi (recommended)
Threads	3/4" NPT (Inlet for Hot/Cold), 1/2" NPT (Outlet for each function)
LED Power	100-240V AC (for LED head), 3x 1.5V AAA Lithium Batteries (for controller, not included)

WARRANTY AND SUPPORT

Enga provides lifetime limited support for this product, ensuring exchange replacement for any defective parts. For warranty claims, technical assistance, or any questions regarding your shower system, please contact Enga customer service. Keep your purchase receipt as proof of purchase.

For further assistance, please visit the [Enga Store on Amazon](#).