



Manuals.plus /

› Savior /

› Savior T25 Trimmer Head Instruction Manual for Husqvarna and Jonsered Trimmers

## Savior T25

# Savior T25 Trimmer Head Instruction Manual

For Husqvarna and Jonsered String Trimmers

## 1. INTRODUCTION

---

Thank you for choosing the Savior T25 Trimmer Head. This manual provides essential information for the safe and effective installation, operation, and maintenance of your new trimmer head. Please read these instructions carefully before use and retain them for future reference.



Image 1.1: Savior T25 Trimmer Head with included trimmer line.

## 2. PRODUCT OVERVIEW

### 2.1. Compatibility

The Savior T25 Trimmer Head is designed as a replacement for various string trimmer models. It replaces original part numbers such as 966674401, 537338306, 537338310, 531009279, 537338302, and 578446101.

Compatible with numerous Husqvarna and Jonsered models, including but not limited to:

- **Husqvarna:** 122LD, 122LDX, 123L, 124L, 124R, 123LD, 125L, 125RJ, 125LDX, 125RD, 125RJ, 128L, 128R, 128RJ, 128LDX, 128DJX, 129L, 129LDX, 129DJX, 130C, 130L, 330LK, 223L, 224L, 225L, 225LD, 225R, 225RJ, 232L, 232R, 235RJX, 226R, 226RJ, 322R, 323L, 323LD, 323R, 323RJ, 324LX, 324LDX, 324RX, 325LX, 325RX, 325RDX, 325RJX, 325L, 343F, 343R, 345FX, 345RX, 325iLK, 326LS, 327LDX, 327LS, 327LX, 327RDX, 327RJX, 327RX, 426LST, 430LS, 524LK, 524R, 525L, 525LK, 525LS, 525LS II, 525LST, 525LST II, 525LX, 525RJX, 525RK, 525RX, 525RX II, 525RXT, 525RXT II, 533RS, 535LK.
- **Jonsered:** BC2128 CAN (952711959), CC2126 CAN, CC2128 CAN (952711960), CC2128 US

(952711957), GTS2228 (967301902), GC2128 US CAN (952711955), GC2128C CAN (952711958), GC2128C EU AU (952715762), GC2128C US (952711956).

## 2.2. Key Features

- **Arbor Size:** M10 x 1.25LH for secure attachment.
- **Pre-wound Line:** Comes with 19 feet (6 meters) of 0.105-inch trimmer line.
- **Compatible Line Diameters:** Supports 0.080-inch, 0.095-inch, or 0.105-inch line.
- **Bump-Feed Mechanism:** Line extends by tapping the head against the ground.
- **Durable Construction:** Made from impact-resistant plastic material.
- **Easy to Use:** Simple attachment, loading, and operation.

## 2.3. Package Contents

The package includes:

- 1 x Savior T25 Trimmer Head
- 1 x 49-foot (15-meter) roll of 0.105-inch Trimmer Line



Image 2.1: Contents of the Savior T25 Trimmer Head package.

## 3. SETUP AND INSTALLATION

Before installation, ensure your trimmer's engine is off and the spark plug wire is disconnected to prevent accidental starting. Always wear appropriate safety gear, including gloves and eye protection.

### 3.1. Attaching the Trimmer Head

1. Remove the old trimmer head by unscrewing it. Note the thread direction (typically left-hand thread, meaning you turn clockwise to loosen).
2. Align the Savior T25 Trimmer Head with the trimmer shaft's arbor. The arbor size is M10 x 1.25LH.
3. Screw the new trimmer head onto the shaft. Turn counter-clockwise to tighten for left-hand threads. Ensure it is securely fastened.



## EASY INSTALLATION

- impact-resistant plastic material
- with durable line
- multiple cutting solutions



Image 3.1: Visual guide for easy installation of the trimmer head onto the shaft.

# HUSQVARNA

## T25 TRIMMER HEAD

Husqvarna 578446101



Image 3.2: The Savior T25 Trimmer Head properly installed on a compatible Husqvarna trimmer.



**Arbor Sizes: M10 x 1.25LH**

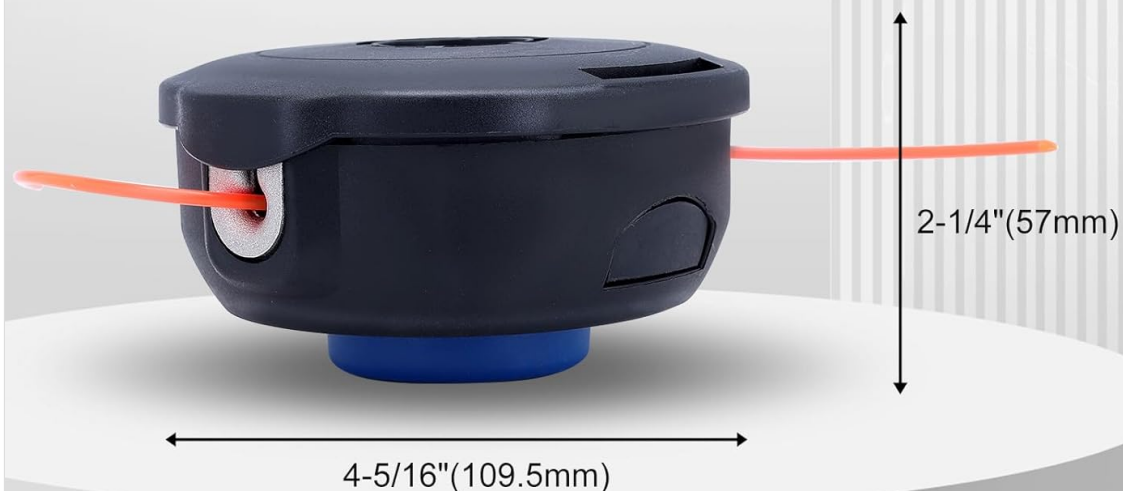


Image 3.3: Detail of the M10 x 1.25LH arbor size for proper fitment.

## 4. OPERATING INSTRUCTIONS

### 4.1. Loading Trimmer Line

The Savior T25 Trimmer Head is designed for easy line reloading. Follow these steps:

1. Locate the small holes on the side of the trimmer head. Insert a screwdriver or a similar tool into one of these holes to lock the spool in place.
2. Unscrew the top cover of the trimmer head.
3. Remove the inner spool.
4. Feed the new trimmer line through the eyelets on the spool, ensuring it is evenly wound. Follow the directional arrows on the spool for correct winding.
5. Place the re-wound spool back into the trimmer head housing.
6. Thread the ends of the trimmer line through the exit holes on the trimmer head.
7. Replace the top cover and tighten it securely.

# RELOAD INSTRUCTION



Image 4.1: Step-by-step guide for reloading the trimmer line into the head.

# MORE PRODUCT DETAILS



Image 4.2: Exploded view showing the cover, robust eyelets, spool & bump knob, and housing of the trimmer head.

## 4.2. Extending Trimmer Line (Bump-Feed)

To extend the trimmer line during operation, simply tap the bottom of the trimmer head against a firm surface (e.g., the ground) while the trimmer is running at full speed. This action releases more line from the spool.

## 4.3. Usage Scenarios

The Savior T25 Trimmer Head is suitable for various trimming tasks, including:

- Trimming grass in open areas.
- Edging along sidewalks and driveways.
- Clearing weeds around fences and garden beds.

# APPLICABLE TO DIFFERENT SCENARIOS



Image 4.3: Examples of the trimmer head being used in different landscaping situations.

## 5. MAINTENANCE

---

Regular maintenance ensures optimal performance and extends the lifespan of your trimmer head.

- **Cleaning:** After each use, clean the trimmer head to remove grass clippings, dirt, and debris. This prevents buildup that can hinder line feeding.
- **Inspection:** Periodically inspect the trimmer head for signs of wear, cracks, or damage. Check the eyelets where the line exits for wear, as worn eyelets can cause line breakage.
- **Line Condition:** Ensure the trimmer line is not brittle or excessively worn. Replace the line as needed.
- **Storage:** Store the trimmer head in a clean, dry place when not in use.

## 6. TROUBLESHOOTING

---

If you encounter issues with your Savior T25 Trimmer Head, consider the following common problems and solutions:

- **Line Not Feeding:**
  - Ensure the line is properly wound on the spool and not tangled.
  - Check if the line is stuck in the eyelets. Clean any debris.

- Verify that the bump-feed mechanism is not obstructed.
- **Excessive Line Breakage:**
  - Ensure you are using the correct diameter line (0.080", 0.095", or 0.105").
  - Inspect the eyelets for sharp edges or wear that could be cutting the line.
  - Avoid hitting hard surfaces excessively.
- **Trimmer Head Not Attaching Securely:**
  - Confirm the arbor size (M10 x 1.25LH) matches your trimmer's shaft.
  - Ensure the threads are clean and free of debris.

If problems persist, consult your trimmer's instruction manual or contact customer support.

## 7. SPECIFICATIONS

Feature	Specification
Model Number	T25
Arbor Size	M10 x 1.25LH
Pre-wound Line Length	19 ft (6 meters)
Pre-wound Line Diameter	0.105 inches
Compatible Line Diameters	0.080", 0.095", 0.105"
Product Dimensions	4.33 x 4.33 x 2.24 inches
Item Weight	13.4 ounces
Manufacturer	Savior

## 8. WARRANTY AND SUPPORT

The Savior T25 Trimmer Head is manufactured by Savior. For any questions, technical assistance, or warranty inquiries, please refer to the contact information provided with your purchase or visit the official Savior website. Please retain your proof of purchase for warranty claims.