



Manuals.plus /

› FREDBECK /

› Fredbeck Double 36x84 Frosted Glass Barn Doors Installation and User Manual

FREDBECK Double 36x84 Frosted Glass Barn Doors

Fredbeck Double 36x84 Frosted Glass Barn Doors User Manual

Model: Double 36x84 Frosted Glass Barn Doors

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Fredbeck Double 36x84 Frosted Glass Barn Doors. Please read this manual thoroughly before beginning installation or use to ensure proper function and safety.



Figure 1: Fredbeck Double Frosted Glass Barn Doors installed.

2. SAFETY INFORMATION

Always follow basic safety precautions when installing or using this product to reduce the risk of injury or damage.

- **Read all instructions:** Ensure you understand all steps before proceeding.
- **Two-person installation:** Due to the weight and size of the doors and hardware, a minimum of two people is recommended for installation.
- **Proper tools:** Use appropriate tools for drilling, measuring, and securing components.
- **Wall structure:** Ensure the wall where the track will be mounted is structurally sound and can support the weight of the doors and hardware. Use a header board if necessary (not included).
- **Glass handling:** Handle glass panels with care to prevent breakage and injury. Wear appropriate protective gear, such as gloves and eye protection.
- **Secure all fasteners:** Ensure all screws and bolts are tightened securely to prevent the doors from falling or malfunctioning.

3. PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation. If any parts are missing or damaged, contact customer support.

- 2 x Door Panels (Width: 36 inches, Height: 84 inches)
- 2 x Hardware Kits, each including:
 - 6.6 ft Sliding Track
 - 2 x Hangers (Rollers)
 - 5 x Spacers
 - 1 x Door Stop
 - 1 x Floor Guide
 - 1 x Handle

Note: A header board for mounting the track is not included and may be required depending on your wall structure.

4. SETUP AND INSTALLATION

Follow these step-by-step instructions for proper installation of your barn doors.

4.1 Pre-Installation Checks

- **Measure:** Confirm the opening width and height are suitable for the 36x84 inch doors.
- **Wall Type:** Determine if your wall is solid wood, drywall with studs, or concrete. This will affect fastener choice and whether a header board is needed.
- **Clearance:** Ensure there is sufficient space above the door opening for the track and hangers, and to the sides for the doors to slide open fully.

4.2 Installation Steps

The installation process involves assembling the door panels, mounting the track, and attaching the hardware.

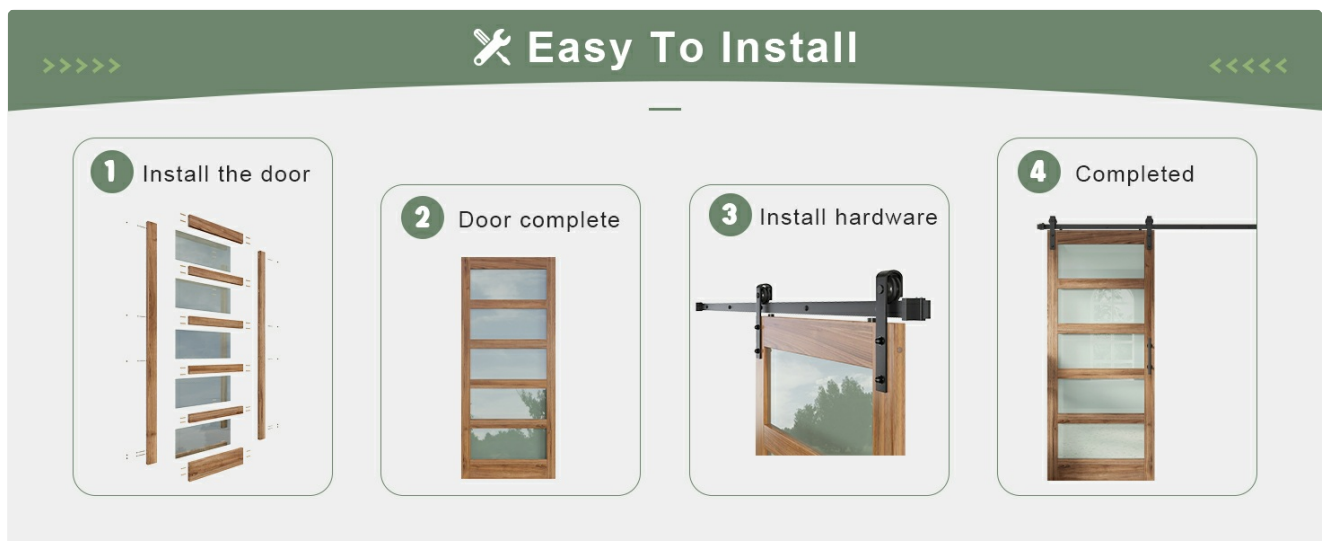


Figure 2: Overview of the installation process.

1. **Assemble the Door Panels:** If the door panels require assembly (e.g., attaching glass inserts or frame pieces), follow the specific instructions provided with the door components.

2. Mount the Sliding Track:

- Measure and mark the desired height for the track above the door opening. Ensure it is level.
- If using a header board, secure it to the wall studs first.
- Attach the track to the wall or header board using the provided spacers and fasteners. Ensure the track is securely fastened and level across its entire length.



Figure 3: Connecting track sections.

3. **Attach Hangers to Doors:** Secure the hangers (rollers) to the top edge of each door panel according to the instructions. Ensure they are evenly spaced and firmly attached.
4. **Hang the Doors:** Carefully lift each door panel and hook the hangers onto the sliding track.
5. **Install Door Stops:** Position and secure the door stops at the ends of the track to prevent the doors from sliding off. Adjust their position to control the door's open and closed limits.
6. **Install Floor Guides:** Mount the floor guides to the floor directly below the door opening. These guides prevent the bottom of the doors from swinging out.
7. **Attach Handles:** Secure the handles to the door panels at a comfortable height.

5. OPERATING THE BARN DOORS

Your Fredbeck barn doors are designed for smooth and quiet operation.

- **Opening/Closing:** Gently push or pull the door panels along the track using the handles. Avoid forcing the doors.
- **Frosted Glass:** The frosted glass provides privacy while allowing light to pass through.
- **Handles:** The handles are designed for a comfortable grip and allow for easy two-way operation.

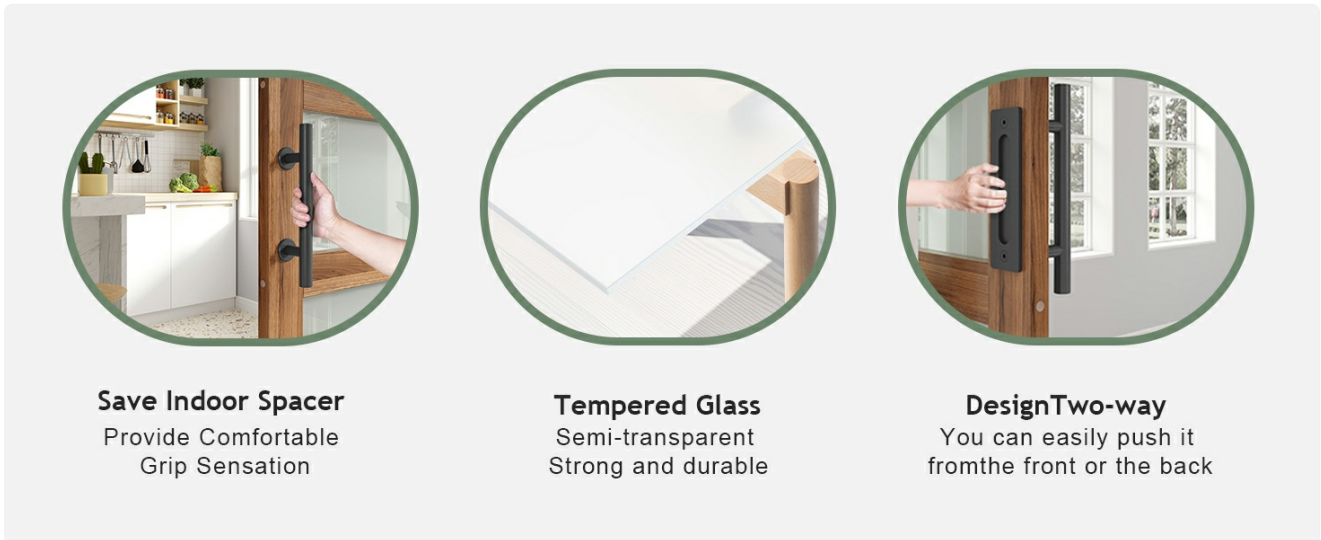


Figure 4: Door handle design and tempered glass detail.

6. MAINTENANCE

Regular maintenance will ensure the longevity and smooth operation of your barn doors.

- **Cleaning the Doors:** The PVC waterproof door surface is easy to clean. Use a soft, damp cloth with mild soap and water. Avoid abrasive cleaners or harsh chemicals that could damage the finish or glass.
- **Cleaning Frosted Glass:** For frosted glass, use a glass cleaner and a soft, lint-free cloth. Wipe gently to avoid scratching the surface.
- **Track and Rollers:** Periodically inspect the track for any debris and clean it. Check the rollers for smooth movement. If they become stiff, a small amount of silicone-based lubricant can be applied to the roller bearings (avoid applying to the track surface itself).
- **Hardware:** Check all screws and fasteners periodically to ensure they remain tight. Tighten any loose connections to maintain stability and safety.

Water Proof

Multi-layer solid wood,

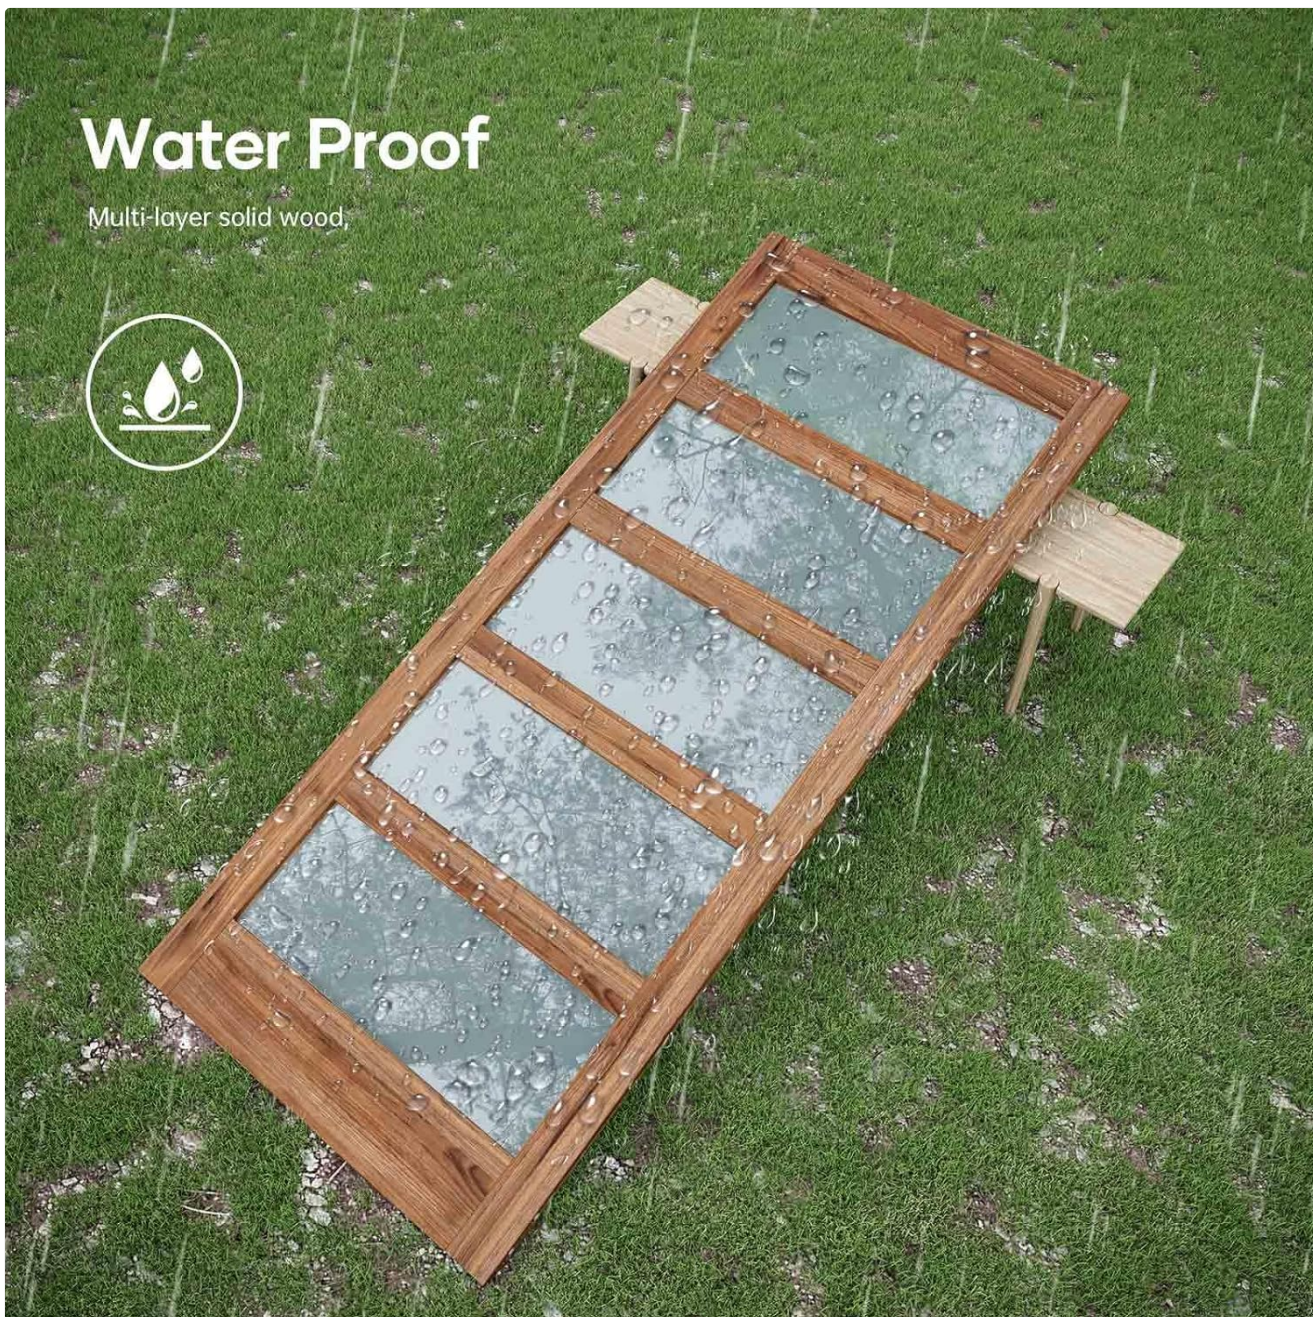


Figure 5: The door's waterproof surface simplifies cleaning.

7. TROUBLESHOOTING

Here are solutions to common issues you might encounter:

Problem	Possible Cause	Solution
Door does not slide smoothly	Debris in track, loose rollers, misaligned track, worn rollers.	Clean the track. Check and tighten roller attachments. Verify track is level and securely mounted. Lubricate rollers if necessary.
Door swings out at the bottom	Floor guide not installed or improperly adjusted.	Install or adjust the floor guide to properly engage the bottom of the door.
Door hits wall/door stop too hard	Door stops improperly positioned.	Adjust the position of the door stops on the track to provide adequate cushioning.
Noise during operation	Dry rollers, loose hardware, friction between door and floor guide.	Lubricate rollers. Tighten all hardware. Ensure floor guide is not too tight against the door.

8. SPECIFICATIONS

- **Brand:** FREDBECK
- **Model:** Double 36x84 Frosted Glass Barn Doors
- **Door Dimensions (each):** 36 inches (Width) x 84 inches (Height)
- **Material:** Glass, Multi-layer solid wood with PVC surface
- **Glass Type:** Frosted, Tempered Glass
- **Hardware:** Solid steel, fine black powder coated surface
- **Style:** Modern
- **Assembly Required:** Yes (for door panels and hardware installation)

9. WARRANTY AND SUPPORT

For warranty information or technical support, please contact the manufacturer directly. Keep your purchase receipt as proof of purchase.

- **Manufacturer:** FREDBECK
- **Contact Information:** Refer to your purchase documentation or the FREDBECK official website for the most current support contact details.