

[Manuals.plus](#) /

› [FREDBECK](#) /

› FREDBECK 54in x 96in Wood Barn Door with 9FT Hardware Kit Instruction Manual

FREDBECK MB-01HA2-YS-5496K

FREDBECK 54in x 96in Wood Barn Door with 9FT Hardware Kit Instruction Manual

Model: MB-01HA2-YS-5496K

INTRODUCTION

This instruction manual provides comprehensive guidance for the assembly, installation, operation, and maintenance of your FREDBECK 54in x 96in Wood Barn Door with 9FT Barn Door Hardware Kit. To ensure safe and proper use, please read all instructions thoroughly before beginning any procedures. Keep this manual for future reference.

SAFETY INFORMATION

- **Read All Instructions:** Familiarize yourself with all steps before assembly and installation.
- **Two-Person Installation:** Due to the size and weight of the door, a minimum of two people is required for safe handling and installation.
- **Wall Structure:** Ensure the wall where the track will be mounted is structurally sound and can support the weight of the door and hardware. Use a stud finder to locate wall studs for secure mounting.
- **Proper Tools:** Use appropriate tools for each step as specified in the instructions.
- **Pinch Points:** Be aware of potential pinch points during door movement and installation. Keep hands and fingers clear.
- **Hardware Check:** Regularly inspect all hardware components for tightness and wear. Tighten fasteners as needed.
- **Children and Pets:** Keep children and pets away from the installation area during assembly and installation.

PACKAGE CONTENTS

Verify that all components listed below are present and undamaged before beginning assembly.

Packing List



54 barn door



9 ft track kit



Pull handle

This image displays the main components included in the package: the 54-inch barn door, the 9-foot track kit with hangers and spacers, and the pull handle.

- 1x 54-inch Wood Barn Door Slab
- 2x 4.5FT Track Sections (to form a 9FT track)
- 2x Hangers (for mounting the door to the track)
- 8x Spacers (for track mounting)
- 1x Floor Guide (to stabilize the bottom of the door)
- 1x Pull Handle
- Screws and Corks (various fasteners for assembly and installation)
- 1x Instruction Manual (this document)

SPECIFICATIONS

Brand	FREDBECK
Model Number	MB-01HA2-YS-5496K
Door Dimensions (W x H)	54 inches x 96 inches
Door Thickness	1 3/8 inches
Solid Core Thickness	1/2 inch
Track Length	9 feet
Material	Spruce Wood
Style	K Shape, Rustic
Assembly Required	Yes

Natural Spruce Wood



Long Growth
Cycle



Hardness Factor
Medium Hard



Dry & Damp
Not easy to Crack



High Density
More Corrosion
Resistant



This image illustrates the natural spruce wood material, known for its long growth cycle, medium hardness, resistance to cracking, and high density for corrosion resistance.

SETUP: ASSEMBLY AND INSTALLATION

The FREDBECK barn door requires assembly before installation. Follow these steps carefully.

1. Door Panel Assembly



SOLID WOOD DOOR

Derived from nature,
genuine materials

EXQUISITE CRAFTSMANSHIP

PROFESSIONAL AND PRECISE

Drill grooves and holes in
advance for customers to facilitate installation




EASY TO INSTALL

The package comes with an instruction manual,
which is simple and easy to understand,
and the installation is convenient
and fast

This image shows the mitered wood panels and pre-drilled holes designed for a snug fit and easy assembly.

1. Unpack all wood panels and hardware. Identify each piece according to the parts list (refer to the included manual for detailed diagrams).
2. Assemble the main door frame using the provided screws and pre-drilled holes. Ensure all mitered joints fit snugly.
3. Attach the K-shape cross braces to the door frame, aligning them with the pre-drilled holes. Secure with screws.
4. Insert the solid core panels into the assembled frame. The door is designed for simple assembly, allowing for customization of plank placement.
5. Ensure all screws are tightened securely, but do not overtighten to avoid stripping the wood.

2. Hardware Installation

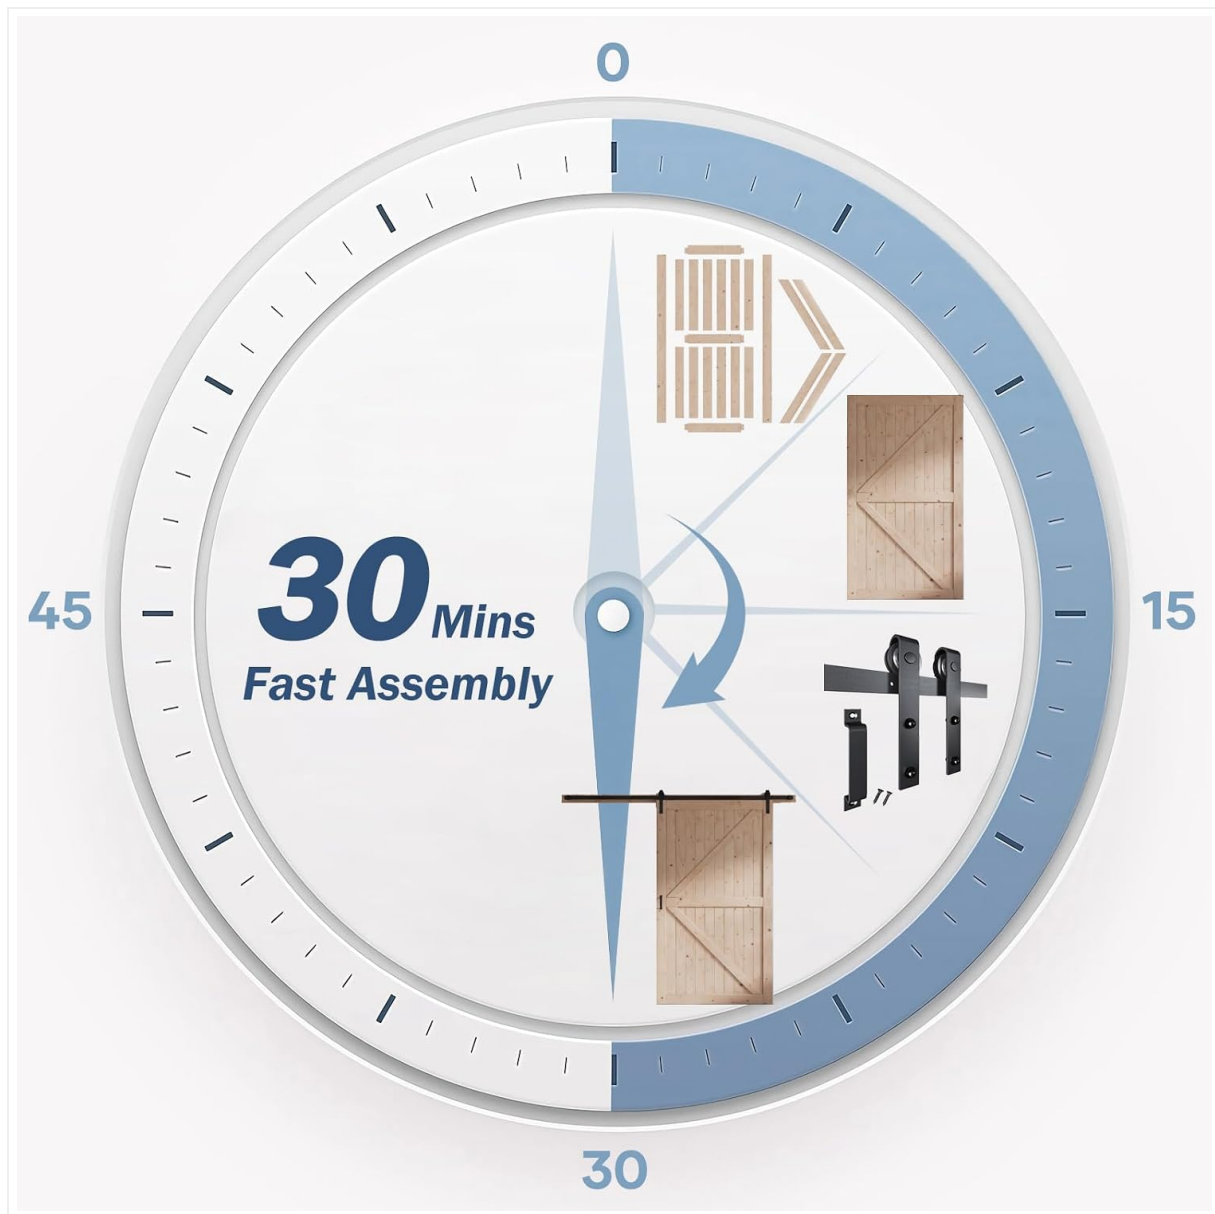

This diagram visually represents the assembly steps, from individual planks to a fully installed barn door, highlighting the efficiency of the process.

1. **Measure and Mark:** Determine the desired height for your barn door. The track should be mounted at a height that allows the door to clear the floor by approximately 1/2 inch. Mark the drilling points for the track on your wall, ensuring they align with wall studs for maximum support.
2. **Install Track:** Using the provided spacers and screws, securely attach the two 4.5FT track sections to the wall. Ensure the track is level and firmly mounted.
3. **Attach Hangers to Door:** Mount the two hangers to the top edge of the assembled barn door using the designated hardware.
4. **Hang Door:** With assistance, carefully lift the door and hook the hangers onto the track.
5. **Install Floor Guide:** Position the floor guide at the bottom of the door opening to prevent the door from swinging out. The door has a pre-made groove for the floor guide. Secure the floor guide to the floor.
6. **Install Pull Handle:** Attach the pull handle to the desired side of the door using the provided screws.

OPERATING INSTRUCTIONS

Your FREDBECK barn door is designed for smooth and quiet operation.

- **Opening and Closing:** Grasp the pull handle firmly and slide the door along the track. Apply gentle, even

pressure.

- **Floor Guide Function:** The floor guide at the bottom of the door ensures stability and prevents the door from swaying as it slides.
- **Door Stops:** The track includes stops to prevent the door from sliding off the ends. Ensure these are securely in place.

MAINTENANCE

Regular maintenance will ensure the longevity and optimal performance of your barn door.

Wood Care



SUPPORT
DIY STAINED

Personalize with Paint / Stain for a Perfect Home Fit

This image illustrates the option to personalize your barn door with paint or stain to match your home decor.

- **Cleaning:** Wipe the wood surfaces with a soft, damp cloth. Avoid harsh chemicals or abrasive cleaners that could damage the spruce wood.
- **Finishing:** The door comes as raw spruce wood. You can choose to paint, stain, or apply a clear coat to protect the wood and match your interior design. Follow the instructions of your chosen wood finish product.
- **Humidity Control:** Wood can react to changes in humidity. Maintain a stable indoor environment to prevent warping or cracking.

Hardware Care

- **Lubrication:** Periodically apply a silicone-based lubricant to the track and hanger wheels to ensure smooth operation.
- **Tightness Check:** Every few months, check all screws and bolts on the track, hangers, and handle to ensure they remain tight. Retighten as necessary.

TROUBLESHOOTING

If you encounter issues with your barn door, refer to the following common problems and solutions:

- **Door is difficult to slide:**
 - Check if the track is level. An unlevel track can cause resistance.
 - Ensure the track is clean and free of debris.
 - Lubricate the hanger wheels and track with a silicone spray.
 - Verify that the floor guide is properly aligned and not causing friction.
- **Door sways excessively:**
 - Ensure the floor guide is securely installed and properly engaged with the groove at the bottom of the door.
 - Check that all track mounting screws are tight.
- **Gaps around the door:**
 - Verify that the door is properly centered on the opening. Adjust track position if necessary.
 - Ensure the door panels are fully assembled and tight.

WARRANTY AND SUPPORT

FREDBECK stands behind the quality of its products. For any questions regarding assembly, installation, missing parts, or warranty claims, please contact FREDBECK customer support. Keep your purchase receipt as proof of purchase.

Contact information can typically be found on the product packaging or the official FREDBECK website.